



# Product Image Specification

## GS1 Standards Document

*Issue 2.6, Ratified, Nov-2014*



## Document Summary

Document Item	Current Value
Document Title	Product Image Specification - GS1 Standards Document
Date Last Modified	Nov-2014
Document Issue	Issue 2.66
Document Status	Ratified
Document Description	<p>This GS1 Standard establishes rules for the storage of digital images associated to products. The product identification number used is the Global Trade Item Number (GTIN) and this document provides details on all aspects of digital imaging storage. This document does not specify how the images should be delivered via electronic commerce. Image delivery is out of scope.</p> <p>These rules are based upon the guidelines that were originally developed in July 2005 by Voluntary Interindustry Commerce Solutions Association (VICS), <a href="http://www.vics.org">http://www.vics.org</a>, so there would be consistency in the use of digital images for trade facilitation.</p>

## Contributors

First Name	Last Name	Organization
Dan	Bauer	3M
Pierre	Brault	A. Lassonde
Randy	Burd	MultiAd Kwiikee
Nancy	Call	Lowes
Kim	Chalk	McCormick Canada
Dan	Clark	GS1 Canada
Matthew	Deeter	Deeterworks
Colleen	Dooley	Lawtons
Jean-Christophe	Gilbert	GS1 France
Rick	Gill	Home Depot
Neil	Gray	GS1 UK
Stephen	Jefferies	Inovis
Grant	Kille	Agentrics
Bruce	Laffee	Gladson
Rita	Laur	GS1 Canada
Melanie	Ligons	GXS
Wendy	Martin	Boots
Justin	Middleton	GS1 Australia
Steve	Moris	Scales Advertising
Olivier	Mouton	Carrefour
Glenn	Pride	1Sync

First Name	Last Name	Organization
Jane	Rosati	GS1 Canada
Robert	Tarrant	Brandbank
Gina	Tomassi	PepsiCo
Steve	Wallace	Brandbank
Jay	Yanko	Big Hammer

### VICS Contributors

Name	Organisation
Dan Bauer	3M
John DeMarco	3M
Patti Read	3M
Ed Sopia	Black & Decker
Gregg Manqialardi	Bosch
Bob Bieszka	Brass Craft
Mark Newton	ECCC
Mike Sadiwnyk	ECCC
Bruce Laffee	Gladson
Michael Chotiner	Hanlet Wood
Dave Pucciarella	Home Depot
Nate Perryman	Home Depot
Tim Knudson	Home Depot
Mae Kemp	Lowe's
Alex Dye	Master Lock
Randy Burd	MultiAd
Tom Boston	National Manufacturing
David Cieslik	Robert Bosch
Steve Moris	Scales Advertising
Richard Richardson	UCC
Jackie Jones	UCCnet
Jennifer Xiques	UCCnet
Susan Brozas	UCCnet
Frank Nash	UDEX
Bruce Hawkins	Wal-Mart

## Log of Changes in Issue 2.6

Issue No.	Date of Change	Changed By	Summary of Change
2006 06 29	2006 29 June	D. Buckley	Converted 'VICS Product Image Specification' into GS1-GSMP template format
2006 07 11	2006 11 July	R. Laur	Updated information for CR submission to GSMP
1	2006 08 December	GDSN/GSMP Imaging Specification Work Group	See analysis documentation.
2	2007 11 January	GDSN/GSMP Imaging Specification Work Group	See comment resolution document from GSMP Public Review
2.1	2007 07 February	GDSN/GSMP Imaging Specification Work Group	Errata to fix examples.
2.2	2007 13 February	GDSN BRG	Clarification of examples 4-2, 4-3, 4-4
2.3	2008 26 February	D.Clark	Clarification to planogram naming structure 2.1.5
2.4	2013 08 30	GDSN/GSMP Imaging Specification Work Group	WR # 12-046; 12-244; 12-253; 12-254; 12-255; 12-256; 12-257; 12-258; 12-259; 12-310; 12-312; 12-313; 12-322; 13-018; 13-040; 13-105
2.5	2014 03 11	Errata	Corrections to wording and examples added WR # 14-076
2.6	2014 07 03	Inclusion of 360° image specifications	WR # 14-023
2.6	2014 07 03	Extend the use of several code values for the 19th character of the image naming convention for use by single shot images with no supporting elements.	WR # 14-038
2.6	2014 07 03	Inclusion of Detail images	WR # 14-055
2.6	2014 07 03	Inclusion of Montage images	WR # 14-099

## Disclaimer

GS1, under its IP Policy, seeks to avoid uncertainty regarding intellectual property claims by requiring the participants in the Work Group that developed this **Product Image Specification** to agree to grant to GS1 members a royalty-free license or a RAND license to Necessary Claims, as that term is defined in the GS1 IP Policy. Furthermore, attention is drawn to the possibility that an implementation of one or more features of this Specification may be the subject of a patent or other intellectual property right that does not involve a Necessary Claim. Any such patent or other intellectual property right is not subject to the licensing obligations of GS1. Moreover, the agreement to grant licenses provided under the GS1 IP Policy does not include IP rights and any claims of third parties who were not participants in the Work Group.

Accordingly, GS1 recommends that any organization developing an implementation designed to be in conformance with this Specification should determine whether there are any patents that may encompass a specific implementation that the organization is developing in compliance with the Specification and whether a license under a patent or other intellectual property right is needed. Such a determination of a need for licensing should be made in view of the details of the specific system designed by the organization in consultation with their own patent counsel.

THIS DOCUMENT IS PROVIDED "AS IS" WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF THIS SPECIFICATION. GS1 disclaims all liability for any damages arising from use or misuse of this

Standard, whether special, indirect, consequential, or compensatory damages, and including liability for infringement of any intellectual property rights, relating to use of information in or reliance upon this document.

GS1 retains the right to make changes to this document at any time, without notice. GS1 makes no warranty for the use of this document and assumes no responsibility for any errors which may appear in the document, nor does it make a commitment to update the information contained herein.

# Table of Contents

<b>1. Introduction .....</b>	<b>8</b>
<b>2. Planogram Image and Data Field Specifications.....</b>	<b>8</b>
2.1. File Format .....	8
2.2. Views.....	8
2.3. Backgrounds and Cropping.....	8
2.4. Image Size .....	9
2.5. File Name Construction.....	9
2.6. Determining the front face.....	11
2.6.1. Default Front Face.....	11
2.6.2. Alternate Language .....	11
2.6.3. Consumer Display (not identified with GTIN) .....	11
<b>3. File Naming .....</b>	<b>12</b>
3.1. GTIN Based Naming .....	12
3.2. GDTI Based Naming .....	12
<b>4. Marketing Image Specifications.....</b>	<b>12</b>
4.1. Over all Supplied Photography Guidelines .....	12
4.2. File Characteristics.....	12
4.3. Guidelines for Image Colour and Quality .....	13
4.4. End Usage Formats .....	13
4.5. Product Photography .....	13
4.6. Clipping Paths .....	13
4.7. Image Size .....	14
4.8. File Format and Colour Mode .....	14
4.9. Product Views .....	14
4.10. File Name .....	15
4.11. GTIN Based File Name construction: Still Shot Single GTIN .....	15
4.12. GTIN Based File Name construction: Still Shot Single GTIN with Supporting Elements in Image ..	18
<b>5. Interactive digital assets.....</b>	<b>19</b>
5.1. 360* Imaging .....	20
5.1.1. Overall Supplied Photography Guidelines .....	20
5.1.2. File Characteristics.....	20
5.1.3. Guidelines for Image Colour and Quality .....	20
5.1.4. End Usage Formats .....	21
5.1.5. Product Photography.....	21
5.1.6. Backgrounds:.....	21
5.1.7. Clipping Paths .....	21
5.1.8. File Name .....	21

5.1.9.	Image Size.....	23
5.1.10.	File Format and Colour Mode File format: .....	23
5.1.11.	Number of images .....	23
5.1.12.	Direction of Rotation.....	23
5.1.13.	Image Sequence (Arc position).....	24
5.2.	360* Image Meta-data.....	24
5.2.1.	Image File Name .....	24
5.2.2.	Image Description .....	24
5.2.3.	Direction of Capture Rotation .....	24
5.2.4.	Image Sequence/ Arc position .....	25
<b>6.</b>	<b>Montage.....</b>	<b>25</b>
6.1.	Montage Naming.....	25
6.1.1.	Additional Identifiers for GTIN Based Naming .....	25
6.2.	Image Size .....	26
6.3.	Clipping Paths .....	26
6.4.	Image Size .....	26
6.5.	File Format and Colour Mode File format: LZW Compressed TIFF Colour Mode: RGB.....	26
<b>7.</b>	<b>Detail Image .....</b>	<b>26</b>
7.1.	Image File Type .....	26
7.2.	Image Size .....	27
7.3.	Clipping Paths .....	27
7.4.	File Name.....	27
7.4.1.	Additional Identifiers for GTIN Based Naming .....	27
<b>Appendix A – Source of Requirements .....</b>		<b>28</b>
<b>Appendix B – Reserved for Future Development.....</b>		<b>29</b>

# 1. Introduction

This GS1 Standard establishes rules for the storage of digital images associated to products. The product identification number used is the Global Trade Item Number (GTIN) and this document provides details on all aspects of digital imaging storage. This document does not specify how the images should be delivered via electronic commerce. Image delivery is out of scope.

These rules are based upon the guidelines that were originally developed in July 2005 by Voluntary Interindustry Commerce Solutions Association (VICS), <http://www.vics.org>, so there would be consistency in the use of digital images for trade facilitation.

It is important to note that digital assets (e.g. images) are only one part of what is needed. Data, both meta and associated, are essential for the timely and accurate usage of the assets. Additional information on minimum data requirements are outlined in the TIIG (Trade Item Integration Guideline)

## 2. Planogram Image and Data Field Specifications

### 2.1. File Format

File formats must be as follows, 72 ppi – 150ppi

- Targa - 16-32 bit (If 32 then alpha must be I/O), no compression
- JPEG - level of compression to be at 10 or above
- PNG - must be alpha channel compatible



**Note:** JPEG images are not alpha channel compatible with all imaging software.

### 2.2. Views

All products that are produced in a package should be represented with up to 6 views of the In-Package consumer pack, with 3 views as a minimum straight-on front, straight-on top, and straight-on left side views. Items that are not produced in a package, such as hammers, must be represented with the same above 3 views. An additional straight-on front view of an inner pack should be available when appropriate.

### 2.3. Backgrounds and Cropping

Images for contour products must appear with a transparent background. Images for contour and non-contour products must also be cropped to products' edge. No props or additional products are allowed within the primary image areas.

- Boxes type products are cropped to the edge and represented on a white background
- Hard corner boxes, were the cropped image leaves no background for close cropping alpha channel identification, shall be saved without a transparent layer level.
- Rounded or odd shaped type products should be contoured and represented with a transparent background
- Rounded or odd shaped type products can also be cropped to the products edge and represented on a white background.


## 2.4. Image Size

Minimum image size for all marketable face planogram images shall be 20kB minimum (50kB for Targa images)


## 2.5. File Name Construction

First 14 characters are the GTIN of the product (required). After the first period, the planogram view indicator will be present (required). GTINs with multiple graphic layouts that do not conflict with the GTIN allocation rules should be identified with 'A' for Alternative.

Examples:




07541230123457.1



07541230123457A.1



**Note:** If the GTIN is unique to a display or tray the image will be named using the display/tray GTIN as well as the inner product GTIN followed by its appropriate identifier ('T' for tray, 'D' for display, and 'A' for alternate)



07541230123457T.1



07541230123457D.1



**Note:** For peg hole flat products: If the product side 2,3,8 and 9 are less than 1/2cm and have no viewable marketing information images may be omitted.

### Valid image views are:

- straight on, front shot
- straight on, left view
- straight on, top view


### Optional image views:

- straight on, back shot
- straight on, right view
- straight on, bottom view


**The standard image naming indicators are:**

- (GTIN) .1 front face
- (GTIN) .2 left of front
- (GTIN) .3 top
- (GTIN) .7 back
- (GTIN) .8 right of front
- (GTIN) .9 bottom


See Images below for visual reference

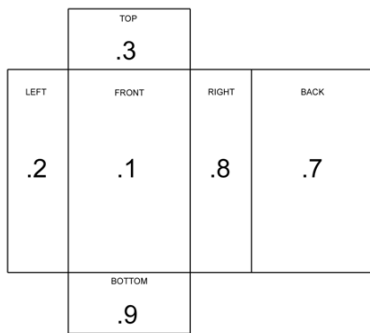


FRONT .1



Back .7

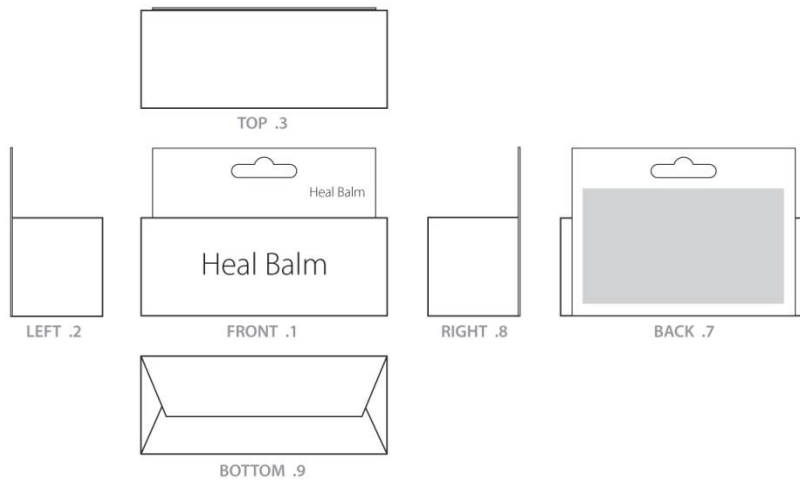

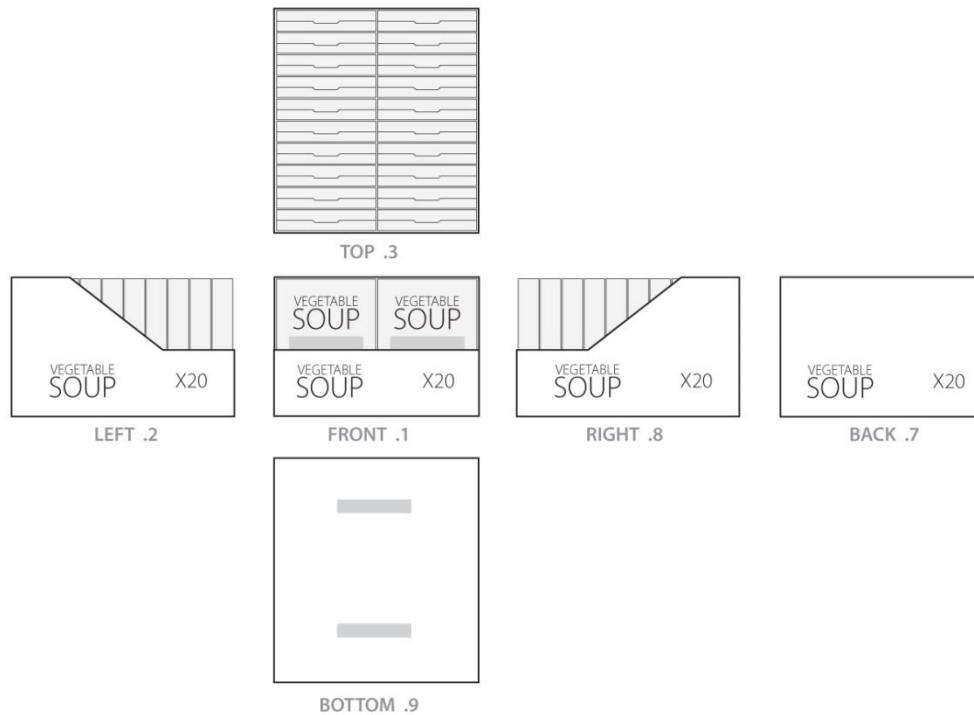

## 2.6. Determining the front face

### 2.6.1. Default Front Face

The front facing of the products is determined by the GDSN Package Measurement Rules (Section 4.2 Determining the Default Front of an Item). All other facings are taken in relation to the front face and are identified with a numerical extension identifying that face. Merchandisable facings are automatically captured as the numerical extension allows multiple images (and facings) for the same GTIN.

### 2.6.2. Alternate Language

Should there be alternate language facing on the packaging, there should be note of this in the data accompanying the images.

### 2.6.3. Consumer Display (not identified with GTIN)

Should the product be sold in a displayer/tray that does not bear its own unique GTIN, then the tray images should be captured using the unit GTIN appended with a "T" This will allow space management users to select either the unit or the tray when creating their planogram.

#### Examples:

- Unit: 00012345678905.1
- Tray: 00012345678905T.1

## 3. File Naming

The two naming methods are GTIN based and GDTI based.

- GTIN based naming should be used when the image contains a single item, which can be identified with a GTIN.
- GDTI based naming should be used for items not identified with a GTIN (e.g. RCN identified items in apparel, images containing multiple different GTINs) and where a single image can be applied to multiple products/items.

### 3.1. GTIN Based Naming

First 14 characters are the product specific GTIN.(Numeric)

- 15th Underscore spacer
- 16th File nature/type (simple designation AlphaNumeric). This section is dynamic (subject to frequent updates).



**Note:** Planogram images are exempt from this convention due to software application issues

### 3.2. GDTI Based Naming

All application rules based on GS1 Keys apply to this naming convention.

- the first 13 digits are the GDTI
- (optional) the next 1-17 alpha numeric characters are the serial component



**Note:** Planogram images are exempt from this convention due to software application issues

## 4. Marketing Image Specifications

### 4.1. Over all Supplied Photography Guidelines

It is understood that there will be instances where photography, other than “product” photography will be needed. Also, situations may arise where product shots are needed at a size or resolution that exceeds the above-mentioned standards. In these cases, it will be up to the customer to either originate the photography themselves, or work out arrangements with the vendor to supply said photography on an “as needed” basis. ALL supplied photography should conform to the guidelines listed below.

### 4.2. File Characteristics

No alpha channels or layers, guides or rulers. No bubbles, fingerprints or Newton rings from scans. No transfer functions or postscript colour management. No signatures, “finger printing” or visible watermarks. No compression artefacts. No interpolation (“resizing up”). No scanning from printed pages. No evidence of dust or scratches. No manufactured shadows. Moiré Patterns should be minimized.

### 4.3. Guidelines for Image Colour and Quality

Recommendations for quality image capture and processing:

- No colour casts. Colour should be as rich, vibrant and eye-catching as possible. Colour should be balanced over-all and not “blown-out” in highlights. Flesh tones and grass should be realistic and life-like.
- Reflections should also be realistic.
- Shadows should be realistic and neutral.
- Retouching should be as seamless and undetectable as possible and be convincing at a minimum of 200% magnification (i.e. removal of expiration/best before dates).
- Colour should be matched to product PMS colours (list to be provided by designer). If PMS colour is not available or if colour is proprietary, users must either match as closely as possible to colour swatches or the actual RGB breakdown must be provided.
- The image should be photographed with large depth of field so that the whole product is sharp.
- The Image should not be over sharpened in the (digital) image processing
- The lighting of product should be uniform when the image is taken.


 **Note:** Please see section [2.5 File Name Construction](#) for indication of new product or promotional tag rules.

### 4.4. End Usage Formats

It is recognized that due to the many potential combinations of format, resolution and size in end user applications, it is not possible to enumerate all possibilities in a standard. It is the understanding that the specifications recommended for advertising images are of sufficiently high quality that they will provide a source image that can be repurposed by the end user for their own specific applications. This includes different print media formats and items as well as Ecommerce (electronic) images.

### 4.5. Product Photography

Decisions as to whether products should be photographed in the package, out of package, or both, should be made based on the presentation of the product in a live sale scenario (i.e. box of cereal on a shelf vs. a lawnmower on display). If there are doubts as to which format is most appropriate both should be taken and appropriately identified. This decision should be communicated to the manufacturer. The image should be cropped close to the object.

 **Note:** No props or additional objects should be in the frame (for this nature/type – see section on File Name Construction). This applies to still shots for products (single GTIN).

#### **Backgrounds:**

All backgrounds must be knocked out to white (RGB 255/255/255).

### 4.6. Clipping Paths

All images must contain one active clipping path, properly created, in order for the product to be silhouetted. It is very important for the purpose of batch image repurposing that the clipping path be named “Path 1.” Default flatness setting should be 1-device pixels.

## 4.7. Image Size

### Standard Resolution

Minimum image size 900 pixels (75mm (3.0 in.)

Maximum image size 2400 pixels (200mm (8.0 in.)

Image size to be a 1:1 square aspect ratio (i.e. 900 pixels X 900 pixels)

File resolution: 300 ppi

### High Resolution

Minimum image size 2401 pixels (200.08 mm (8.003 in.

Maximum image size 4800 pixels (400mm (16.0 in.)

Image size to be a 1:1 square aspect ratio (i.e. 3000 pixels X 3000 pixels)

File resolution: 300 ppi

## 4.8. File Format and Colour Mode

File format: LZW Compressed TIFF Colour Mode: RGB


Delivery of the image will be at the minimum image quality and trading partner agreements can dictate the storage of the image in an alternate format, i.e., JPEG or PNG format

- ✔ **Note:** The ICC profile or exact colour space must be known and defined. The preference for storage of the source file is RGB 8 bit per channel.

## 4.9. Product Views

All products should have a maximum of 3 separate views when warranted per marketable face – a front view taken at 15 degrees top from centre is preferred for 3D images, however some products may require a steeper or shallower angle to display effectively. For 2D images (images of products with negligible depth properties) a 0 degree plunge angle is permitted.

Figure 1 Example Plunge Angle

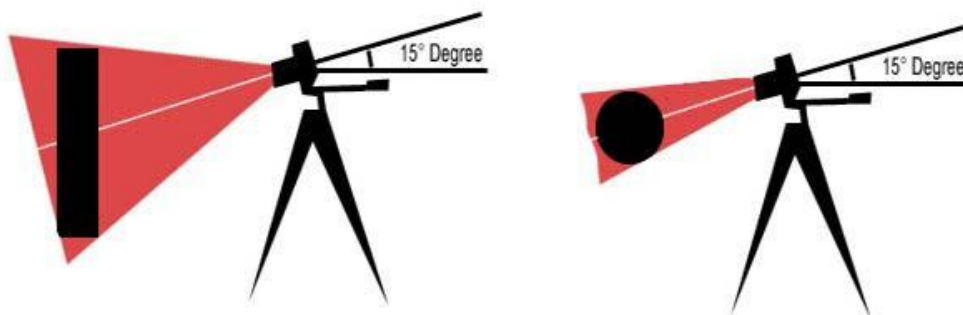

## 4.10. File Name

A significant portion of the Marketing image standard covers the naming conventions to identify the views represented by each image. There could be multiple languages on a product leading to exceptionally long file names. There could also be more than one marketing view available for a product. The same product in Country A with bilingual packaging will not have the same GTIN as the version sold in Country B which has another set of languages. The languages on the packaging will be unique to the specific product GTIN. When all merchandisable views contain all languages present on packaging, there is no need for a language indicator (Example default in-package, primary merchandisable view). Only when alternate views exist unique language facings require a unique language indicator (Alternate side of same product with alternate language view - in this case the English view would add the “\_en” to the file name).

This leads to the other key aspect of identification. When faced with multiple merchandisable faces, which is the primary. To resolve this, refer to the existing standards for determining the front face found in the GDSN Package Measurement Rules (see the following excerpt).

*4.2. Determining the Default Front of an Item: Prior to any measurement capture, the Default Front of the trade item must be determined. For the purposes of this standard, the Default Front is the side with the largest surface area that is used by the manufacturer to “sell” the product to the consumer, in other words, the side with markings such as the product name.*

### Example:



00012345678905\_A1C1\_1215\_s01.jpg

GTIN	0012345678905
Image type	Still Shot Single GTIN
Facing	Front
Angle	Center
State	In package
Image End Date	Dec 2015
Sequence Number	01

## 4.11. GTIN Based File Name construction: Still Shot Single GTIN

**Note:** Note for digits 1-15 see section [3 File Naming](#).

### 16<sup>th</sup> File Nature/Type:

- A - Still shot product single GTIN
- C - Still shot product single GTIN (High Resolution)
- Z – Undetermined

**17<sup>th</sup> Facing indicator:** As with planogram images a front determination is required with all subsequent faces relative to the front face.

- 0 Not applicable
- 1 Front
- 2 Left
- 3 Top
- 7 back
- 8 right
- 9 bottom

**18<sup>th</sup> Angle identifier:** Angle reference relative to the face being represented

- (C) Center
- (L) Left
- (R) Right
- (N) No Plunge

**19<sup>th</sup> In/Out of packaging**

- (1) In packaging
- (0) Out of packaging
- (A) Case
- (B) Innerpack
- (C) Raw/uncooked
- (D) Prepared

The following characters are optional additions to be used if the product being imaged requires them in the order in which they should appear.

- 20<sup>th</sup> Underscore to separate optional identifiers
- 21<sup>st</sup> ++ characters:




**Note:** Due to some operating system requirements (FAT32), it is recommended to limit the length of the file name to 32 characters, including the suffix.

- Language Indicator (2 character alpha):
  - ISO639 format - Example syntax for populating a country variation of a Language Code attribute: aa or optionally aa-BB where aa = ISO 639-1 code list, must be lower case where BB = ISO 3166-1 Country Code, 2 Alpha character representation, must be upper case to be used only if multiple faces of dissimilar languages occur
  - Image end date/promotional (4 character numeric)  
MMYY that image is valid until (i.e. If good until 1206 (Dec 2006) then to be removed after 01 January 2007.
- Sequence Number (3 character alphanumeric):
  - lowercase 's' followed by 2 numeric digits for Sequence number will be added at the end of file name with the following format:  
xxxx\_sNN (underscore, lowercase "s" and then 2 numeric mandatory)


### Examples

Examples: Please note that (GTIN) in the examples represents the 14 digit product GTIN


**Figure 2** Example default in-package, primary merchandisable view all angles

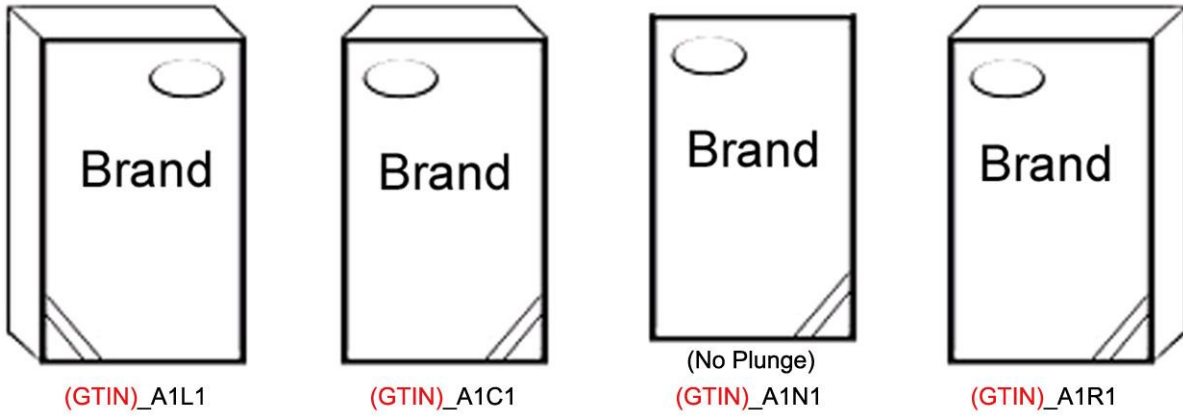


**Figure 3** Product with alternate Marketable faces  
 \*Note tallest vertical face is designated as face '1'

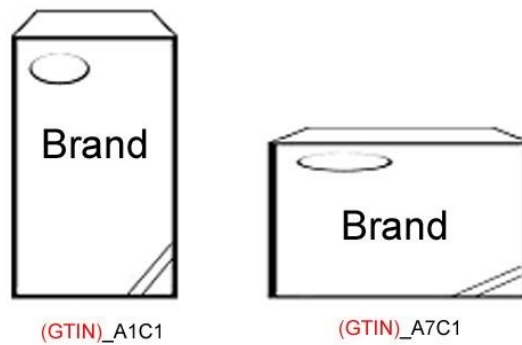

**Figure 4** Same product with multiple marketable faces containing dissimilar languages

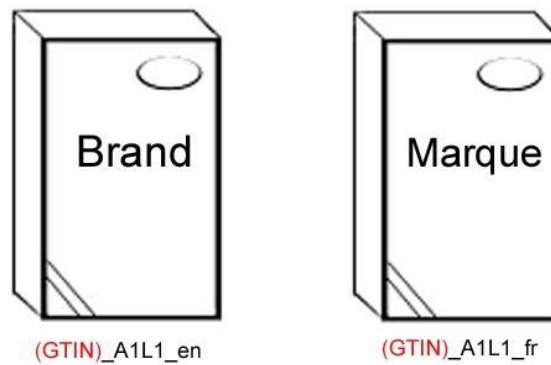

**Figure 5** Promotional end date for time specific packaging

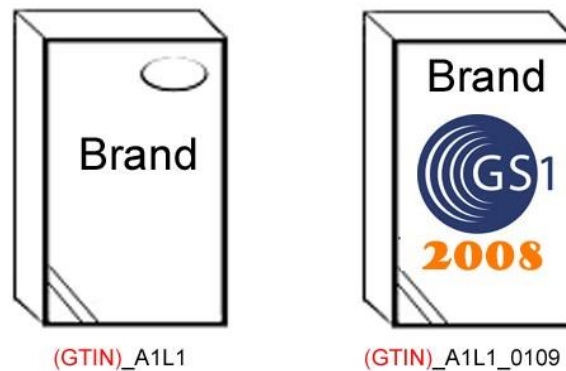

#### 4.12. GTIN Based File Name construction: Still Shot Single GTIN with Supporting Elements in Image

Note for digits 1-15 see File Naming section.

##### 16<sup>th</sup> File Nature/Type:

- B - Still shot product single GTIN with Supporting Elements in Image
- D - Still shot product single GTIN with Supporting Elements in Image (High Resolution)
- Z - Undetermined

**17<sup>th</sup> Facing indicator:** As with planogram images a front determination is required with all subsequent faces relative to the front face.

- 1 Front
- 2 Left
- 3 Top
- 7 back
- 8 right
- 9 bottom

**18<sup>th</sup> Angle identifier:** Angle reference relative to the face being represented

- (C) Center
- (L) Left
- (R) Right
- (N) No Plunge

**19<sup>th</sup> In/Out of packaging**

- (1) In packaging
- (0) Out of packaging
- (A) Case

- (B) Innerpack
- (C) Raw/uncooked
- (D) Prepared
- (E) Plated
- (F) Styled
- (G) Staged
- (H) Held
- (J) Worn
- (K) Used
- (L) Family
- (M) Open Case

The following characters are optional additions to be used if the product being imaged requires them in the order in which they should appear.

- 20<sup>th</sup> Underscore to separate optional identifiers
- 21<sup>st</sup> ++ characters:



**Note:** Due to some operating system requirements (FAT32), it is recommended to limit the total number of characters in the file name to 32 (including suffix).

- Language Indicator (2 character alpha):
  - ISO639 format - Example syntax for populating a country variation of a Language Code attribute: aa or optionally aa-BB where aa = ISO 639-1 code list, must be lower case where BB =ISO 3166-1 Country Code, 2 Alpha character representation, must be upper case to be used only if multiple faces of dissimilar languages occur
  - Image end date/promotional (4 character numeric)  
MMYY that image is valid until (ie. If good until 1206 (Dec 2006) then to be removed after 01 January 2007.
- Sequence Number (3 character alphanumeric):
  - lowercase 's' followed by 2 numeric digits for Sequence number will be added at the end of file name with the following format:  
**xxxx\_sNN** (underscore, lowercase "s" and then 2 numeric mandatory)

## 5. Interactive digital assets

### 360 imaging vs. 3D interactive imaging vs. 3D modeling

Although these terms can often be misapplied here is a general definition of these digital entities:

360 degree imaging is product photography on a single axis – the product rotates on a single axis while the camera takes pictures at specified degree intervals. The images taken of a product can be associated together in a viewer; to allow for an interactive image to be created that can be rotated by the user to replicate a sense of a physical product in a digital setting.

3-D product interactive photography is 360\* product photography on more than one axis. When the images are edited, formatted, and associated to the viewer, the consumer can rotate the product along the sides and the top – this is a 3D interactive image.

3D modeling is a process whereby a digital framework is created and then graphic layers are applied or created to ‘build’ a virtual object which, through software, can be rotated in any direction, to allow for an interactive object to be created that can be manipulated by the user.

## 5.1. 360\* Imaging

360 degree imaging is product photography on a single axis – the product rotates on a single axis while the camera takes pictures at specified degree intervals.

### 5.1.1. Overall Supplied Photography Guidelines

It is understood that there will be instances where photography, other than “product” photography will be needed. Also, situations may arise where product shots are needed at a size or resolution that exceeds the below-mentioned standards. In these cases, it will be up to the customer to either originate the photography themselves, or work out arrangements with the vendor to supply said photography on an “as needed” basis. ALL supplied photography should conform to the guidelines listed below.

### 5.1.2. File Characteristics

No alpha channels or layers, guides or rulers. No bubbles, fingerprints or Newton rings from scans. No transfer functions or postscript colour management. No signatures, “finger printing” or visible watermarks. No compression artifacts. No interpolation (“resizing up”). No scanning from printed pages. No evidence of dust or scratches. No manufactured shadows. Moiré Patterns should be minimized.

### 5.1.3. Guidelines for Image Colour and Quality

Recommendations for quality image capture and processing:

- No colour casts. Colour should be as rich, vibrant and eye-catching as possible. Colour should be balanced over-all and not “blown-out” in highlights. Flesh tones and grass should be realistic and life- like.
- Reflections should also be realistic.
- Shadows should be realistic and neutral.
- Retouching should be as seamless and undetectable as possible and be convincing at a minimum of 200% magnification (i.e. removal of expiration/best before dates.)
- Colour should be matched to product PMS colours (list to be provided by designer). If PMS colour is not available or if colour is proprietary, users must either match as closely as possible to colour swatches or the actual RGB breakdown must be provided.
- The image should be photographed with large depth of field so that the whole product is sharp.
- The Image should not be over sharpened in the (digital) image processing
- The lighting of product should be uniform when the image is taken.

\*\*Please see the section on File Name Construction for indication of new product or promotional tag rules.

#### 5.1.4. End Usage Formats

It is recognized that due to the many potential combinations of format, resolution and size in end user applications, it is not possible to enumerate all possibilities in a standard. It is the understanding that the specifications recommended for 360\* images are of sufficiently high quality that they will provide a source image that can be repurposed by the end user for their own specific applications.

#### 5.1.5. Product Photography

Decisions as to whether products should be photographed in the package, out of package, or both, should be made based on the presentation of the product in a live sale scenario (i.e. box of cereal on a shelf vs. a lawnmower on display). If there are doubts as to which format is most appropriate both should be taken and appropriately identified. This decision should be communicated to the manufacturer.

#### 5.1.6. Backgrounds:

All backgrounds should be white, or have a white background applied if clipping paths are added.

#### 5.1.7. Clipping Paths

Clipping paths are optional.

If used all paths should be named "Path 1"

#### 5.1.8. File Name

There are two file naming parameters: GTIN based and GDTI based. Both naming structures follow the same basic parameters with regards to product orientation and identification of start point, specifically the product front. GDSN Package Measurement Rules cited below identify how the front facing is chosen.

*6.8.1.3.2 "For the purposes of this standard, the Default Front is the side with the largest surface area that is used by the manufacturer to 'sell' the product to the consumer, in other words, the side with markings such as the product name."...*

*"Some product packages have more than one possible front with the same surface area. These products can be presented both vertically and horizontally on the shelves. If a product package has more than one possible front, the highest side is considered to be the Default Front"...*

##### The two naming methods:

- GTIN based naming can be used when the image contains a single item, which can be identified with a GTIN.
- GDTI based naming must be used for items not identified with a GTIN (e.g. RCN identified items in apparel, images containing multiple different GTINs) and where a single image can be applied to multiple products/items.

##### 5.1.8.1. GDTI Based Naming

All application rules based on GS1 Keys apply to this naming convention.

- The first 13 digits are the GDTI - this identifies the type of digital asset
- The next 1-17 alpha numeric characters are the serial component - this component uniquely identifies the image


Specifications related to Image arc position; plunge angle, etc... **MUST** be transmitted along with the image set for accurate processing, either through embedded XML data, or through associated data tables/links.

### 5.1.8.2. GTIN Based Image Naming


When GTIN based image naming is used, the following naming structure shall be employed:

Position	Marking
1-14 (GTIN)	N <sub>1</sub> .....N <sub>14</sub>
15 (separator)	_
16 (image type: 360)	E
17 (facing type)	N <sub>1</sub>
18 (separator)	_
19-20	Plunge angle
21 (separator)	_
22-24	Arc position
25 (separator)	_
26-28 (serialization)	sNN

- (1-14) GTIN of product Imaged
- (15) '\_' used as a separator for manual identification
- (16) 'E' image type identifier (E: 360\* image)
- (17) N<sub>1</sub> - Numeric identifier to identify facing type
  - 1 - Front face (as per GDSN Package Measurement Rules)
  - 2 - Alternate view (horizontal/ secondary marketable face)
 \*\*the Facing type identifier shall remain constant for the naming of the image series.
- (18) '\_' used as a separator for manual identification
- (19-20) NN - numeric plunge angle (00-90) of capture source;
  - '00' being the value attributed for no plunge angle
  - '90' Being the value for position of the capture source directly above the item.

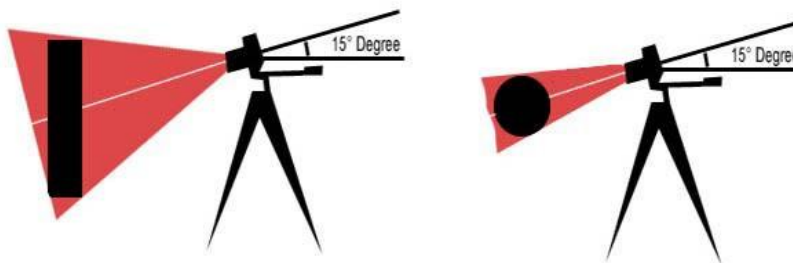

- (21) '\_' used as a separator for manual identification
- (22-24) NNN - Numeric Arc position value (000-359)
- (25) '\_' used as a separator for manual identification
- (only to be used in conjunction with Sequence Number)**
- (26-28) 'sNN' Sequence Number (3 character alphanumeric): lowercase 's' followed by 2 numeric digits for Sequence number will be added at the end of file name **(Optional)**

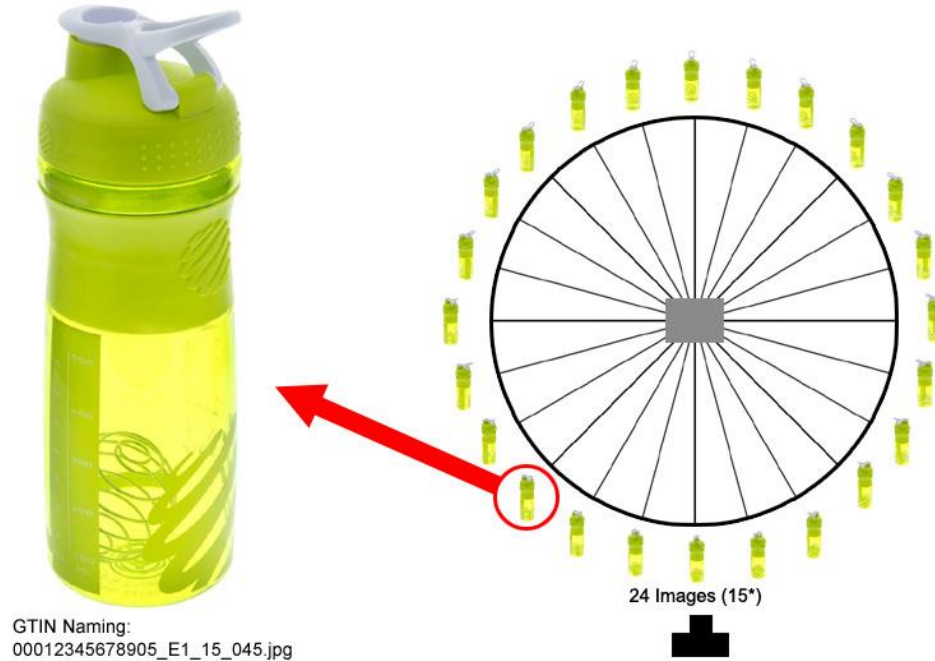

#### 5.1.9. Image Size

Image size for all 360\* images is to be 400 pixels minimum.

Image size to be a 1:1 square aspect ratio (i.e. 400 pixels X 400 pixels)

File resolution: 150 ppi

#### 5.1.10. File Format and Colour Mode File format:

JPEG or PNG format Colour Mode: RGB

Delivery of the image will be at the minimum image quality.

Trading partner agreements can dictate the delivery of the image in an alternate format, i.e., HTML5 or FLASH format

- ✔ **Note:** The ICC profile or exact colour space must be known and defined. The preference for storage of the source file is RGB 8 bit per channel.

#### 5.1.11. Number of images

Minimum of 24 images (Maximum 360)

- ✔ **Note:** Larger items would benefit from an increased number of images to ensure a fluidity of motion. Industry applications should be considered for total image count.

#### 5.1.12. Direction of Rotation

The direction of rotation for image capture should be Clockwise.

Direction is determined from observing the sequence of images of the item from a centre top vantage point, looking down upon the object.

### 5.1.13. Image Sequence (Arc position)

The image sequence should be identified in the image name, or associated data, and should follow the stitching sequence used to complete the 360° pattern or mapping.

## 5.2. 360° Image Meta-data

Meta data refers to those key image attributes which enable image Users to understand the properties of 360 images. It is recommended that meta-data be physically encoded within each image. This enables trading partners to identify and reference essential image information (carried by the image itself) when access to master image data details is not available.

### 5.2.1. Image File Name


**Definition:** Unique file name based on the GS1 GDTI naming convention

### 5.2.2. Image Description

**Definition:** Free-form text describing the image and how it relates to other images

### 5.2.3. Direction of Capture Rotation

**Definition:** The direction of travel following the rotation of an analogue clock in normal operation. (Clock-wise)

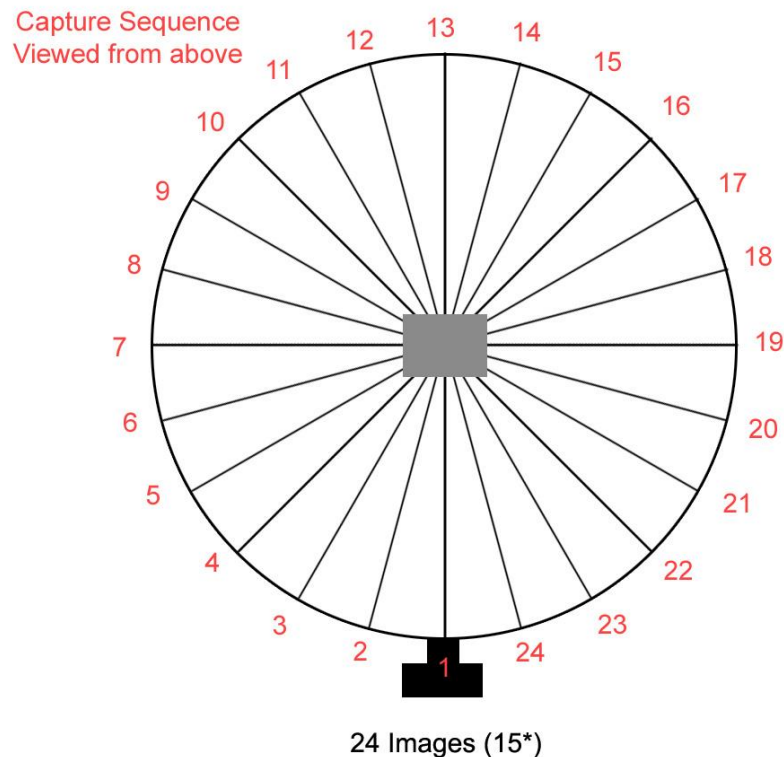

### 5.2.4. Image Sequence/ Arc position

Definition: the logical identification of a series of images captured for a specific purpose with a defined start and end with the goal of simulating movement.

For the 360° image type, it is recommended that the image numbering should be relative to the degree of rotation. This value will be derived from the first image as 0° and continue in a clockwise fashion.

(i.e. 24 images: image 1: 0; image 2: 15; image 3: 30; etc...)

This naming structure allows for the addition of images to a maximum of one image per degree of rotation.

## 6. Montage

A Montage is the physical over layering of distinct images to create a final digital image.

This process allows for a composite to be created with the future possibility of reconstruction without having to return to studio for correction, should an element be added or removed.

### 6.1. Montage Naming

Either a GDTI or GTIN based file name can be used to identify the image (see section 3 File Naming).


#### GDTI Based Naming

All application rules based on GS1 Keys apply to this naming convention.

- The first 13 digits are the GDTI - this identifies the type of digital asset
- The next 1-17 alpha numeric characters are the serial component - this component uniquely identifies the image

#### 6.1.1. Additional Identifiers for GTIN Based Naming

For Montage Images, the GTIN used in the naming should be the GTIN the image is to be linked to.

 **Note:** Note for digits 1-15 see section [3 File Naming](#).

#### 16<sup>th</sup> File Nature/Type:


- M – Montage Image

#### 17<sup>th</sup> ++ Sequence Number

Underscore followed by a unique image reference.



Still Shot Single GTIN  
00012345678905\_A1C1.jpg

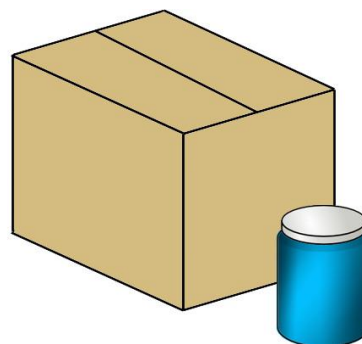

Montage Image  
00012345678905\_M\_002.jpg

## 6.2. Image Size

Image size for all montages should be relative to the smallest image used in its creation. Over enlargement (or 'zooming') causes pixilation to occur.

Image size to be a 1:1 square aspect ratio

File resolution: 300ppi

## 6.3. Clipping Paths

All images must contain one active clipping path, properly created, in order for the product to be silhouetted. It is very important for the purpose of batch image repurposing that the clipping path be named "Path 1." Default flatness setting should be 1-device pixels.

## 6.4. Image Size

### Standard Resolution

Minimum image size 900 pixels (75mm (3.0 in.))

Maximum image size 2400 pixels (200mm (8.0 in.))

Image size to be a 1:1 square aspect ratio (i.e. 900 pixels X 900 pixels)

File resolution: 300 ppi

### High Resolution

Minimum image size 2401 pixels (200.08 mm (8.003 in.))

Maximum image size 4800 pixels (400mm (16.0 in.))

Image size to be a 1:1 square aspect ratio (i.e. 3000 pixels X 3000 pixels)

File resolution: 300 ppi

## 6.5. File Format and Colour Mode File format: LZW Compressed TIFF Colour Mode: RGB

Delivery of the image will be at the minimum image quality and trading partner agreements can dictate the storage of the image in an alternate format, i.e., JPEG or PNG format



**Note:** The ICC profile or exact colour space must be known and defined. The preference for storage of the source file is RGB 8 bit per channel.

## 7. Detail Image

A detail image is a photo, line art or other graphic representation of a specific product characteristic. It is used to highlight a specific detail or characteristic of an item See examples:

### 7.1. Image File Type

The image type can be any format, but should follow the common web based image types for general use (JPG; PNG; GIF).

## 7.2. Image Size

Minimum image size 300 pixels (25mm (1.0 in.))

Maximum image size 4200 pixels (400mm (16.0 in.))

Image size to be a 1:1 square aspect ratio (i.e. 900 pixels X 900 pixels)

File resolution: 300 ppi

## 7.3. Clipping Paths

Due to the nature of the image, a clipping path is not required; however excessive whitespace should be kept at a minimum.

## 7.4. File Name

Either a GDTI or GTIN based file name can be used to identify the image (see section 3 File Naming).

\*\*It is important to note that if a single image is to be used as a Detail Image, it is preferable to use GDTI naming.

### 7.4.1. Additional Identifiers for GTIN Based Naming




**Note:** Note for digits 1-15 see section [3 File Naming](#).

#### 16<sup>th</sup> File Nature/Type:


- F – Detail Image

#### 17<sup>th</sup> ++ Sequence Number

Underscore followed by a unique image reference.

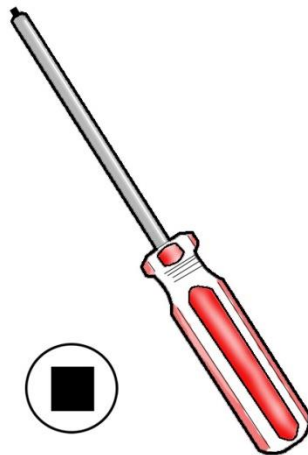

Montage Image  
00012345678905\_M\_002.jpg



Detail Image  
00012345678905\_F\_001.jpg

## Appendix A – Source of Requirements

It should be noted that the source of the requirements leading to the development of this standard are several related GSMP change requests. The change requests are listed below:

- CR 05-000077
- CR 05-000320
- CR 06-000163

## Appendix B – Reserved for Future Development

Section	Heading	Description	16th Character	Date Added	Date Modified	CR Number
4.11	Still Shot Single GTIN	Image of one GTIN, regardless of multiple formats/designs, on a white background	A	1/10/2007		
4.12	Still shot product single GTIN with Supporting Elements in Image	Image of one GTIN with supporting elements, regardless of multiple formats/designs, on a white background	B	12/13/2012		12-256
4.11	Still shot product single GTIN (High Resolution)	Image of one GTIN, regardless of multiple formats/designs, on a white background (High Resolution)	C	30/08/2013		12-322
4.12	Still shot product single GTIN with Supporting Elements in Image (High Resolution)	Image of one GTIN with supporting elements, regardless of multiple formats/designs, on a white background (High Resolution)	D	30/08/2013		12-322
5.1	360* Imaging	360 degree imaging is product photography on a single axis – the product rotates on a single axis while the camera takes pictures at specified degree intervals.	E	18/07/2014		14-023
7.0	Detail	A detail image is a photo, line art or other graphic representation of a specific product characteristic.	F	18/07/2014		14-055
6.0	Montage	A Montage is the physical over layering of distinct images to create a final digital image.	M	18/07/2014		14-099
-	Undefined		Z	1/10/2007		
	Line Art	Line art rendering of a single GTIN		TBD		
	Graphic Rendering	Line art rendering of a single GTIN C TBD		TBD		
	Safety Data Sheet	Safety specifications related to GTIN		TBD		
	Manufacturer Documentation	Safety specifications related to GTIN		TBD		
	3D Motion	A 3D representation incorporating movement		TBD		
	Audio/ Soundtrack	TBD		TBD		
	Movie/ Audio-visual	TBD		TBD		
	Interactive TBD G TBD	TBD		TBD		



	GTIN Certificates	Certification/Validation specific to the GTIN		TBD		
--	-------------------	---	--	-----	--	--