



The Global Language of Business

# eCom Common Library Business Message Standard (BMS)

*Release 3.3, Ratified, Mar 2017*



## Document Summary

Document Item	Current Value
Document Name	GS1 Document Name Business Message Standard (BMS)
Document Date	Mar 2017
Document Version	3.3
Document Issue	1
Document Status	Ratified

## Work Request Reference

Date of WR Submission to GSMP:	WR Submitter(s):	Refer to Work Request (WR) Number(s):
02-Jul-2012	GS1 Germany	WR 12-199
03-Apr-2012	GS1 Australia	WR 12-139
09-Jul-2013	Philips Electronics N.V.	WR 13-106
26-Nov-2013	Philips Electronics N.V.	WR 13-188
27-Nov-2013	DHL	WR 13-192
29-Nov-2013	GS1 Spain	WR 13-194
06-Dec-2013	Philips Electronics N.V.	WR 13-198
13-Dec-2013	GS1 Germany	WR 13-204
07-Feb-2014	GS1 Germany	WR 14-022
07-May-2014	GS1 Germany	WR 14-074
20-May-2014	GS1 Germany	WR 14-084
25-Jun-2014	GS1 GO	WR 14-110
24-Aug-2015	3M Deutschland	WR 15-238
11-Sep-2015	JDA	WR 15-282
28-Oct-2015	Philips Electronics N.V.	WR 15-314
18-Jan-2016	GS1 Germany	WR 16-020
18-Jan-2016	GS1 Germany	WR 16-021
18-Jan-2016	GS1 Germany	WR 16-022
18-Jan-2016	GS1 Germany	WR 16-030
18-Jan-2016	GS1 Germany	WR 16-031
18-Jan-2016	GS1 Germany	WR 16-032
18-Jan-2016	GS1 Germany	WR 16-035
18-Jan-2016	GS1 Germany	WR 16-039
18-Jan-2016	GS1 Germany	WR 16-041
18-Jan-2016	GS1 Germany	WR 16-046
18-Jan-2016	GS1 Germany	WR 16-047
18-Jan-2016	GS1 Germany	WR 16-048
18-Jan-2016	GS1 Germany	WR 16-051
18-Jan-2016	GS1 Germany	WR 16-052

Date of WR Submission to GSMP:	WR Submitter(s):	Refer to Work Request (WR) Number(s):
18-Jan-2016	GS1 Germany	WR 16-058
18-Jan-2016	GS1 Germany	WR 16-069
18-Jan-2016	GS1 Germany	WR 16-071
18-Jan-2016	GS1 Germany	WR 16-074
18-Jan-2016	GS1 Germany	WR 16-075
18-Jan-2016	GS1 Germany	WR 16-079
18-Jan-2016	GS1 Germany	WR 16-093
16-Feb-2016	A. Storck	WR 16-158
08-Apr-2016	GS1 France	WR 16-251
08-Apr-2016	GS1 France	WR 16-252
18-Apr-2016	GS1 France	WR 16-261
12-Jul-2016	GS1 GO	WR 16-340

## Document Change History

Date of Change	Version	Changed By	Reason for Change	Summary of Change
13-Oct-2011	BMS 3.0 - issue 1.0.0	Coen Janssen	Errata	Corrected some GDD definitions.
3-Jan-2012	BMS 3.0 - issue 1.1.0	John Ryu	Publication updates	See section summary of changes
1-May-2013	BMS 3.1 - issue 1	Coen Janssen	Publication	See section summary of changes
15-Sep-2014	BMS 3.2 - issue 1	Ewa Iwicka	BMS Release 3.2	See summary of changes
01-Mar-2017	BMS 3.3 - Issue 1	Ewa Iwicka	BMS Release 3.3	See summary of changes

## Disclaimer

GS1®, under its IP Policy, seeks to avoid uncertainty regarding intellectual property claims by requiring the participants in the Work Group that developed this **eCom Common Library Business Message Standard (BMS)** to agree to grant to GS1 members a royalty-free licence or a RAND licence to Necessary Claims, as that term is defined in the GS1 IP Policy. Furthermore, attention is drawn to the possibility that an implementation of one or more features of this Specification may be the subject of a patent or other intellectual property right that does not involve a Necessary Claim. Any such patent or other intellectual property right is not subject to the licencing obligations of GS1. Moreover, the agreement to grant licences provided under the GS1 IP Policy does not include IP rights and any claims of third parties who were not participants in the Work Group.

Accordingly, GS1 recommends that any organization developing an implementation designed to be in conformance with this Specification should determine whether there are any patents that may encompass a specific implementation that the organisation is developing in compliance with the Specification and whether a licence under a patent or other intellectual property right is needed. Such a determination of a need for licencing should be made in view of the details of the specific system designed by the organisation in consultation with their own patent counsel.

THIS DOCUMENT IS PROVIDED "AS IS" WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NONINFRINGEMENT, FITNESS FOR PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF THIS SPECIFICATION. GS1 disclaims all liability for any damages arising from use or misuse of this Standard, whether special, indirect, consequential, or compensatory damages, and including liability for infringement of any intellectual property rights, relating to use of information in or reliance upon this document.



GS1 retains the right to make changes to this document at any time, without notice. GS1 makes no warranty for the use of this document and assumes no responsibility for any errors which may appear in the document, nor does it make a commitment to update the information contained herein.

GS1 and the GS1 logo are registered trademarks of GS1 AISBL.

# Table of Contents

<b>1</b>	<b>Business Domain View .....</b>	<b>8</b>
1.1	Introduction .....	8
1.2	References .....	8
<b>2</b>	<b>Business Context .....</b>	<b>8</b>
<b>3</b>	<b>Business Transaction View .....</b>	<b>8</b>
<b>4</b>	<b>Business Information View .....</b>	<b>9</b>
4.1	Business Data Types.....	9
4.1.1	GDTI .....	9
4.1.2	Codes.....	10
4.1.3	Enumerations.....	27
4.2	Components .....	28
4.2.1	eCom GS1 Identification .....	28
4.2.2	Administrative Unit .....	31
4.2.3	Allowance Charge .....	32
4.2.4	Carrier Pick Up Drop Off Details .....	34
4.2.5	Carrier Track And Trace Information .....	35
4.2.6	Child Package Level .....	36
4.2.7	Collaborative Trade Item .....	37
4.2.8	Consignment Reference .....	38
4.2.9	Dangerous Goods Attribute .....	38
4.2.10	Dangerous Goods Information .....	39
4.2.11	Dangerous Goods Regulation Information .....	40
4.2.12	Deliver Date Information .....	41
4.2.13	Delivery Terms .....	42
4.2.14	Despatch Information.....	43
4.2.15	Digital Signature.....	44
4.2.16	Duty Fee Tax Registration .....	45
4.2.17	Ecom Document .....	46
4.2.18	Ecom_Attribute Value Pair List.....	47
4.2.19	Ecom String Attribute Value Pair List .....	48
4.2.20	Ecom_Document Reference.....	49
4.2.21	End Customer Related Details .....	50
4.2.22	Energy Quantity Calculation Conditions.....	51
4.2.23	Financial Institution Information .....	52
4.2.24	Handling Instruction.....	53
4.2.25	Identity Document .....	54
4.2.26	Incident Circumstances .....	55
4.2.27	Incident Details .....	56
4.2.28	Ink Stain Details .....	57
4.2.29	Installment Due.....	58
4.2.30	Inventory Duty Fee Tax Status .....	58
4.2.31	Inventory Status Quantity Specification .....	59
4.2.32	Inventory Sub Location.....	60
4.2.33	Invoice Document Reference .....	61

4.2.34	Legal Registration .....	62
4.2.35	Levied Duty Fee Tax.....	63
4.2.36	Location Information .....	65
4.2.37	Logistic Event.....	66
4.2.38	Logistic Location .....	67
4.2.39	Logistic Service .....	69
4.2.40	Logistic Service Reference.....	70
4.2.41	Logistic Unit .....	71
4.2.42	Logistic Unit Measurement .....	73
4.2.43	Logistic Units.....	74
4.2.44	Lower Level Trade Item .....	76
4.2.45	Operating Hours .....	77
4.2.46	Order Logistical Date Information .....	78
4.2.47	Order Logistical Information .....	80
4.2.48	Organisation .....	81
4.2.49	Package Total.....	82
4.2.50	Packaging Marking .....	83
4.2.51	Party Reference .....	84
4.2.52	Passenger Information .....	85
4.2.53	Payment Method.....	85
4.2.54	Payment Terms .....	87
4.2.55	Payment Terms Discount .....	88
4.2.56	Person.....	89
4.2.57	Quantity Specification.....	90
4.2.58	Referenced Order.....	91
4.2.59	Reference Number .....	92
4.2.60	Returnable Packaging .....	93
4.2.61	Shipment Reference.....	94
4.2.62	Shipment Transportation Information .....	95
4.2.63	Source Reference.....	96
4.2.64	Special Operating Hours .....	97
4.2.65	Trade Statistic Classification.....	98
4.2.66	Transactional Generic Reference .....	99
4.2.67	Transactional Item Certification .....	100
4.2.68	Transactional Item Data .....	101
4.2.69	Transactional Item Data Carrier and Identification .....	104
4.2.70	Transactional Item Logistic Unit Information .....	105
4.2.71	Transactional Item Organic Information.....	106
4.2.72	Transactional Party .....	107
4.2.73	Transactional Party In Role .....	108
4.2.74	Transactional Reference.....	109
4.2.75	Transactional Trade Item .....	110
4.2.76	Transport Cargo Characteristics .....	112
4.2.77	Transport Equipment.....	114
4.2.78	Transport Means.....	115
4.2.79	Transport Reference.....	116
4.2.80	Transport Seal.....	117
4.2.81	Transport Status.....	118
4.2.82	Transport Tracking Log Event .....	119

4.2.83	Transport Tracking Observation .....	120
4.2.84	Transport Tracking Sensor Observation .....	121
4.2.85	Unit Measurement.....	121
4.2.86	Waste Details .....	122
4.2.87	XHTML.....	123
4.3	Enumerations (message specific) .....	124
4.3.1	DebitCreditEnumeration.....	124
4.3.2	TransportPlanningDateTypeEnumeration.....	124
4.4	Code Lists .....	124
<b>5</b>	<b>Business Message Examples .....</b>	<b>129</b>
<b>6</b>	<b>Implementation Considerations.....</b>	<b>129</b>
<b>7</b>	<b>Summary of Changes .....</b>	<b>129</b>
7.1	BMS Release 3.0 .....	129
7.2	BMS Release 3.1 .....	130
7.3	BMS Release 3.2 .....	132
7.4	BMS Release 3.3 .....	139
<b>8</b>	<b>Appendices .....</b>	<b>153</b>
<b>9</b>	<b>Acknowledgements.....</b>	<b>153</b>
9.1.1	Work Group .....	153
9.1.2	Development Team Members .....	155

# 1 Business Domain View

## 1.1 Introduction

### Message Definition

This document defines components that are determined to be foundational to the eCom domain within GS1.

eCom components are used to enforce consistency across eCom messages and include:

- Transactional trade item details
- Transactional party details
- Logistic unit details
- Transport related information such as transport equipment, transport means.
- Financial information such as payment terms, financial accounts.

eCom components will be contained in a separate package and will be carefully managed to ensure that any changes that are made to any component do not have a negative impact across GS1 eCom messages.

## 1.2 References

Reference Name	Description
[BRAD_RQ] BRAD Requirements Queue	GS1, 2011
[BRAD_TM] BRAD Transport Management	GS1, 2011
[BMS_SHARED] BMS Shared Common release 3.3	GS1, 2014
[BRAD_WIO] BRAD Warehousing Inbound and Outbound Processes	GS1, 2012

# 2 Business Context

Context Category	Value(s)
Industry	All
Geopolitical	All
Product	All
Process	All
System Capabilities	All
Official Constraints	None

# 3 Business Transaction View

Not applicable




## 4 Business Information View

### 4.1 Business Data Types

#### 4.1.1 GDTI

##### Class Diagram

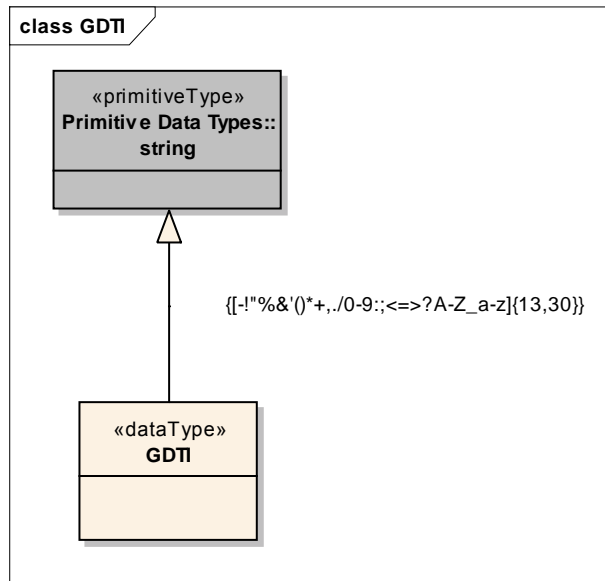

##### GDD Report

The content of the GDTI class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bdtList.aspx?semanticURN=urn:gs1:gdd:bdt:GDTI](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bdtList.aspx?semanticURN=urn:gs1:gdd:bdt:GDTI)

Key	Pattern	Description
GDTI	<code>[~!~%&amp;'()*+,-./0-9:;~?A-Z_a-z]{13,30}</code>	Minimum 13, Maximum 30 alphanumeric characters restricted to A-Z (uppercase), a-z (lowercase), 0-9, and the special characters listed (e.g. %, &, etc..) <sup>Note 1</sup>

### 4.1.2 Codes

#### Class Diagram



**Note:** Please note that all codes in the diagrams below are generalizations of “GS1Code” as indicated by the text in italics at the top right hand side of the classes.



## class Code A-I

<b>AdministrativeUnitTypeCode</b> «data Type» GS1Code	<b>AppointmentTimeMeasurementBasisTypeCode</b> «data Type» GS1Code	<b>AquaticSpeciesCode</b> «data Type» GS1Code	<b>CargoTypeCode</b> «data Type» GS1Code	<b>CatchAreaCode</b> «data Type» GS1Code
<b>CreditReasonCode</b> «data Type» GS1Code	<b>CustomsWarehouseStatusCode</b> «data Type» GS1Code	<b>DangerousGoodsAttributeTypeCode</b> «data Type» GS1Code	<b>DangerousGoodsRegulationCode</b> «data Type» GS1Code	<b>DataCarrierTypeCode</b> «data Type» GS1Code
<b>DeliveryDateTypeCode</b> «data Type» GS1Code	<b>DeliveryMethodCode</b> «data Type» GS1Code	<b>DeliveryTypeCode</b> «data Type» GS1Code	<b>DeliveryTimeMeasurementBasisTypeCode</b> «data Type» GS1Code	<b>DemandEstimationTypeCode</b> «data Type» GS1Code
<b>DiscountAgreementCode</b> «data Type» GS1Code	<b>DutyFeeTaxExemptionReasonCode</b> «data Type» GS1Code	<b>DutyFeeTaxTypeCode</b> «data Type» GS1Code	<b>EffectiveDateTypeCode</b> «data Type» GS1Code	<b>ErrorOrWarningCode</b> «data Type» GS1Code
<b>FinancialAdjustmentReasonCode</b> «data Type» GS1Code	<b>FishingGearTypeCode</b> «data Type» GS1Code	<b>ForecastPurposeCode</b> «data Type» GS1Code	<b>ForecastTypeCode</b> «data Type» GS1Code	<b>GoodsReceiptReportingCode</b> «data Type» GS1Code
<b>GS1ItemIdentificationKeyCode</b> «data Type» GS1Code	<b>HandlingInstructionCode</b> «data Type» GS1Code	<b>HarmonizedSystemCode</b> «data Type» GS1Code	<b>IdentityDocumentTypeCode</b> «data Type» GS1Code	<b>InventoryActivityTypeCode</b> «data Type» GS1Code
<b>InventoryMeasurementBasisTypeCode</b> «data Type» GS1Code	<b>InventoryMovementTypeCode</b> «data Type» GS1Code	<b>InventoryStatusCode</b> «data Type» GS1Code	<b>InventorySubLocationTypeCode</b> «data Type» GS1Code	<b>InvoiceTypeCode</b> «data Type» GS1Code
<b>InventorySubLocationFunctionCode</b> «data Type» GS1Code	<b>ItemScopeTypeCode</b> «data Type» GS1Code	<b>ItemTypeCode</b> «data Type» GS1Code		

## class Code J-P

«data Type» LegalRegistrationCode GS1Code	«data Type» LineItemActionCode GS1Code	«data Type» LocationScopeParameterTypeCode GS1Code	«data Type» LocationScopeTypeCode GS1Code	«data Type» LogisticEventTypeCode GS1Code
«data Type» LogisticServiceReferenceTypeCode GS1Code	«data Type» LogisticServiceRequirementCode GS1Code	«data Type» MarginSchemeCode GS1Code	«data Type» MaterialTypeCode GS1Code	«data Type» MeasurementTypeCode GS1Code
«data Type» ObservationTypeCode GS1Code	«data Type» OrderEntryTypeCode GS1Code	«data Type» OrderInstructionCode GS1Code	«data Type» OrderTypeCode GS1Code	«data Type» OrderRelationshipTypeCode GS1Code
«data Type» OwnershipTransferConditionCode GS1Code	«data Type» PackageTypeCode GS1Code	«data Type» PackageLevelCode GS1Code	«data Type» PackagingConditionCode GS1Code	«data Type» PackagingMarkingTypeCode GS1Code
«data Type» PackagingTermsCode GS1Code	«data Type» PassengerCategoryCode GS1Code	«data Type» PaymentFormatCode GS1Code	«data Type» PaymentTermsEventCode GS1Code	«data Type» PerformanceMeasureTypeCode GS1Code
«data Type» PeriodicityTypeCode GS1Code	«data Type» PlanBucketSizeCode GS1Code	«data Type» PlanCommitmentLevelCode GS1Code	«data Type» PrintingInstructionCode GS1Code	«data Type» ProductionMethodForFishAndSeafoodCode GS1Code
«data Type» PurchaseConditionsCommitmentTypeCode GS1Code	«data Type» OutOfStockMeasurementTypeCode GS1Code			

## class Code Q-Z

GS1Code «dataType» QualityControlCode	GS1Code «dataType» QuantitySpecificationTypeCode	GS1Code «dataType» ReceivingConditionCode	GS1Code «dataType» ReferenceNumberTypeCode	GS1Code «dataType» RemainingQuantityStatusCode
GS1Code «dataType» ResponseStatusCode	GS1Code «dataType» TransportChargesPaymentMethodCode	GS1Code «dataType» SalesMeasurementTypeCode	GS1Code «dataType» SealConditionCode	GS1Code «dataType» SealTypeCode
GS1Code «dataType» ServiceLevelBasisTypeCode	GS1Code «dataType» ServiceLevelMeasurementBasisTypeCode	GS1Code «dataType» SettlementHandlingTypeCode	GS1Code «dataType» SettlementTypeCode	GS1Code «dataType» SpecialServiceTypeCode
GS1Code «dataType» StockRequirementTypeCode	GS1Code «dataType» StorageStateCode	GS1Code «dataType» StructureTypeCode	GS1Code «dataType» SymbolComponentCode	GS1Code «dataType» SynchronisationCalculationTypeCode
GS1Code «dataType» TimePeriodScopeTypeCode	GS1Code «dataType» TradeItemDataOwnerCode	GS1Code «dataType» TradeItemUnitDescriptorCode	GS1Code «dataType» TransactionalReferenceTypeCode	GS1Code «dataType» TransportInstructionStatusReasonCode
GS1Code «dataType» TransportMeansTypeCode	GS1Code «dataType» TransportModeCode	GS1Code «dataType» TransportPartyRoleCode	GS1Code «dataType» TransportPaymentMethodCode	GS1Code «dataType» TransportReferenceTypeCode
GS1Code «dataType» TransportServiceCategoryCode	GS1Code «dataType» TransportServiceConditionTypeCode	GS1Code «dataType» TransportServiceLevelCode	GS1Code «dataType» TransportStatusConditionCode	GS1Code «dataType» TransportStatusReasonCode
GS1Code «dataType» UNLocationCode	GS1Code «dataType» VarianceReasonCode	GS1Code «dataType» WarehouseABCClassificationCode		

**GDD Report**

Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
AdministrativeUnitTypeCode				Code specifying an administrative unit type. Allowed code values are specified in GS1 Code List <a href="#">AdministrativeUnitTypeCode</a> .	
Generalization		GS1Code			
AppointmentTimeMeasurementBasisTypeCode				Code specifying an appointment time measurement basis type. Allowed code values are specified in GS1 Code List <a href="#">AppointmentTimeMeasurementBasisTypeCode</a>	
Generalization		GS1Code			
AquaticSpeciesCode				A code specifying the scientific name of the fish species. Allowed code values are specified in GS1 Code List <a href="#">AquaticSpeciesCode</a>	
Generalization		GS1Code			
CargoTypeCode				Code specifying a cargo type. Allowed code values are specified in GS1 Code List <a href="#">CargoTypeCode</a> .	
Generalization		GS1Code			
CatchAreaCode				This is a code list developed and managed by FAO, fully adopted by GS1. Allowed code values are specified in <a href="#">FAO code list</a> .	
Generalization		GS1Code			
CreditReasonCode				Code specifying a credit reason. Allowed code values are specified in GS1 Code List <a href="#">CreditReasonCode</a> .	
Generalization		GS1Code			
CustomsWarehouseStatusCode				Code specifying a customs warehouse status. Allowed code values are specified in GS1 Code List <a href="#">CustomsWarehouseStatusCode</a> .	
Generalization		GS1Code			
DangerousGoodsAttributeTypeCode				Code specifying a dangerous goods attribute type. Allowed code values are specified in GS1 Code List <a href="#">DangerousGoodsAttributeTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
DangerousGoodsRegulationCode				Code specifying a dangerous goods regulation. Allowed code values are specified in GS1 Code List <a href="#">DangerousGoodsRegulationCode</a> .	
Generalization		GS1Code			
DataCarrierTypeCode				Code specifying a data carrier type. Allowed code values are specified in GS1 Code List <a href="#">DataCarrierTypeCode</a> .	
Generalization		GS1Code			
DeliverDateTypeCode				Code specifying a deliver date type. Allowed code values are specified in GS1 Code List <a href="#">DeliverDateTypeCode</a> .	
Generalization		GS1Code			
DeliveryMethodCode				Code specifying a delivery time measurement basis type. Allowed code values are specified in GS1 Code List <a href="#">DeliveryMethodCode</a> .	
Generalization		GS1Code			
DeliveryTimeMeasurementBasisTypeCode				Code specifying a delivery time measurement basis type. Allowed code values are specified in GS1 Code List <a href="#">DeliveryTimeMeasurementBasisTypeCode</a> .	
Generalization		GS1Code			
DeliveryTypeCode				Code specifying a delivery type. Allowed code values are specified in GS1 Code List <a href="#">DeliveryTypeCode</a> .	
Generalization		GS1Code			
DemandEstimationTypeCode				Code specifying a demand estimation type. Allowed code values are specified in GS1 Code List <a href="#">DemandEstimationTypeCode</a> .	
Generalization		GS1Code			
DiscountAgreementCode				Code specifying base for discount, fee reduction or bonus. Allowed code values are specified in GS1 Code List <a href="#">DiscountAgreementCode</a> .	
Generalization		GS1Code			

Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
DutyFeeTaxExemptionReasonCode				Code specifying reason for being exempt of duty, fee or tax. Allowed code values are specified in GS1 Code List <a href="#">DutyFeeTaxExemptionReasonCode</a>	
Generalization		GS1Code			
DutyFeeTaxTypeCode				Code specifying a type of duty, fee or tax. Allowed code values are specified in GS1 Code List <a href="#">DutyFeeTaxTypeCode</a> .	
Generalization		GS1Code			
EffectiveDateTypeCode				Code specifying an effective date type. Allowed code values are specified in GS1 Code List <a href="#">EffectiveDateTypeCode</a> .	
Generalization		GS1Code			
ErrorOrWarningCode				Code specifying an error or warning. Allowed code values are specified in GS1 Code List <a href="#">ErrorOrWarningCode</a> .	
Generalization		GS1Code			
FinancialAdjustmentReasonCode				Code specifying a financial adjustment reason. Allowed code values are specified in GS1 Code List <a href="#">DataSourceCode</a> .	
Generalization		GS1Code			
FishingGearTypeCode				This is a code list developed and managed by FAO, fully adopted by GS1. Allowed code values are specified in <a href="#">FAO code list</a> .	
Generalization		GS1Code			
ForecastPurposeCode				Code specifying a forecast purpose. Allowed code values are specified in GS1 Code List <a href="#">ForecastPurposeCode</a> .	
Generalization		GS1Code			
ForecastTypeCode				Code specifying a forecast type. Allowed code values are specified in GS1 Code List <a href="#">ForecastTypeCode</a> .	
Generalization		GS1Code			





Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
GS1ItemIdentificationKeyCode				Code specifying the type of GS1 Identification Key. Allowed code values are specified in GS1 Code List <a href="#">GS1ItemIdentificationKeyCode</a>	
Generalization		GS1Code			
GoodsReceiptReportingCode				Code specifying a type of goods receipt reporting. Allowed code values are specified in GS1 Code List <a href="#">GoodsReceiptReportingCode</a> .	
Generalization		GS1Code			
HandlingInstructionCode				Code specifying a handling instruction. Allowed code values are specified in GS1 Code List <a href="#">HandlingInstructionCode</a> .	
Generalization		GS1Code			
HarmonizedSystemCode				Code specifying a commodity type. Allowed code values are specified by the World Customs Organization (WCO) in their HS Nomenclature.	
Generalization		GS1Code			
IdentityDocumentTypeCode				Code specifying an identity document type. Allowed code values are specified in GS1 Code List <a href="#">IdentityDocumentTypeCode</a> .	
Generalization		GS1Code			
InventoryActivityTypeCode				Code specifying an inventory activity type. Allowed code values are specified in GS1 Code List <a href="#">InventoryActivityTypeCode</a> .	
Generalization		GS1Code			
InventoryMeasurementBasisTypeCode				Code specifying an inventory measurement basis type. Allowed code values are specified in GS1 Code List <a href="#">InventoryMeasurementBasisTypeCode</a> .	
Generalization		GS1Code			
InventoryMovementTypeCode				Code specifying an inventory movement type. Allowed code values are specified in GS1 Code List <a href="#">InventoryMovementTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
InventoryStatusCode				Code specifying an inventory status. Allowed code values are specified in GS1 Code List <a href="#">InventoryStatusCode</a> .	
Generalization		GS1Code			
InventorySubLocationFunctionCode				Code specifying an inventory sub-location function. Allowed code values are specified in GS1 Code List <a href="#">InventorySubLocationFunctionCode</a> .	
Generalization		GS1Code			
InventorySubLocationTypeCode				Code specifying an inventory sub-location type. Allowed code values are specified in GS1 Code List <a href="#">InventorySubLocationTypeCode</a> .	
Generalization		GS1Code			
InvoiceTypeCode				Code specifying an invoice type. Allowed code values are specified in GS1 Code List <a href="#">InvoiceTypeCode</a> .	
Generalization		GS1Code			
ItemScopeTypeCode				Code specifying an item scope type. Allowed code values are specified in GS1 Code List <a href="#">ItemScopeTypeCode</a> .	
Generalization		GS1Code			
ItemTypeCode				Code describing the trade item type. Allowed code values are specified in GS1 Code List <a href="#">ItemTypeCode</a> .	
Generalization		GS1Code			
LegalRegistrationCode				Code specifying a type of legal registration. Allowed code values are specified in GS1 Code List <a href="#">LegalRegistrationCode</a> .	
Generalization		GS1Code			
LineItemActionCode				Code specifying a line item action. Allowed code values are specified in GS1 Code List <a href="#">LineItemActionCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
LocationScopeParameterTypeCode				Code specifying a location scope parameter type. Allowed code values are specified in GS1 Code List <a href="#">LocationParameterScopeTypeCode</a> .	
Generalization		GS1Code			
LocationScopeTypeCode				Code specifying a location scope type. Allowed code values are specified in GS1 Code List <a href="#">LocationScopeTypeCode</a> .	
Generalization		GS1Code			
LogisticEventTypeCode				Code specifying a logistic event type. Allowed code values are specified in GS1 Code List <a href="#">LogisticEventTypeCode</a> .	
Generalization		GS1Code			
LogisticServiceReferenceTypeCode				List of GS1 messages related to logistic services. Allowed code values are specified in GS1 Code List <a href="#">LogisticServiceReferenceTypeCode</a> .	
Generalization		GS1Code			
LogisticServiceRequirementCode				Code specifying a logistic service requirement. Allowed code values are specified in GS1 Code List <a href="#">LogisticServiceRequirementCode</a> .	
Generalization		GS1Code			
MarginSchemeCode				Code specifying a margin scheme. Allowed code values are specified in GS1 Code List <a href="#">MarginSchemeCode</a> .	
Generalization		GS1Code			
MaterialTypeCode				Code specifying a type of material. Allowed code values are specified in GS1 Code List <a href="#">MaterialTypeCode</a> .	
Generalization		GS1Code			
MeasurementTypeCode				Code specifying a type of measurement. Allowed code values are specified in GS1 Code List <a href="#">MeasurementTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
ObservationTypeCode				Code specifying an observation type. Allowed code values are specified in GS1 Code List <a href="#">ObservationTypeCode</a> .	
Generalization		GS1Code			
OrderEntryTypeCode				Code specifying the entry channel of customer orders. Allowed code values are specified in GS1 Code List <a href="#">OrderEntryTypeCode</a>	
Generalization		GS1Code			
OrderInstructionCode				Code specifying an order instruction. Allowed code values are specified in GS1 Code List <a href="#">OrderInstructionCode</a> .	
Generalization		GS1Code			
OrderRelationshipTypeCode				Code specifying relationship between related Purchase Order messages. Allowed code values are specified in GS1 Code List <a href="#">OrderRelationshipTypeCode</a>	
Generalization		GS1Code			
OrderTypeCode				Code specifying an order type. Allowed code values are specified in GS1 Code List <a href="#">OrderTypeCode</a> .	
Generalization		GS1Code			
OutOfStockMeasurementTypeCode				Code specifying an out of stock measurement type. Allowed code values are specified in GS1 Code List <a href="#">OutOfStockMeasurementTypeCode</a> .	
Generalization		GS1Code			
OwnershipTransferConditionCode				Code specifying the condition for transfer of ownership of goods. Allowed code values are specified in GS1 Code List <a href="#">OwnershipTransferConditionCode</a>	
Generalization		GS1Code			
PackageLevelCode				Code specifying a package level. Allowed code values are specified in GS1 Code List <a href="#">PackageLevelCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
PackageTypeCode				Code specifying a package type. Allowed code values are specified in UN/ECE Recommendation 21.	
Generalization		GS1Code			
PackagingConditionCode				Code specifying a packaging quality condition. Allowed code values are specified in GS1 Code List <a href="#">PackagingConditionCode</a> .	
Generalization		GS1Code			
PackagingMarkingTypeCode				Code specifying an packaging marking type. Allowed code values are specified in GS1 Code List <a href="#">PackagingMarkingTypeCode</a> .	
Generalization		GS1Code			
PackagingTermsCode				Code specifying the packaging terms and conditions. Allowed code values are specified in GS1 Code List <a href="#">PackagingTermsCode</a>	
Generalization		GS1Code			
PassengerCategoryCode				Code specifying the role, function or other main characteristic categorizing the type of passenger. Allowed code values are specified in GS1 Code List <a href="#">PassengerCategoryCode</a> .	
Generalization		GS1Code			
PaymentFormatCode				Code specifying a payment format. Allowed code values are specified in GS1 Code List <a href="#">PaymentFormatCode</a> .	
Generalization		GS1Code			
PaymentTermsEventCode				Code specifying a payment terms event. Allowed code values are specified in GS1 Code List <a href="#">PaymentTermsEventCode</a> .	
Generalization		GS1Code			
PerformanceMeasureTypeCode				Code specifying a performance measure type. Allowed code values are specified in GS1 Code List <a href="#">PerformanceMeasureTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
PeriodicityTypeCode				Code specifying a periodicity type. Allowed code values are specified in GS1 Code List <a href="#">PeriodicityTypeCode</a> .	
Generalization		GS1Code			
PlanBucketSizeCode				Code specifying a plan bucket size. Allowed code values are specified in GS1 Code List <a href="#">PlanBucketSizeCode</a> .	
Generalization		GS1Code			
PlanCommitmentLevelCode				Code specifying a plan commitment level. Allowed code values are specified in GS1 Code List <a href="#">PlanCommitmentLevelCode</a> .	
Generalization		GS1Code			
PrintingInstructionCode				Code specifying a printing instruction. Allowed code values are specified in GS1 Code List <a href="#">PrintingInstructionCode</a> .	
Generalization		GS1Code			
ProductionMethodForFishAndSeafoodCode				A code specifying how the fish had been grown / cultivated. Allowed code values are specified in GS1 Code List <a href="#">ProductionMethodForFishAndSeafoodCode</a>	
Generalization		GS1Code			
PurchaseConditionsCommitmentTypeCode				Code specifying a purchase conditions commitment type. Allowed code values are specified in GS1 Code List <a href="#">PurchaseConditionsCommitmentTypeCode</a> .	
Generalization		GS1Code			
QualityControlCode				Code specifying a type of required quality control. Allowed code values are specified in GS1 Code List <a href="#">QualityControlCode</a> .	
Generalization		GS1Code			
QuantitySpecificationTypeCode				Code specifying a quantity type. Allowed code values are specified in GS1 Code List <a href="#">QuantitySpecificationTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
ReceivingConditionCode				Code specifying a receiving condition. Allowed code values are specified in GS1 Code List <a href="#">ReceivingConditionCode</a> .	
Generalization		GS1Code			
ReferenceNumberTypeCode				Code specifying the type of the reference number. Allowed code values are specified in GS1 Code List <a href="#">ReferenceNumberTypeCode</a> .	
Generalization		GS1Code			
RemainingQuantityStatusCode				Code specifying a remaining quantity status. Allowed code values are specified in GS1 Code List <a href="#">RemainingQuantityStatusCode</a> .	
Generalization		GS1Code			
ResponseStatusCode				Code specifying a response status. Allowed code values are specified in GS1 Code List <a href="#">ResponseStatusCode</a> .	
Generalization		GS1Code			
SalesMeasurementTypeCode				Code specifying a sales measurement type code. Allowed code values are specified in GS1 Code List <a href="#">SalesMeasurementTypeCode</a> .	
Generalization		GS1Code			
SealConditionCode				Code specifying a seal condition. Allowed code values are specified in GS1 Code List <a href="#">SealConditionCode</a> .	
Generalization		GS1Code			
SealTypeCode				Code specifying a seal type. Allowed code values are specified in GS1 Code List <a href="#">SealTypeCode</a> .	
Generalization		GS1Code			
ServiceLevelBasisTypeCode				Code specifying a service level basis type. Allowed code values are specified in GS1 Code List <a href="#">ServiceLevelBasisTypeCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
ServiceLevelMeasurementBasisTypeCode				Code specifying a service level measurement basis type. Allowed code values are specified in GS1 Code List <a href="#">ServiceLevelMeasurementBasisTypeCode</a> .	
Generalization		GS1Code			
SettlementHandlingTypeCode				Code specifying a settlement handling type. Allowed code values are specified in GS1 Code List <a href="#">SettlementHandlingTypeCode</a> .	
Generalization		GS1Code			
SettlementTypeCode				Code specifying a settlement type. Allowed code values are specified in GS1 Code List <a href="#">SettlementTypeCode</a> .	
Generalization		GS1Code			
SpecialServiceTypeCode				Code specifying a special service. Allowed code values are specified in GS1 Code List <a href="#">SpecialServiceTypeCode</a> .	
Generalization		GS1Code			
StockRequirementTypeCode				Code specifying a stock requirement type. Allowed code values are specified in GS1 Code List <a href="#">StockRequirementTypeCode</a> .	
Generalization		GS1Code			
StructureTypeCode				Code specifying a structure type. Allowed code values are specified in GS1 Code List <a href="#">StructureTypeCode</a> .	
Generalization		GS1Code			
SymbolComponentCode				Code specifying a symbol component. Allowed code values are specified in GS1 Code List <a href="#">SymbolComponentCode</a> .	
Generalization		GS1Code			
SynchronisationCalculationTypeCode				Code specifying a synchronisation calculation type. Allowed code values are specified in GS1 Code List <a href="#">SynchronisationCalculationTypeCode</a> .	
Generalization		GS1Code			





Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
TimePeriodScopeTypeCode				Code specifying a time period scope type. Allowed code values are specified in GS1 Code List <a href="#">TimePeriodScopeTypeCode</a> .	
Generalization		GS1Code			
TradeItemDataOwnerCode				The code indicating who owns the set of trade item transactional data. Allowed code values are specified in GS1 Code List <a href="#">TradeItemDataOwnerCode</a> .	
Generalization		GS1Code			
TradeItemUnitDescriptorCode				Code specifying a trade item unit. Allowed code values are specified in GS1 Code List <a href="#">TradeItemUnitDescriptorCode</a> .	
Generalization		GS1Code			
TransactionalReferenceTypeCode				Code specifying a transactional reference type. Allowed code values are specified in GS1 Code List <a href="#">TransactionalReferenceTypeCode</a> .	
Generalization		GS1Code			
TransportChargesPaymentMethodCode				Code specifying the payment method for transport charges. Allowed code values are specified in GS1 Code List <a href="#">TransportChargesPaymentMethodCode</a> .	
Generalization		GS1Code			
TransportInstructionStatusReasonCode				Code specifying a transport instruction status reason. Allowed code values are specified in GS1 Code List <a href="#">TransportInstructionStatusReasonCode</a> .	
Generalization		GS1Code			
TransportMeansTypeCode				Code specifying a transport means type. Allowed code values are specified in GS1 Code List <a href="#">TransportMeansTypeCode</a> .	
Generalization		GS1Code			
TransportModeCode				Code specifying a transport mode. Allowed code values are specified in GS1 Code List <a href="#">TransportModeCode</a> .	




Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
Generalization		GS1Code			
TransportPartyRoleCode				Code specifying a transport party role. Allowed code values are specified in GS1 Code List <a href="#">TransportPartyRoleCode</a> .	
Generalization		GS1Code			
TransportPaymentMethodCode				Code specifying a transport payment method. Allowed code values are specified in GS1 Code List <a href="#">TransportPaymentMethodCode</a> .	
Generalization		GS1Code			
TransportReferenceTypeCode				Code specifying a transport reference type. Allowed code values are specified in GS1 Code List <a href="#">TransportReferenceTypeCode</a> .	
Generalization		GS1Code			
TransportServiceCategoryCode				Code specifying a transport service category. Allowed code values are specified in GS1 Code List <a href="#">TransportServiceCategoryCode</a> .	
Generalization		GS1Code			
TransportServiceConditionTypeCode				Code specifying a transport service condition. Allowed code values are specified in GS1 Code List <a href="#">TransportServiceConditionCode</a> .	
Generalization		GS1Code			
TransportServiceLevelCode				Code specifying a transport service level. Allowed code values are specified in GS1 Code List <a href="#">TransportServiceLevelCode</a> .	
Generalization		GS1Code			
TransportStatusConditionCode				Code specifying a transport status condition. Allowed code values are specified in GS1 Code List <a href="#">TransportStatusConditionCode</a> .	
Generalization		GS1Code			
TransportStatusReasonCode				Code specifying a transport status reason. Allowed code values are specified in GS1 Code List <a href="#">TransportStatusReasonCode</a> .	
Generalization		GS1Code			



Content	Attribute / Role	Datatype / Secondaryclass	Multiplicity	Definition	Requirements
UNLocationCode				Code specifying a location used in trade or transport. Allowed code values are specified in the United Nations Code for Trade and Transport Locations (UN/LOCODE).	
Generalization		GS1Code			
VarianceReasonCode				Code specifying a variance reason. Allowed code values are specified in GS1 Code List <a href="#">VarianceReasonCode</a> .	
Generalization		GS1Code			
WarehouseABCClassificationCode				Code specifying a Warehouse Classification category. Allowed code values are specified in GS1 Code List <a href="#">WarehouseABCClassificationCode</a> .	
Generalization		GS1Code			

### 4.1.3 Enumerations

#### Class Diagram

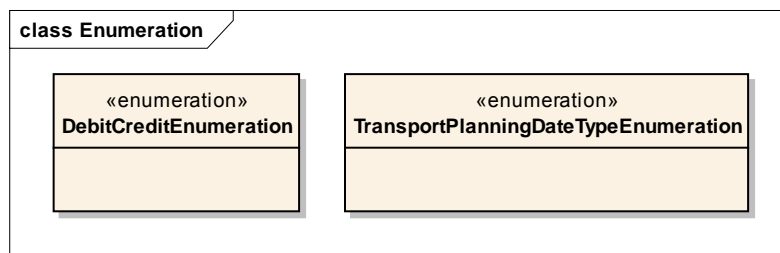




## 4.2 Components

### 4.2.1 eCom GS1 Identification

#### Class Diagram

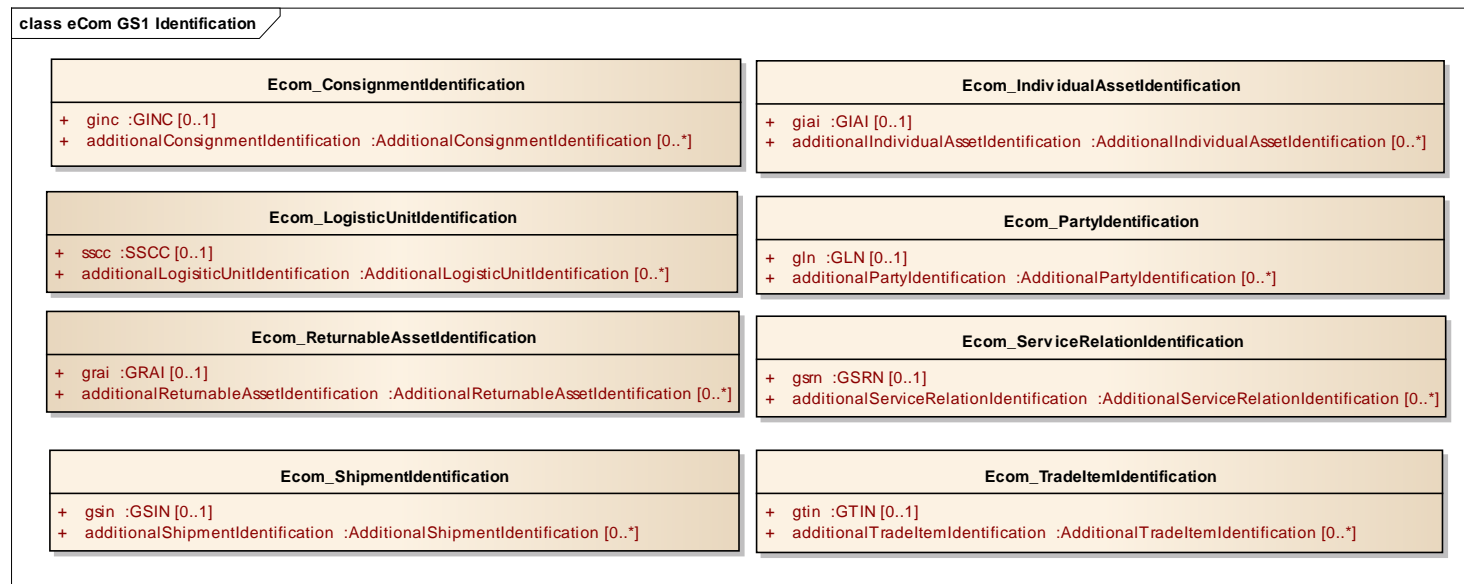

#### GDD Report

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
<b>Ecom_ConsignmentIdentification</b>				Information used to identify a consignment.	
Attribute	ginc	GINC	0..1	Global Identification Number for Consignment (GINC), the GS1 key used for the identification of consignments.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	additionalConsignmentIdentification	AdditionalConsignmentIdentification	0..*	Additional identification key used to identify a consignment.	
<b>Ecom_EntityIdentification</b>					
Association	contentOwner	Ecom_PartyIdentification	0..1	Uniquely identifies the creator of the instance document.	
Attribute	entityIdentification	string	1..1	The unique identifier of the piece of information, such as the object identifier or the document identifier.	
<b>Ecom_IndividualAssetIdentification</b>				Information used to identify an asset.	
Attribute	giai	GIAI	0..1	Global Individual Asset Identifier (GIAI), the GS1 key used for the identification of individual assets.	
Attribute	additionalIndividualAssetIdentification	AdditionalIndividualAssetIdentification	0..*	Identifier of the asset, specified in addition to the GIAI.	
<b>Ecom_LogisticUnitIdentification</b>				The globally unique identification attached to a shipping container or shipping package and used for logistical and traceability purposes.	
Attribute	sscc	SSCC	0..1	Serial Shipping Container Code (SSCC), the GS1 key used for the identification of logistic units.	
Attribute	additionalLogisticUnitIdentification	AdditionalLogisticUnitIdentification	0..*	Additional (non-SSCC) identification attached to a shipping container or shipping package and used for logistical and traceability purposes.	
<b>Ecom_PartyIdentification</b>					




Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	gln	GLN	0..1	Global Location Number (GLN), the GS1 key used for the identification of parties and locations.	
Attribute	additionalPartyIdentification	AdditionalPartyIdentification	0..*	Identifier of the party or location, specified in addition to the GLN.	
<b>Ecom_ReturnableAssetIdentification</b>				Information used to identify a returnable asset.	
Attribute	grai	GRAI	0..1	Global Returnable Asset Identifier (GRAI), the GS1 key used for the identification of returnable assets.	
Attribute	additionalReturnableAssetIdentification	AdditionalReturnableAssetIdentification	0..*	The additional identification Key used to identify returnable assets.	
<b>Ecom_ServiceRelationIdentification</b>				Information used to identify a service relation.	
Attribute	gsrn	GSRN	0..1	Global Service Relation Number (GSRN), the GS1 key used for the identification of relationships between service providers and service recipients.	
Attribute	additionalServiceRelationIdentification	AdditionalServiceRelationIdentification	0..*	The additional key used to identify the relationship between a service provider and service recipient.	
<b>Ecom_ShipmentIdentification</b>				Information used to identify a shipment.	
Attribute	gsin	GSIN	0..1	Global Shipment Identification Number (GSIN), the GS1 key used for the identification of shipments.	
Attribute	additionalShipmentIdentification	AdditionalShipmentIdentification	0..*	Additional identification key used to identify a shipment.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
<b>Ecom_TradeItemIdentification</b>					
Attribute	gtin	GTIN	0..1	Global Trade Item Number (GTIN), the GS1 key used for the identification of trade items.	
Attribute	additionalTradeItemIdentification	AdditionalTradeItemIdentification	0..*	Alternative means to the Global Trade Item Number to identify a trade item.	

#### 4.2.2 Administrative Unit

##### Class Diagram

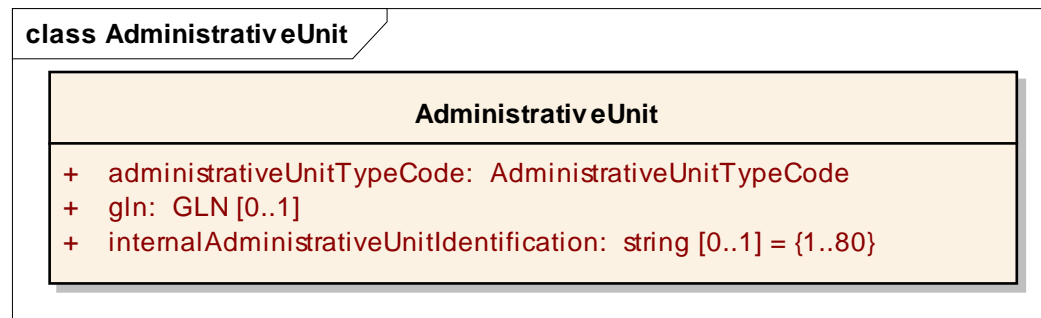

##### GDD Report


The content of the: AdministrativeUnit class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:AdministrativeUnit](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:AdministrativeUnit)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
AdministrativeUnit				An organizational grouping used for internal planning, control and accounting purposes.	
Attribute	administrativeUnitTypeCode	AdministrativeUnitTypeCode	1..1	Code specifying the type of this administrative unit.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	gln	GLN	0..1	The Global Location Number (GLN) identifying this administrative unit.	
Attribute	internalAdministrativeUnitIdentification	string	0..1	Internal identifier of this administrative unit.	

### 4.2.3 Allowance Charge

#### Class Diagram

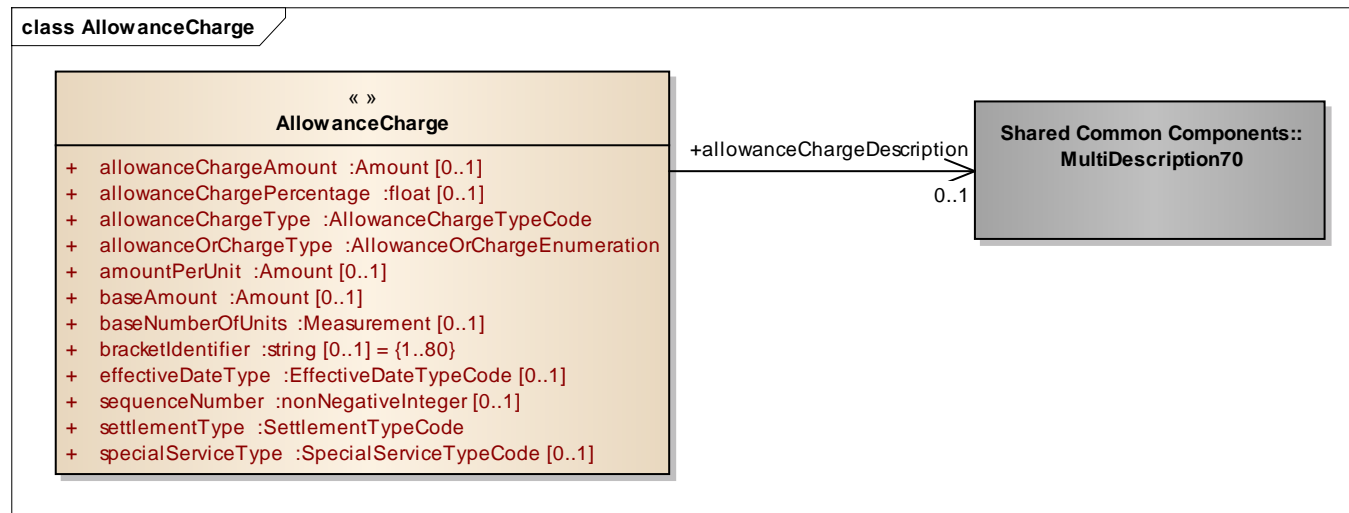

#### GDD Report


The content of the: AllowanceCharge class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:AllowanceCharge](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:AllowanceCharge)



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
AllowanceCharge				Specifies allowances and charges specified to either the entire message or to individual line items contained in the message.	
Association	allowanceChargeDescription	MultiDescription70	0..1	A text explanation of the allowance or charge.	
Attribute	allowanceChargeAmount	Amount	0..1	Amount of allowance or charge applicable.	
Attribute	allowanceChargePercentage	float	0..1	Allowance and charges can be expressed in different ways. By using percentage, they are expressed as a percentage of another amount, e.g. the base amount.	
Attribute	allowanceChargeType	AllowanceChargeTypeCode	1..1	The identification of an allowance charge selected from a predefined list.	
Attribute	allowanceOrChargeType	AllowanceOrChargeEnumeration	1..1	Code specifying whether this is an allowance or a charge.	
Attribute	amountPerUnit	Amount	0..1	Allowance/charge per unit expressed as an amount.	
Attribute	baseAmount	Amount	0..1	The amount on which the calculation of the allowance or charge is based.	
Attribute	baseNumberOfUnits	Measurement	0..1	Number of units on which the allowance or charge is based.	
Attribute	bracketIdentifier	string	0..1	Identification of the conditions that apply to the allowance or charge.	
Attribute	effectiveDateType	EffectiveDateTypeCode	0..1	Code specifying the type of date that effectuates the allowance or charge.	
Attribute	sequenceNumber	nonNegativeInteger	0..1	A number used to indicate the order in which the allowances or charges are to be calculated.	
Attribute	settlementType	SettlementTypeCode	1..1	Code specifying the type of settlement for the allowance or charge.	
Attribute	specialServiceType	SpecialServiceTypeCode	0..1	Code specifying a special service	

## 4.2.4 Carrier Pick Up Drop Off Details

### Class Diagram

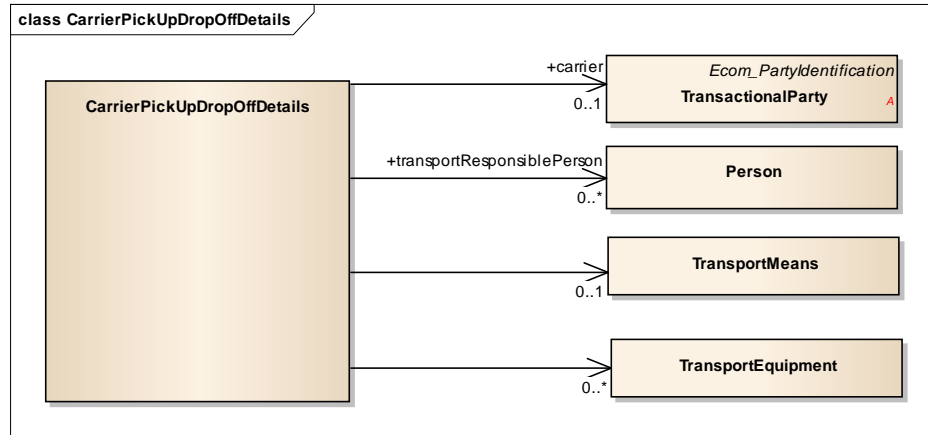


### GDD Report

The content of the: CarrierPickUpDropOffDetails class, its structure and component definitions can be accessed in the Global Data Dictionary: [http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CarrierPickUpDropOffDetails](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CarrierPickUpDropOffDetails)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
CarrierPickUpDropOffDetails				Information on the logistic service provider, the personnel, and the transport means and equipment that will be used to collect or deliver goods.	
Association	carrier	TransactionalParty	0..1	The party that will collect, transport and deliver the goods.	
Association		TransportMeans	0..1	Details on the transport means used for the transport.	
Association		TransportEquipment	0..*	Details on the transport equipment used for the transport.	
Association	transportResponsiblePerson	Person	0..*	The person responsible for the execution of this pick-up or drop-off, for example the driver.	

## 4.2.5 Carrier Track And Trace Information

### Class Diagram

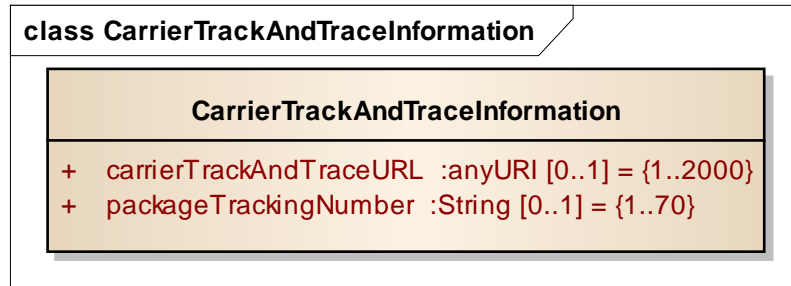

### GDD Report

The content of the: CarrierTrackAndTraceInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CarrierTrackAndTraceInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CarrierTrackAndTraceInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
CarrierTrackAndTraceInformation				Tracking and tracing information about the package, provided by the carrier.	
Attribute	carrierTrackAndTraceURL	anyURI	0..1	A URL where the carrier provides the tracking and tracing information about the package	
Attribute	packageTrackingNumber	String	0..1	A unique package tracking number assigned by the carrier	

## 4.2.6 Child Package Level

### Class Diagram




### GDD Report

The content of the: ChildPackageLevel class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ChildPackageLevel](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ChildPackageLevel)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ChildPackageLevel				Information about the hierarchical level and quantity of packaging.	
Attribute	packageLevelCode	PackageLevelCode	1..1	Code specifying the hierarchical level of packaging	
Attribute	childPackageLevelQuantity	nonNegativeInteger	1..1	The number of unique trade items of the level specified in the package level code contained in this trade item	

## 4.2.7 Collaborative Trade Item

### Class Diagram

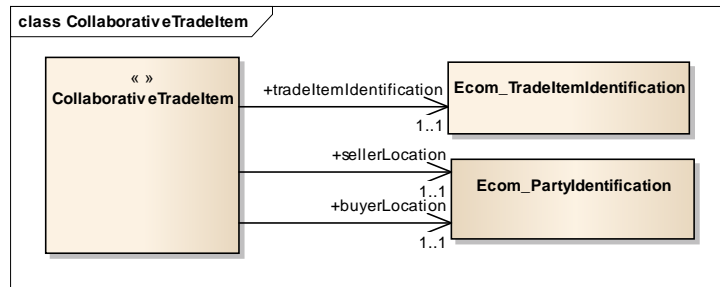

### GDD Report


The content of the: CollaborativeTradeItem class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CollaborativeTradeItem](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:CollaborativeTradeItem)

Content	Attribute / Role	Datatype / Secondary class	Multiplicity	Definition	Requirements
CollaborativeTradeItem				Collaborative Trade Item identifies the product with the buyer and seller locations.	
Association	tradeItemIdentification	Ecom_TradeItemIdentification	1..1	Provides the GTIN as the unique identifier for the item and optionally additional formats of non GTIN identifiers for the item.	
Association	buyerLocation	Ecom_PartyIdentification	1..1	The identification of the buyer location for this collaborative trade item.	
Association	sellerLocation	Ecom_PartyIdentification	1..1	The identification of the seller location for this collaborative trade item.	

## 4.2.8 Consignment Reference

### Class Diagram

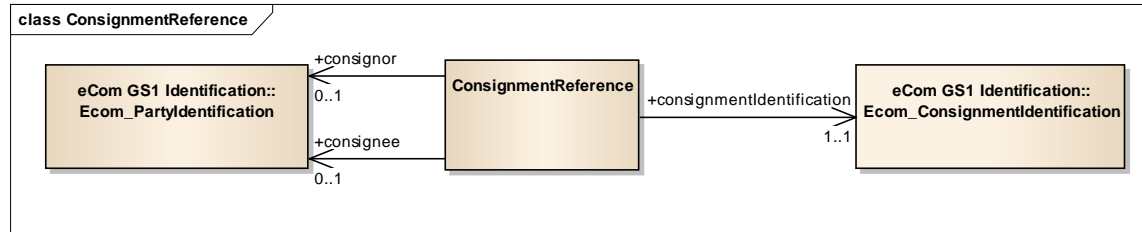


### GDD Report

The content of the: ConsignmentReference class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ConsignmentReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ConsignmentReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ConsignmentReference				Reference to consignment information	
Association	consignmentIdentification	Ecom_ConsignmenIdentification	1..1	Information used to identify a consignment	
Association	consignor	Ecom_PartyIdentification	0..1	The party despatching a consignment of goods	
Association	consignee	Ecom_PartyIdentification	0..1	The party receiving a consignment of goods	

## 4.2.9 Dangerous Goods Attribute

### Class Diagram

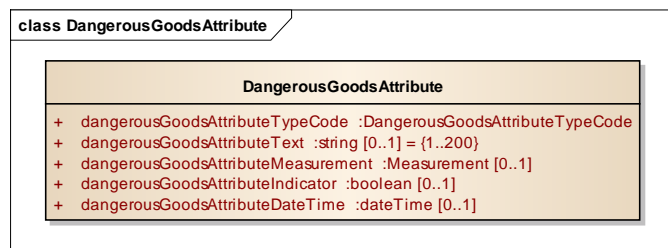

## GDD Report


The content of the: DangerousGoodsAttribute class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DangerousGoodsAttribute](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DangerousGoodsAttribute)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DangerousGoodsAttribute				Hazardous instructions attribute details specific to a particular dangerous goods regulation.	
Attribute	dangerousGoodsAttributeTypeCode	DangerousGoodsAttributeTypeCode	1..1	Code specifying the type of dangerous goods attribute.	
Attribute	dangerousGoodsAttributeText	string	0..1	Textual value of the dangerous goods attribute.	
Attribute	dangerousGoodsAttributeMeasurement	Measurement	0..1	Measurement value of the dangerous goods attribute.	
Attribute	dangerousGoodsAttributeIndicator	boolean	0..1	Boolean value of the dangerous goods attribute.	
Attribute	dangerousGoodsAttributeDateTime	dateTime	0..1	Date time value of the dangerous goods attribute.	

## 4.2.10 Dangerous Goods Information

### Class Diagram

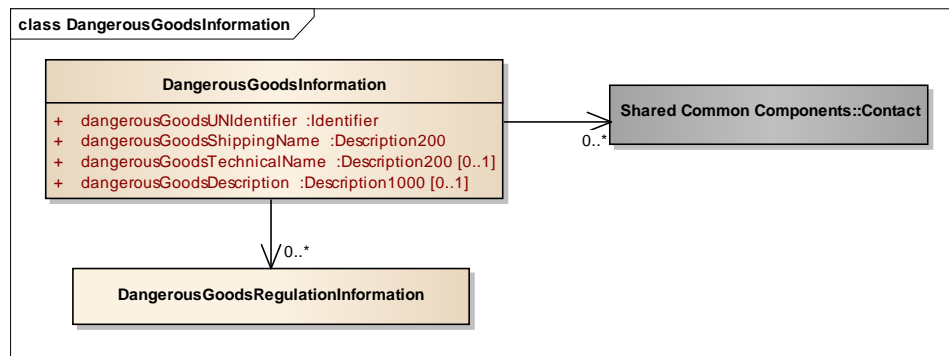


## GDD Report

The content of the: DangerousGoodsInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DangerousGoodsInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DangerousGoodsInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DangerousGoodsInformation				Hazardous instructions applicable to delivered goods, such as where or how specified packages or containers are to be handled because of restriction from dangerous goods.	
Association		DangerousGoodsRegulationInformation	0..*	Hazardous instructions applicable to delivered goods according to a particular dangerous goods regulation.	
Association		Contact	0..*	A contact in relation to the handling of hazardous materials.	
Attribute	dangerousGoodsUNIdentifier	Identifier	1..1	Number to identify hazardous substances or articles, as defined by United Nations Committee of Experts on the Transport of Dangerous Goods.	
Attribute	dangerousGoodsShippingName	Description200	1..1	Shipping name of the trade item (dangerous goods). Regulations provide a list of all acceptable proper shipping names.	
Attribute	dangerousGoodsTechnicalName	Description200	0..1	A technical name provided for a hazardous good by an organisation or regulation.	
Attribute	dangerousGoodsDescription	Description1000	0..1	Description of the hazardous materials.	

### 4.2.11 Dangerous Goods Regulation Information

#### Class Diagram

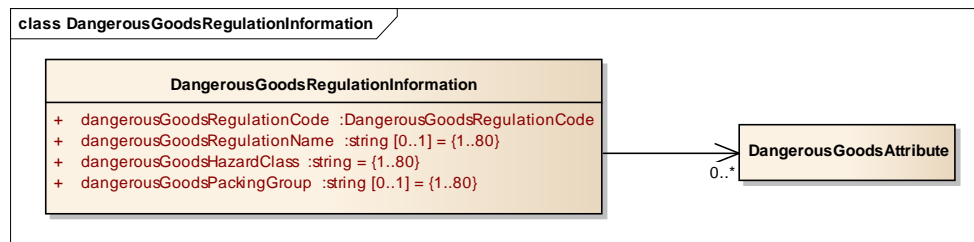



## GDD Report


The content of the: DangerousGoodsRegulationInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie: DangerousGoodsRegulationInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie: DangerousGoodsRegulationInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DangerousGoodsRegulationInformation				Hazardous instructions applicable to delivered goods according to a particular dangerous goods regulation.	
Association		DangerousGoodsAttribute	0..*	Hazardous instructions attribute details specific to a particular dangerous goods regulation.	
Attribute	dangerousGoodsRegulationCode	DangerousGoodsRegulationCode	1..1	An indication of the classification system(s) of dangerous goods and/or the Agency(ies) responsible for it.	
Attribute	dangerousGoodsRegulationName	string	0..1	Information specific to variable weight or dimension trade items.	
Attribute	dangerousGoodsHazardClasses	string	1..1	The name of the class within the classification of hazardous materials for example Class A.	
Attribute	dangerousGoodsPackingGroup	string	0..1	Identifies the degree of risk these dangerous goods present during transport according to the specified regulation.	

## 4.2.12 Deliver Date Information

### Class Diagram

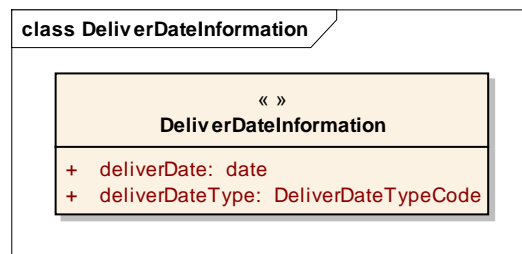

## GDD Report


The content of the: DeliverDateInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DeliverDateInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DeliverDateInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DeliverDateInformation				Provides the date information for the shipment.	
Attribute	deliverDate	date	1..1	The date on which the shipment is delivered.	
Attribute	deliverDateType	DeliverDateTypeCode	1..1	A code identifying the type of date on which goods or services will or have been delivered.	

## 4.2.13 Delivery Terms

### Class Diagram

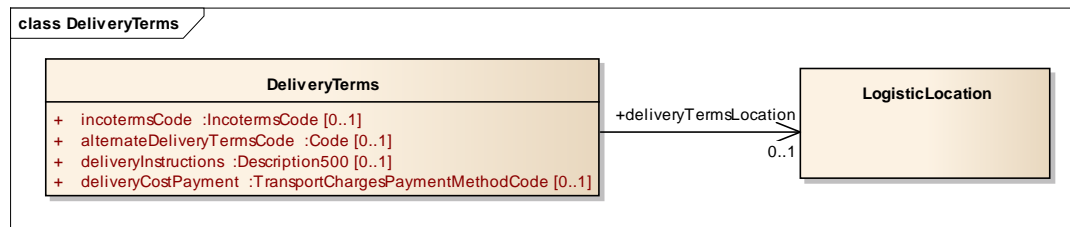

## GDD Report

The content of the: DeliveryTerms class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DeliveryTerms](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DeliveryTerms)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DeliveryTerms				The applicable legal, customs, financial and insurance terms that have been agreed for a goods delivery.	
Association	deliveryTermsLocation	LogisticLocation	0..1	Location that is applicable to these delivery terms, such as the Free On Board (FOB) destination location.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	incotermsCode	IncotermsCode	0..1	Code specifying the incoterms. Incoterms is an abbreviation for International Commercial Terms. The International Chamber of Commerce manages the Incoterms codes and their definitions.	
Attribute	alternateDeliveryTermsCode	Code	0..1	Code specifying the delivery terms according to a system other than the Incoterms.	
Attribute	deliveryCostPayment	TransportChargesPaymentMethodCode	0..1	Specifies who will pay transport cost.	
Attribute	deliveryInstructions	Description500	0..1	Instructions on the final delivery of the goods.	

#### 4.2.14 Despatch Information

##### Class Diagram

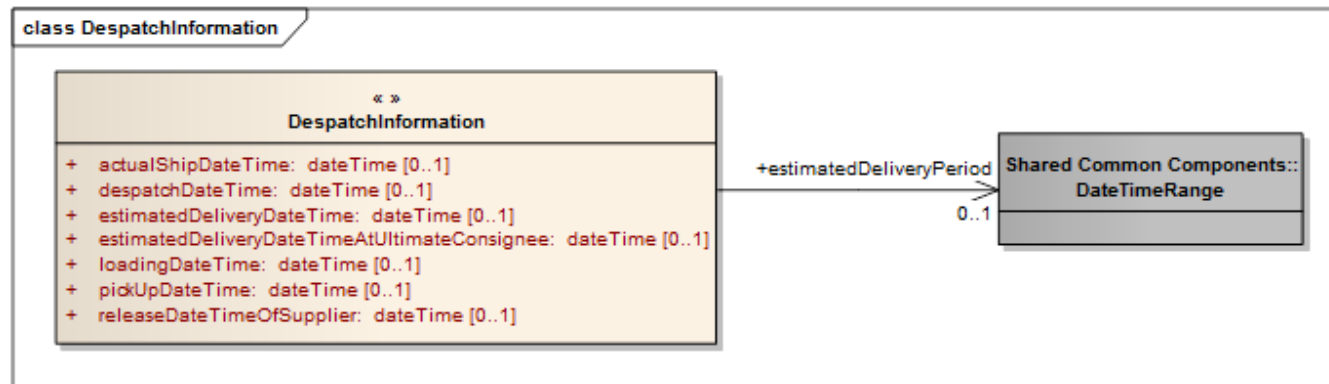

##### GDD Report

The content of the: DespatchInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DespatchInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DespatchInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DespatchInformation				Information with regards to the despatching or shipping of goods.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association	estimatedDeliveryPeriod	DateTimeRange	0..1	Date time range in which the goods are expected to be delivered.	
Attribute	actualShipDateTime	dateTime	0..1	The date and time the goods were shipped.	
Attribute	despatchDateTime	dateTime	0..1	Date/time on which the goods are or are expected to be despatched or shipped.	
Attribute	estimatedDeliveryDateTim e	dateTime	0..1	The estimated date and time of delivery.	
Attribute	estimatedDeliveryDateTim eAtUltimateConsignee	dateTime	0..1	The estimated date and time of delivery at the ultimate consignee	
Attribute	loadingDateTime	dateTime	0..1	The date and time when the goods are loaded for transport.	
Attribute	pickUpDateTime	dateTime	0..1	Date/time at which the cargo is picked up.	
Attribute	releaseDateTimeOfSupplier	dateTime	0..1	Date/Time when the supplier released the goods.	

## 4.2.15 Digital Signature

### Class Diagram

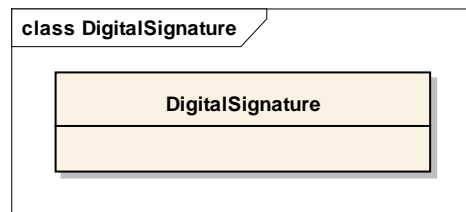

### GDD Report


The content of the: DigitalSignature class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DigitalSignature](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DigitalSignature)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DigitalSignature				Encrypted data used to electronically sign a document.	

## 4.2.16 Duty Fee Tax Registration

### Class Diagram

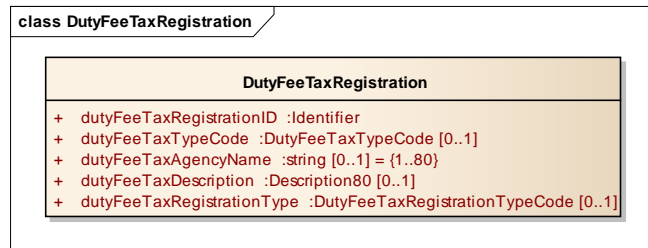

### GDD Report


The content of the: DutyFeeTaxRegistration class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DutyFeeTaxRegistration](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:DutyFeeTaxRegistration)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
DutyFeeTaxRegistration				The party registration details for a particular duty, tax or fee.	
Attribute	dutyFeeTaxRegistrationID	Identifier	1..1	Identifier of the party for this particular duty, fee or tax.	
Attribute	dutyFeeTaxTypeCode	DutyFeeTaxTypeCode	1..1	Code specifying the type of duty, fee or tax.	WR 16-000035
Attribute	dutyFeeTaxAgencyName	string	0..1	Agency responsible for the collection of this duty, fee or tax.	
Attribute	dutyFeeTaxDescription	Description80	0..1	Textual description of this duty, fee or tax.	
Attribute	dutyFeeTaxRegistrationType	DutyFeeTaxRegistrationTypeCode	0..1	Specifies type of tax registration number assigned by national fiscal authorities. Allowed values come from DutyFeeTaxRegistrationTypeCode list.	WR 16-000035

## 4.2.17 Ecom Document

### Class Diagram

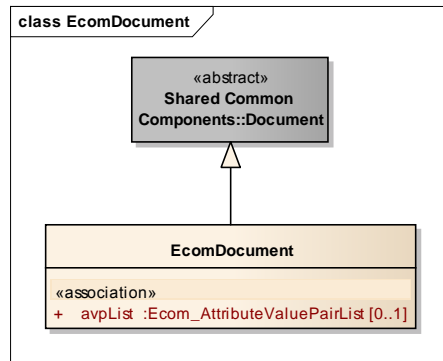

### GDD Report

The content of the: EcomDocument class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:EcomDocument](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:EcomDocument)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
EcomDocument				Used to specify basic information about the content of the message including version number, creation date and time and AVP placeholder.	
Generalisation		Document			
Association	avpList	Ecom_AttributeValuePairList	0..1	The transmission of non-standard data done in a simple, flexible, and easy to use method.	WR 14-000110

## 4.2.18 Ecom\_Attribute Value Pair List

### Class Diagram



### GDD Report


The content of the: Ecom\_AttributeValuePairList class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:Ecom\\_AttributeValuePairList](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:Ecom_AttributeValuePairList)

Content	Attribute/Role	Datatype/Secondaryclass	Multiplicity	Definition	Requirements
Ecom_AttributeValuePairList				The placeholder for non-standard data.	WR 14-000110
Attribute	EcomStringAttributeValuePairList	EcomStringAttributeValuePairList	0..*	An attribute value pair that allows for a string and optionally an associated qualifier (e.g. Unit of Measure).	

## 4.2.19 Ecom String Attribute Value Pair List

### Class Diagram

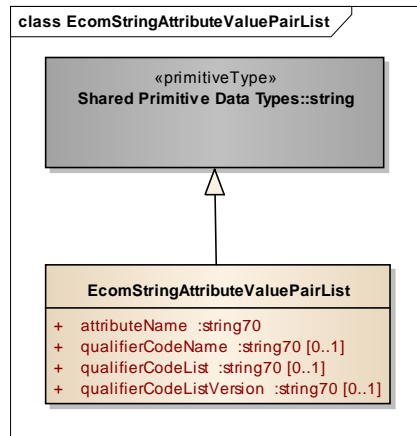

### GDD Report

The content of the: EcomStringAttributeValuePairList class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EcomStringAttributeValuePairList](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EcomStringAttributeValuePairList)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
EcomStringAttribut eValuePairList					
Generalization		string			
Attribute	attributeName	string70	1..1	The name of the temporary attribute being introduced as an attribute value pair.	
Attribute	qualifierCodeName	string70	0..1	The value of the attribute qualifier associated with the codeListName	
Attribute	qualifierCodeList	string70	0..1	The code list qualifying the temporary attribute	
Attribute	qualifierCodeListVersion	string70	0..1	The version of the code list qualifying the temporary attribute.	



## 4.2.20 Ecom\_DocumentReference

### Class Diagram

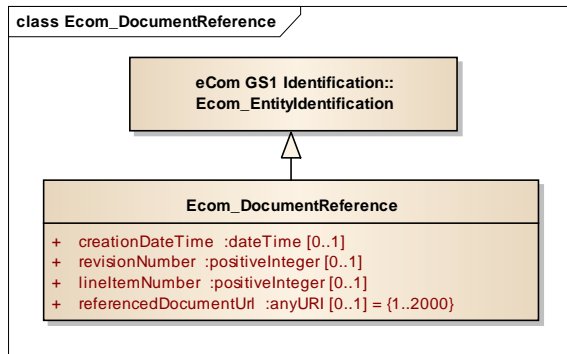

### GDD Report

The content of the: Ecom\_DocumentReference class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:Ecom\\_DocumentReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:Ecom_DocumentReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Ecom_DocumentReference				Information identifying a document and potentially a line within the document for referencing purposes.	
Generalization	Ecom_EntityIdentification				
Attribute	creationDateTime	dateTime	0..1	Date and time of creation of the referenced document.	
Attribute	revisionNumber	positiveInteger	0..1	Number to be used for identification and referencing of subsequent updates to a business document.	
Attribute	lineItemNumber	positiveInteger	0..1	Number specifying a line in the referenced document.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	referencedDocumentUrl	anyURI	0..1	An URI pointing to the on-line location where the referenced document is stored.	

## 4.2.21 End Customer Related Details

### Class Diagram

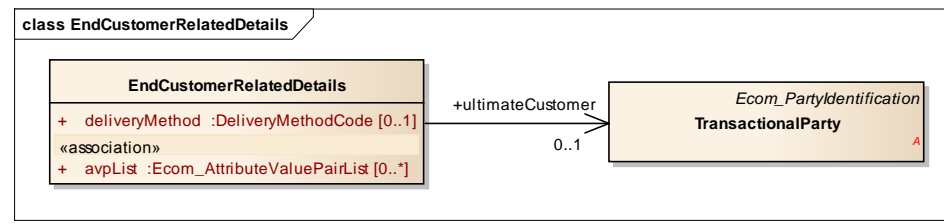

### GDD Report

The content of the: EndCustomerRelatedDetails class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EndCustomerRelatedDetails](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EndCustomerRelatedDetails)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
EndCustomerRelatedDetails				Specifies detailed information related to ultimate customer, e.g. identification, delivery method, etc.	
Association	ultimateCustomer	TransactionalParty	0..1	Allows to specify the final customer that may be different from Ultimate Consignee. E.g. in B2C scenarios, Ultimate Customer may pick up the shipment that had been delivered to the Ultimate Consignee.	
Attribute	deliveryMethod	DeliveryMethodCode	0..1	Specifies method of delivery.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	avpList	Ecom_AttributeValuePairList	0..*	The placeholder for non-standard data.	

## 4.2.22 Energy Quantity Calculation Conditions

### Class Diagram

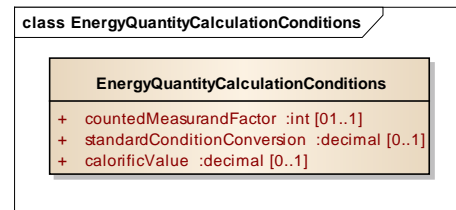

### GDD Report


The content of the: EnergyQuantityCalculationConditions class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EnergyQuantityCalculationConditions](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:EnergyQuantityCalculationConditions)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
EnergyQuantityCalculationConditions				Specifies additional information for price calculation of energy products, e.g. gas, fuel.	
Attribute	countedMeasurandFactor	int	01..1	Factor for price calculation.	
Attribute	standardConditionConversion	decimal	0..1	The ratio of a product volume (e.g. gas) in standard conditions to the volume in the operating state.	
Attribute	calorificValue	decimal	0..1	The calorific value of a fuel indicates the amount of heat generated by the combustion and subsequent cooling of the combustion gases at 25 degrees Celsius.	

## 4.2.23 Financial Institution Information

### Class Diagram

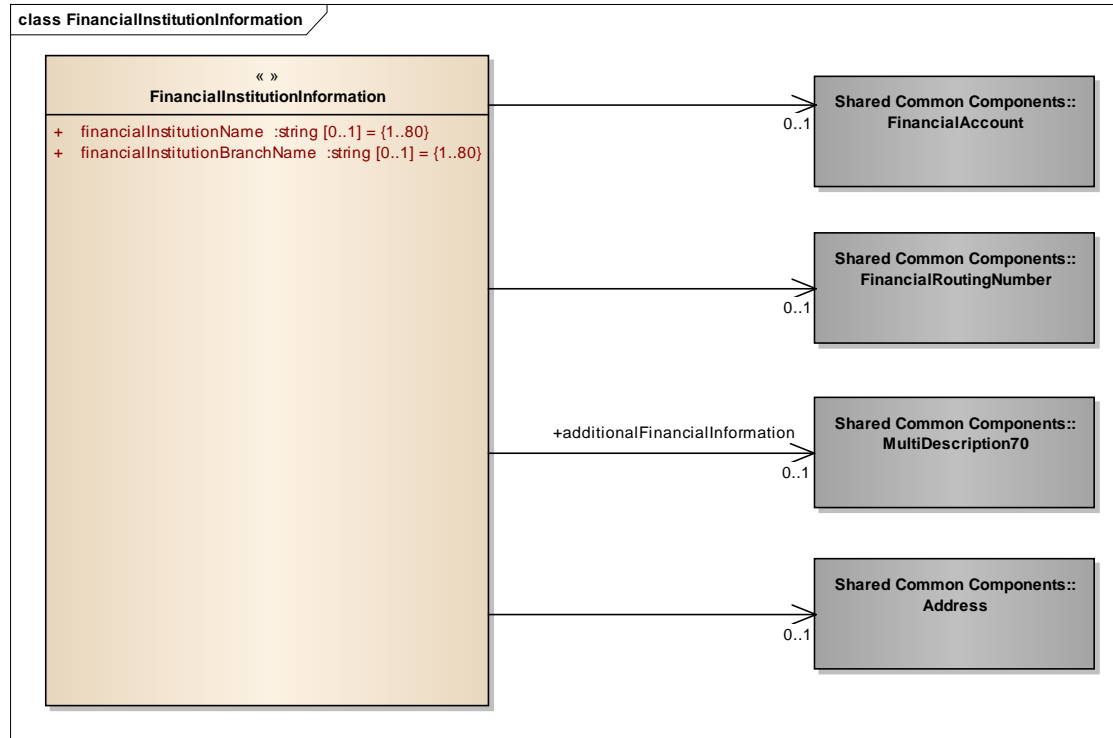

### GDD Report

The content of the: FinancialInstitutionInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:FinancialInstitutionInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:FinancialInstitutionInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
FinancialInstitutionInformation				Information on a financial account and related financial institution.	
Association	additionalFinancialInformation	MultiDescription70	0..1	A description used to provide any additional information about a financial institution.	
Association		FinancialRoutingNumber	0..1	Provides the Routing Number for the Financial Institution.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association		FinancialAccount	0..1	Information identifying a client's financial account with a financial institution.	
Association		Address	0..1	The company name and address of a financial institution.	
Attribute	financialInstitutionName	string	0..1	The name of the account holder's financial institution.	
Attribute	financialInstitutionBranchName	string	0..1	The name of a division or location of the account holder's financial institution.	

## 4.2.24 Handling Instruction

### Class Diagram

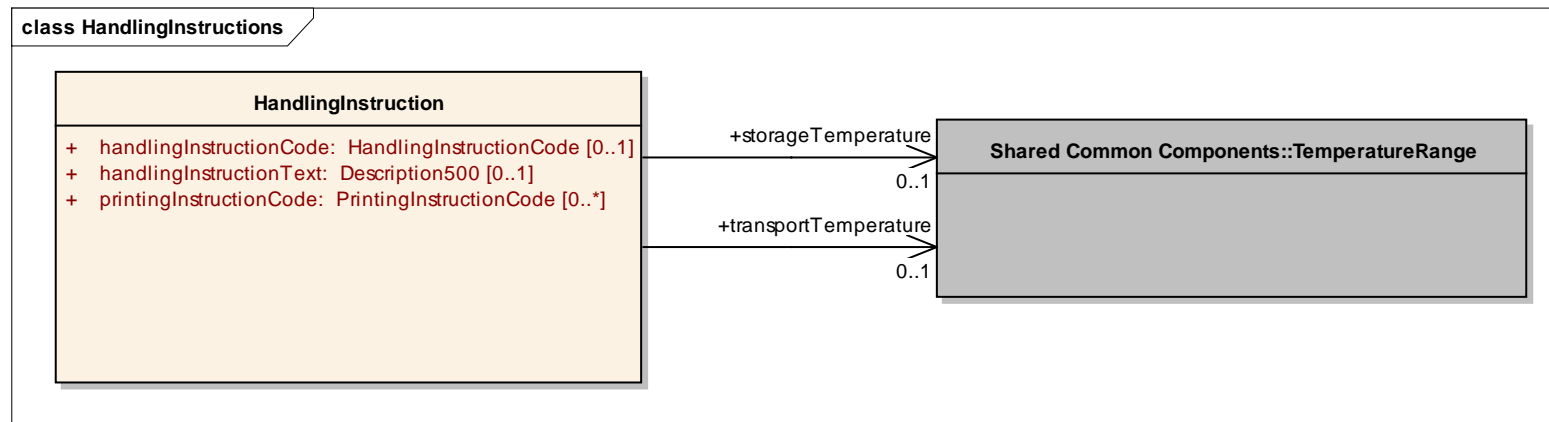

### GDD Report

The content of the: HandlingInstruction class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:HandlingInstruction](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:HandlingInstruction)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
HandlingInstruction				Instruction on the way to treat goods during transport and storage.	
Association	transportTemperature	TemperatureRange	0..1	The minimum and maximum temperature applicable to the transportation of goods.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association	storageTemperature	TemperatureRange	0..1	The minimum and maximum temperature applicable to the storage of goods.	
Attribute	handlingInstructionCode	HandlingInstructionCode	0..1	Code specifying an instruction applicable to the transport or storage of goods.	
Attribute	handlingInstructionText	Description500	0..1	Free text instruction applicable to the transport or storage of goods.	
Attribute	printingInstructionCode	PrintingInstructionCode	0..*	Code specifying the document on which the specified information needs to be printed.	

## 4.2.25 Identity Document

### Class Diagram

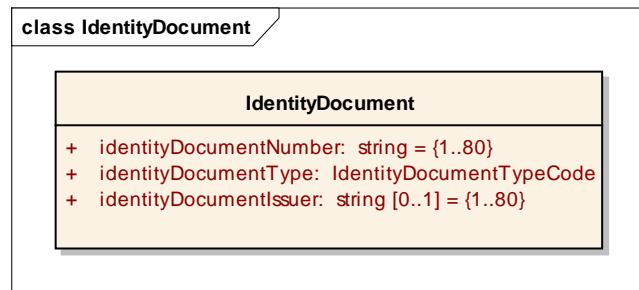

### GDD Report

The content of the: IdentityDocument class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:IdentityDocument](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:IdentityDocument)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
IdentityDocument				An identity document is any document which may be used to verify aspects of a person's personal identity or of a person's relationship with an organisation. If issued in the form of a small, mostly standard-sized card, it is usually called an identity card (IC).	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	identityDocumentNumber	string	1..1	Unique identifier in this identity document, intended to identify a particular person.	
Attribute	identityDocumentType	IdentityDocumentTypeCode	1..1	Code specifying the type of identity document.	
Attribute	identityDocumentIssuer	string	0..1	Text specifying the issuer of the identity document.	

## 4.2.26 Incident Circumstances

### Class Diagram

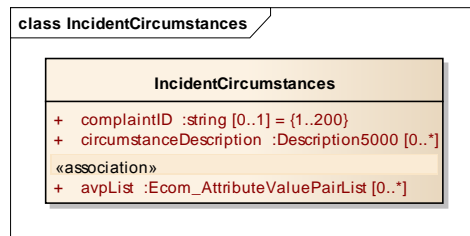

### GDD Report


The content of the: IncidentCircumstances class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:IncidentCircumstances](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:IncidentCircumstances)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
IncidentCircumstances				The circumstances of the cash related incident.	
Attribute	complaintID	string	0..1	Identification of complaint in case of assault.	
Attribute	circumstanceDescription	Description5000	0..*	The description of incident circumstances.	
Attribute	avpList	Ecm_AttributeValuePairList	0..*	The placeholder for non-standard data.	

## 4.2.27 Incident Details

### Class Diagram

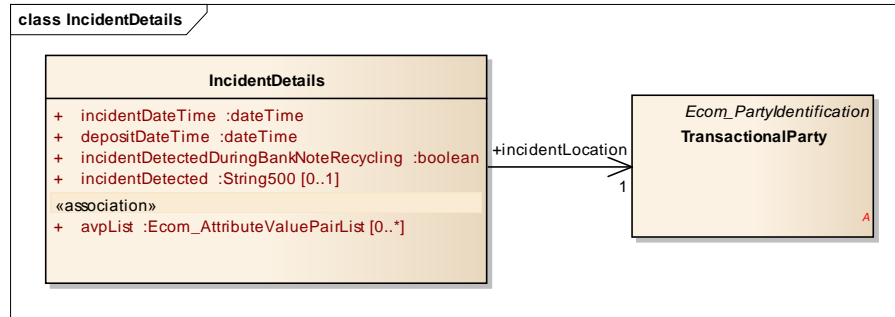

### GDD Report

The content of the: IncidentDetails class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:IncidentDetails](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:IncidentDetails)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
IncidentDetails				Information about the location and date of the cash related incident.	
Association	incidentLocation	TransactionalParty	1	Location where the cash related incident was detected.	
Attribute	incidentDateTime	dateTime	1..1	The date and time of the cash related incident detection.	
Attribute	depositDateTime	dateTime	1..1	Date and time when the customer made deposit at the bank branch.	
Attribute	incidentDetectedDuringBankNoteRecycling	boolean	1..1	Specifies whether the incident was detected during the bank note recycling.	
Attribute	avpList	Ecom_AttributeValuePairList	0..*	The placeholder for non-standard data.	



## 4.2.28 Ink Stain Details

### Class Diagram

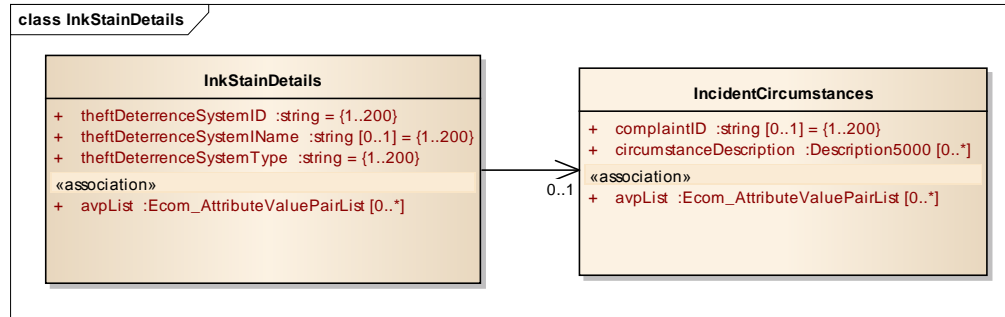

### GDD Report


The content of the: InkStainDetails class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:InkStainDetails](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:InkStainDetails)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InkStainDetails				Specifies detailed circumstances of ink-staining the suspicious bank notes.	
Association		IncidentCircumstances	0..1	The circumstances of the cash related incident.	
Attribute	theftDeterrenceSystemID	string	1..1	Identification of the theft deterring system.	
Attribute	theftDeterrenceSystemName	string	0..1	Name of the theft deterring system.	
Attribute	theftDeterrenceSystemType	string	1..1	Type of the theft deterring system.	
Attribute	avpList	Ecom_AttributeValuePairList	0..*	The placeholder for non-standard data.	

## 4.2.29 Installment Due

### Class Diagram

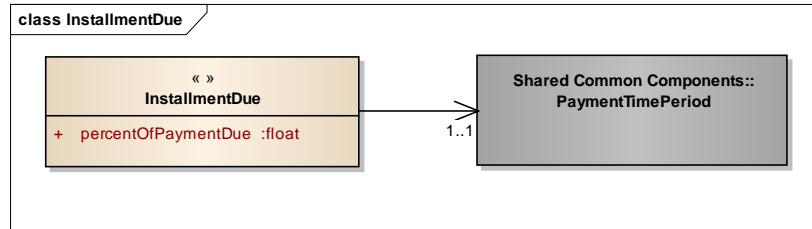

### GDD Report


The content of the: InstallmentDue class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:InstallmentDue](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:InstallmentDue)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InstallmentDue				Specifies the percentage amount of the payment due for a Payment Time Period.	
Association		PaymentTimePeriod	1..1	Provides the payment time period information for the installment.	
Attribute	percentOfPaymentDue	float	1..1	Specifies the exact amount of the payment due this payment period. The amount is expressed as a percent.	

## 4.2.30 Inventory Duty Fee Tax Status

### Class Diagram

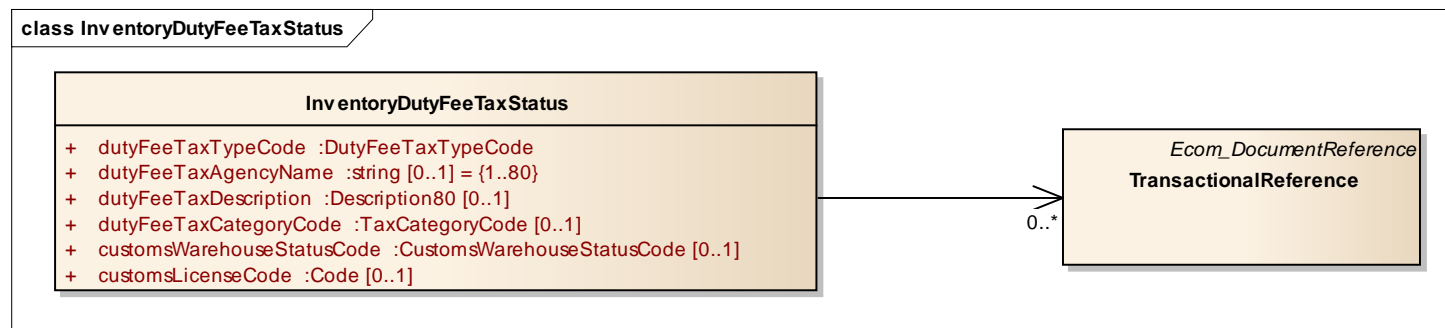

## GDD Report


The content of the: InventoryDutyFeeTaxStatus class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventoryDutyFeeTaxStatus](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventoryDutyFeeTaxStatus)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InventoryDutyFeeTaxStatus				The inventory status details related to a particular duty, tax or fee.	
Association		TransactionalReference	0..*		
Attribute	dutyFeeTaxTypeCode	DutyFeeTaxTypeCode	1..1	Code specifying the type of duty, fee or tax.	
Attribute	dutyFeeTaxAgencyName	string	0..1	Agency responsible for the collection of this duty, fee or tax.	
Attribute	dutyFeeTaxDescription	Description80	0..1	Textual description of this duty, fee or tax.	
Attribute	dutyFeeTaxCategoryCode	TaxCategoryCode	0..1	Code specifying the applicable charge category for this duty, fee or tax. For example low, high, exempt.	
Attribute	customsWarehouseStatusCode	CustomsWarehouseStatusCode	0..1	Code specifying the customs warehouse status of the goods, for example free circulation.	
Attribute	customsLicenseCode	Code	0..1	Code specifying the type of customs license that relates to the customs status of the goods. For example Entrepot Type E.	

### 4.2.31 Inventory Status Quantity Specification

#### Class Diagram

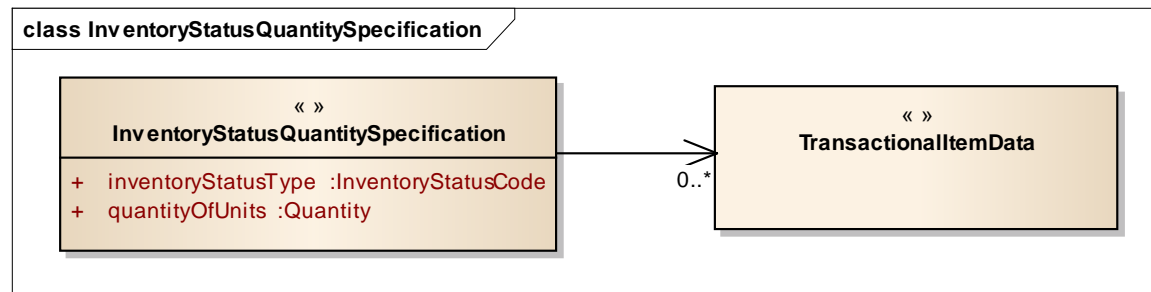

## GDD Report


The content of the: InventoryStatusQuantitySpecification class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventoryStatusQuantitySpecification](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventoryStatusQuantitySpecification)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InventoryStatusQuantitySpecification				Supplies the inventory status information with the quantity and the inventory status type.	
Association		TransactionalItemData	0..*	Extended attributes describing the characteristics and history of the goods.	
Attribute	inventoryStatusType	InventoryStatusCode	1..1	Code specifying the inventory status of the goods.	
Attribute	quantityOfUnits	Quantity	1..1	Quantity of goods with the specified inventory status.	

## 4.2.32 Inventory Sub Location

### Class Diagram

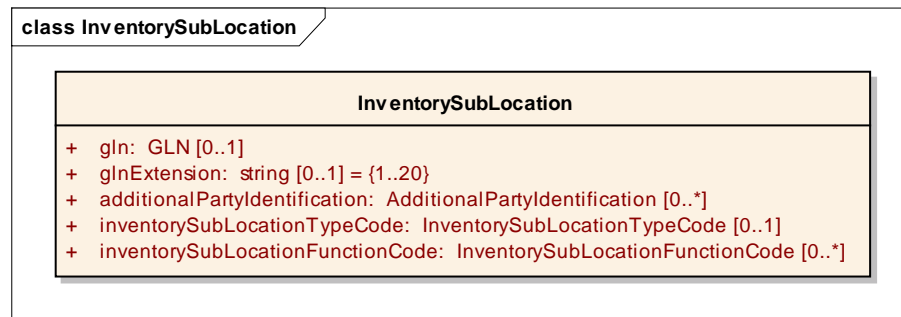

## GDD Report

The content of the: InventorySubLocation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventorySubLocation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InventorySubLocation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InventorySubLocation				An inventory sub location is a physical subdivision within a warehouse. Examples of physical subdivisions: dock, bin, rack, yard.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	gln	GLN	0..1	The Global Location Number (GLN) used to identify the sub location.	
Attribute	glnExtension	string	0..1	Text used to further identify internal physical locations within an inventory sub-location which is identified with a GLN.	
Attribute	additionalPartyIdentification	AdditionalPartyIdentification	0..*	Identifier of the sub-location other than the GLN.	
Attribute	inventorySubLocationTypeCode	InventorySubLocationTypeCode	0..1	Code specifying the primary business function of the physical location.	
Attribute	inventorySubLocationFunctionCode	InventorySubLocationFunctionCode	0..*	Code that further qualifies the business function of the inventory sub location. For example frozen area.	

### 4.2.33 Invoice Document Reference

#### Class Diagram

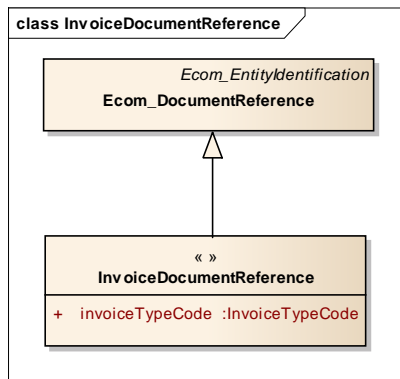

#### GDD Report

The content of the: InvoiceDocumentReference class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InvoiceDocumentReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:InvoiceDocumentReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
InvoiceDocument Reference				Information on an invoice that is referenced in another business document.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Generalization		Ecom_DocumentReference		Provides the details of the referenced document.	
Attribute	invoiceTypeCode	InvoiceTypeCode	1..1	Code specifying the type of invoice.	

## 4.2.34 Legal Registration

### Class Diagram

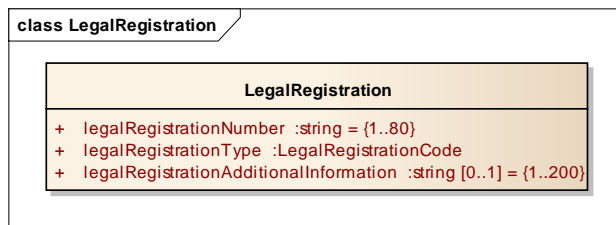

### GDD Report


The content of the: LegalRegistration class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LegalRegistration](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LegalRegistration)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LegalRegistration				The registration details of an organisation in a particular legal register.	
Attribute	legalRegistrationNumber	string	1..1	Unique identifier of the organisation in the legal register.	
Attribute	legalRegistrationType	LegalRegistrationCode	1..1	Code specifying the type of legal register.	
Attribute	legalRegistrationAdditionalInformation	string	0..1	Additional information related to legal registration, e.g. CEO name.	

## 4.2.35 Levied Duty Fee Tax

### Class Diagram

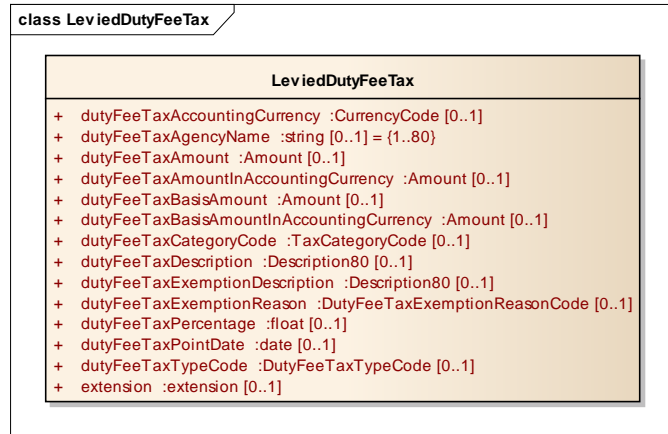

### GDD Report

The content of the: LeviedDutyFeeTax class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LeviedDutyFeeTax](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LeviedDutyFeeTax)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LeviedDutyFeeTax				A duty, fee or tax charged in a particular trade transaction.	
Attribute	dutyFeeTaxAccountingCurrency	CurrencyCode	0..1	The monetary unit used in the calculation of the duty, tax or fee.	
Attribute	dutyFeeTaxAgencyName	string	0..1	Agency responsible for the collection of this duty, fee or tax.	
Attribute	dutyFeeTaxAmount	Amount	0..1	The monetary amount being charged for this duty, fee or tax.	
Attribute	dutyFeeTaxAmountInAccountingCurrency	Amount	0..1	The monetary amount being charged for this duty, fee or tax, expressed in the accounting currency.	
Attribute	dutyFeeTaxBasisAmount	Amount	0..1	The monetary amount on which the calculation of the charged amount is based.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	dutyFeeTaxBasisAmountInAccountingCurrency	Amount	0..1	The monetary amount on which the calculation of the charged amount is based, expressed in the accounting currency.	
Attribute	dutyFeeTaxCategoryCode	TaxCategoryCode	0..1	Code specifying the applicable charge category for this duty, fee or tax. For example low, high, exempt.	
Attribute	dutyFeeTaxDescription	Description80	0..1	Textual description of this duty, fee or tax. For example, "Taxes sur les supports audio" or WEEE for "Waste Electrical and Electronic Equipment".	
Attribute	dutyFeeTaxExemptionDescription	Description80	0..1	Textual description of the reason for being exempt for this duty, fee or tax.	
Attribute	dutyFeeTaxExemptionReason	DutyFeeTaxExemptionReasonCode	0..1	Specifies the reason for exemption of duty, fee or tax	
Attribute	dutyFeeTaxPercentage	float	0..1	Percentage allowing calculation of the amount being charged.	
Attribute	dutyFeeTaxPointDate	date	0..1	Date at which a tax becomes applicable. E.g. If the supply is a straightforward sale of goods, the tax point is normally the date on which the customer takes possession of the goods. For the supply of services, the tax point is normally the date on which the service is completed.	
Attribute	dutyFeeTaxTypeCode	DutyFeeTaxTypeCode	0..1	Code specifying the type of duty, fee or tax.	
Attribute	extension	Extension	0..1		



## 4.2.36 Location Information

### Class Diagram

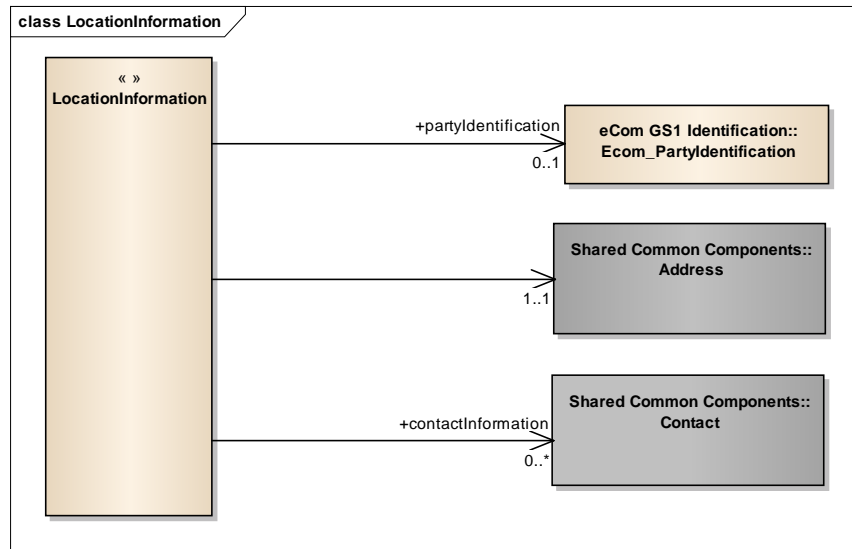

### GDD Report


The content of the: LocationInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LocationInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LocationInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LocationInformation				Provides the contact, name and address, and GLN of the location.	
Association	contactInformation	Contact	0..*	Provides the contact information for a location.	
Association	partyIdentification	Ecom_PartyIdentification	0..1	Provides the location's Global Location Number and additional identifications.	
Association		Address	1..1	Provides the location's address.	

## 4.2.37 Logistic Event

### Class Diagram

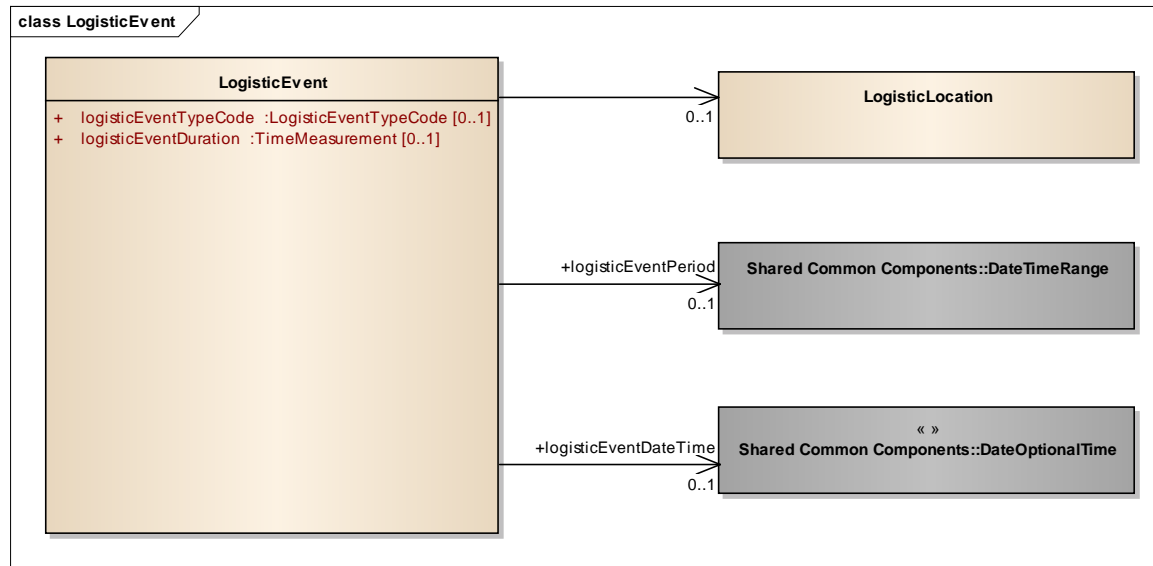

### GDD Report

The content of the: **LogisticEvent** class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticEvent](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticEvent)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticEvent				A planned or actual occurrence of a physical goods movement at a specific time and location.	
Association	logisticEventDateTime	DateOptionalTime	0..1	The date and time on which the logistic event occurs.	
Association	logisticEventPeriod	DateTimeRange	0..1	The timeframe during which the logistic event occurs.	
Association		LogisticLocation	0..1	The location where the logistic event occurs.	
Attribute	logisticEventTypeCode	LogisticEventTypeCode	0..1	Code specifying the type of logistic event. Example: Customs clearance.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	logisticEventDuration	TimeMeasurement	0..1	Measurement value specifying the duration of the logistic event.	

## 4.2.38 Logistic Location

### Class Diagram

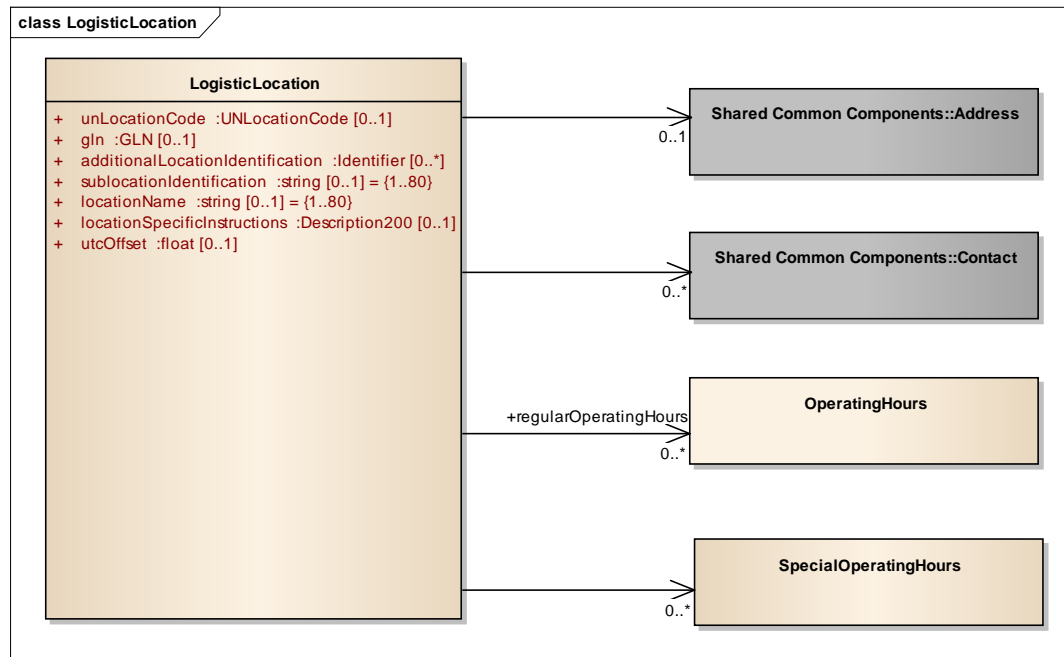

### GDD Report

The content of the: LogisticLocation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticLocation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticLocation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticLocation				Place where a physical goods movement is or will be carried out.	
Association		Address	0..1	Address details of this logistic location.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association		SpecialOperatingHours	0..*	The period during which the location is operational on special days, such as holidays.	
Association	regularOperatingHours	OperatingHours	0..*	The period during which the location is normally operational on a weekday.	
Association		Contact	0..*	Person or department that can be contacted at this logistic location.	
Attribute	unLocationCode	UNLocationCode	0..1	UN/LOCODE is a geographic coding scheme maintained by UN/ECE for locations used in trade and transport with functions such as seaports, rail and road terminals, airports, post offices and border crossing points.	
Attribute	gln	GLN	0..1	The GS1 global location number (GLN) of this logistic location.	
Attribute	additionalLocationIdentification	Identifier	0..*	Identification of a location by use of a code other than the Global Location Number.	
Attribute	sublocationIdentification	string	0..1	Text further specifying the exact logistic location. For example: dock door, department, building.	
Attribute	locationName	string	0..1	The name of this logistic location.	
Attribute	locationSpecificInstructions	Description200	0..1	Instructions related to the pick-up or drop-off of goods at this location.	
Attribute	utcOffset	float	0..1	Numeric value specifying the time zone of the location as offset from the Coordinated Universal Time (UTC).	

## 4.2.39 Logistic Service

### Class Diagram

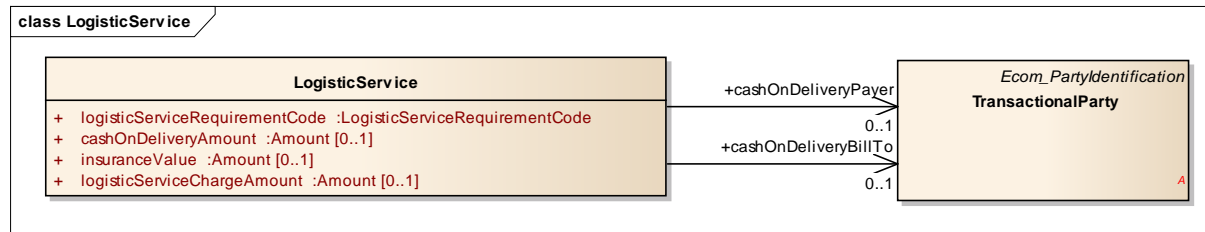

### GDD Report


The content of the: LogisticService class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.qs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:qs1:gdd:bie:LogisticService](http://apps.qs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:qs1:gdd:bie:LogisticService)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticService				Service requested from a logistic services provider.	
Association	cashOnDeliveryBillTo	TransactionalParty	0..1	Identifies the party who receives the cash-on-delivery invoice. Synonym: Invoicee.;[BRAD WIO]	
Association	cashOnDeliveryPayer	TransactionalParty	0..1	Identifies the party who will carry out the payment of the cash-on-delivery invoice.	
Attribute	logisticServiceRequirement Code	LogisticServiceRequirementC ode	1..1	Code specifying the type of service required.; BRAD CON25, SHM23	
Attribute	cashOnDeliveryAmount	Amount	0..1	Monetary amount applicable in case the logistic services provider is requested collect the payment for the delivered goods.; BRAD CON20, SHM6	
Attribute	insuranceValue	Amount	0..1	Monetary amount applicable in case the logistic service provider is requested to arrange the insurance of the delivered goods.; BRAD CON20, SHM6	
Attribute	logisticServiceChargeAmoun t	Amount	0..1	Monetary amount to be paid to the logistic service provider as compensation for the provided service.	

## 4.2.40 Logistic Service Reference

### Class Diagram

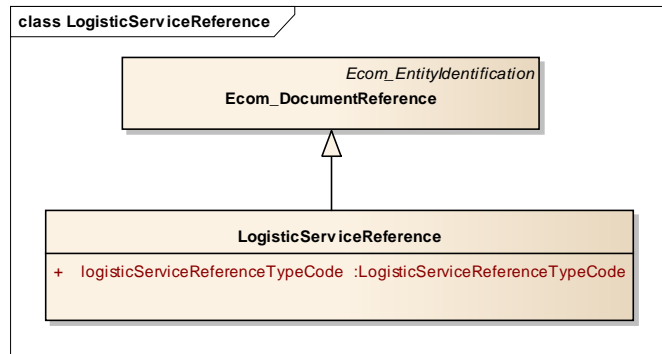

### GDD Report


The content of the: LogisticServiceReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:LogisticServiceReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:LogisticServiceReference)

Content	Attribute/Role	Datatype/Secondaryclass	Multiplicity	Definition	Requirements
LogisticServiceReference				References to GS1 messages related to logistic services	
Attribute	logisticServiceReferenceTypeCode	LogisticServiceReferenceTypeCode	1..1	List of GS1 messages related to logistic services. Allowed code values are specified in GS1 Code List LogisticServiceReferenceTypeCode	
Generalization		Ecom_DocumentReference		Provides the details of the referenced document.	

## 4.2.41 Logistic Unit

### Class Diagram

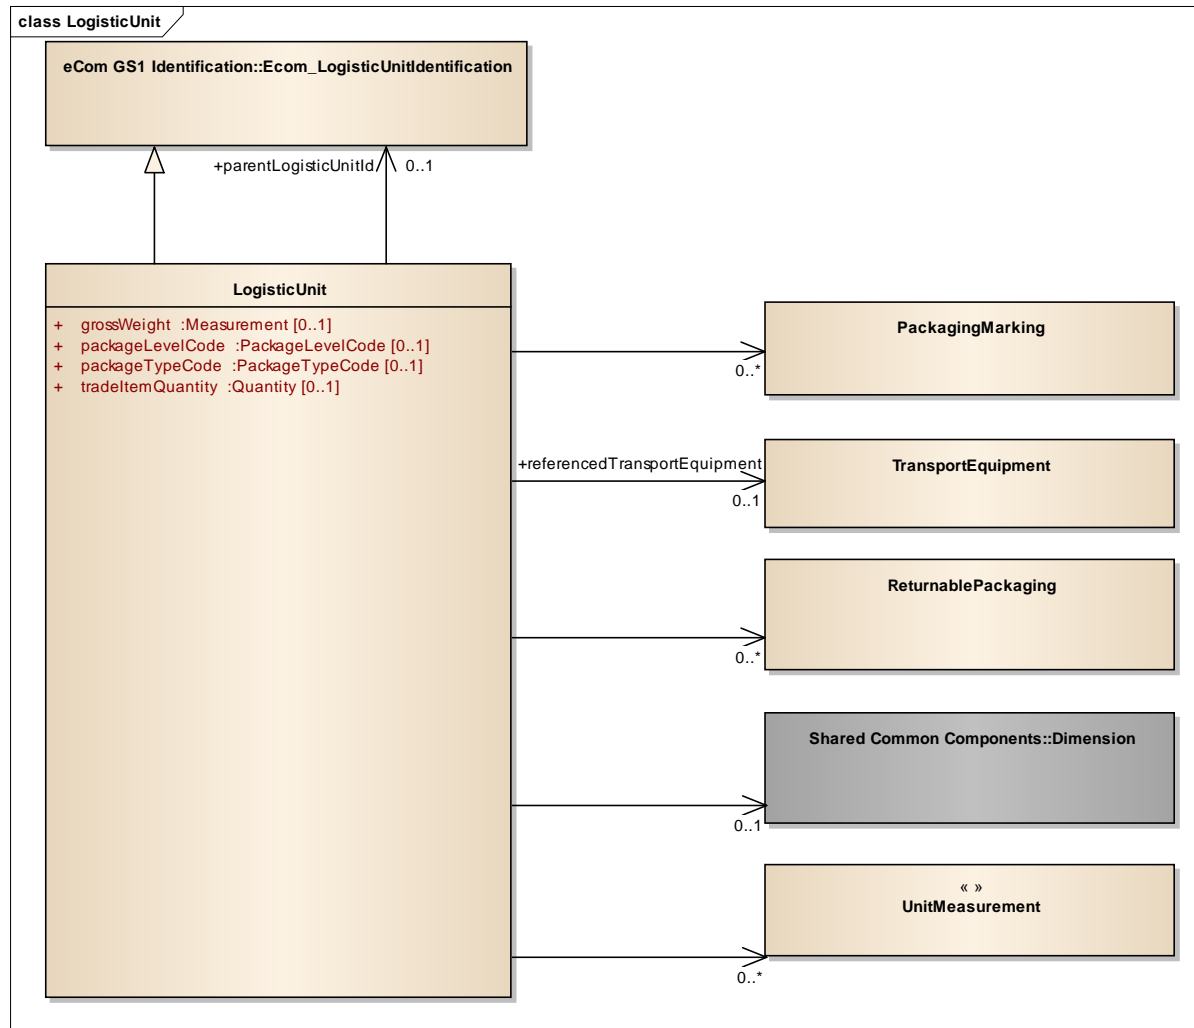

## GDD Report

The content of the: LogisticUnit class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:LogisticUnit](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:LogisticUnit)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticUnit				A <u>logistic unit</u> is a unit of any composition made up for transport and or storage which has to be managed throughout the supply chain.	
Association		Dimension	0..1	The depth, height and width of the logistic unit.	
Association	referencedTransportEquipment	TransportEquipment	0..1	Reference to the transport equipment that contains this logistic unit.	
Association		PackagingMarking	0..*	Details on the markings present on the packaging of the logistic unit.	
Association		UnitMeasurement	0..*	Information specifying the weight or volume of the logistic unit.	
Association		ReturnablePackaging	0..*	Details on the returnable packaging included in the logistic unit.	
Generalization		Ecom_LogisticUnitIdentification		The identification of the logistic unit.	
Association	parentLogisticUnitId	Ecom_LogisticUnitIdentification	0..1	Reference to the logistic unit that contains this logistic unit.	
Attribute	grossWeight	Measurement	0..1	The weight of the logistic unit including packaging. NOTE: With the addition of UnitMeasurement in 3.1 this element has become redundant.	
Attribute	packageLevelCode	PackageLevelCode	0..1	Code specifying the hierarchical level of this logistical unit within a consignment or shipment.	
Attribute	packageTypeCode	PackageTypeCode	0..1	Code specifying the type of logistic unit based on its primary packaging.	
Attribute	tradeItemQuantity	Quantity	0..1	The number of trade items contained in the logistic unit.	



## 4.2.42 Logistic Unit Measurement

### Class Diagram

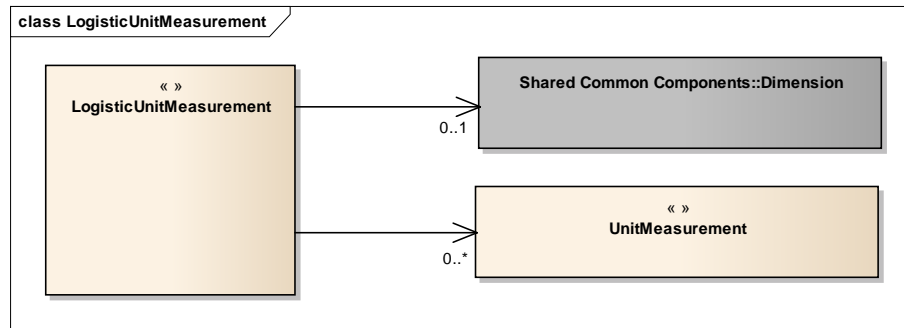

### GDD Report


The content of the: LogisticUnitMeasurement class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticUnitMeasurement](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticUnitMeasurement)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticUnitMeasurement				Information specifying the physical measurement and the physical dimensions of a specific logistic unit.	
Association		UnitMeasurement	0..*	Information specifying the weight or volume of the logistic unit.	
Association		Dimension	0..1	Information specifying the physical dimensions of a specific logistic unit.	

## 4.2.43 Logistic Units

### Class Diagram

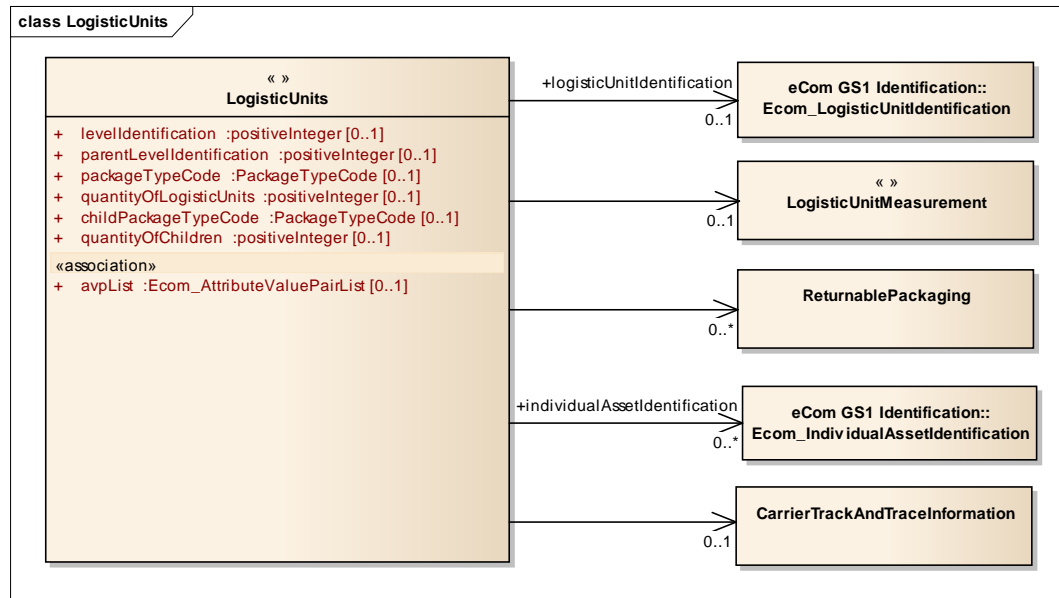

### GDD Report

The content of the: LogisticUnits class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticUnits](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LogisticUnits)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LogisticUnits				Information specifying the physical appearance, the physical dimensions as well as the contents of a specific logistic unit.	
Association		ReturnablePackaging	0..*	Details on the returnable packaging included in the logistic units.; WR 12-199	
Association		CarrierTrackAndTraceInformation	0..1	Set of information related to package tracking and tracing assigned by the carrier.	
Association	individualAssetIdentification	Ecom_IndividualAssetIdentification	0..*	Information used to identify an asset.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association	logisticUnitIdentification	Ecom_LogisticUnitIdentification	0..1	The globally unique identification attached to the logistic unit, used for logistical and traceability purposes.	
Association		LogisticUnitMeasurement	0..1	The physical dimensions of the logistic unit.	
Attribute	levelIdentification	positiveInteger	0..1	Hierarchical structure level identifier (Sequential numbering recommended)	
Attribute	parentLevelIdentification	positiveInteger	0..1	Hierarchical structure parent identifier	
Attribute	packageTypeCode	PackageTypeCode	0..1	Code specifying the type of package.	
Attribute	quantityOfLogisticUnits	positiveInteger	0..1	Number of packages at the current level.	
Attribute	childPackageTypeCode	PackageTypeCode	0..1	Code specifying the type of the included (lower level) package.	
Attribute	quantityOfChildren	positiveInteger	0..1	Number of packages at the next lower level.	
Attribute	avpList	Ecom_AttributeValuePairList	0..1	Temporary attributes introduced between minor versions.	

## 4.2.44 Lower Level Trade Item

### Class Diagram

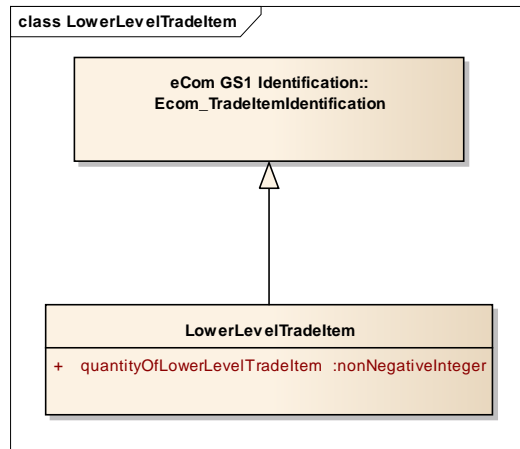

### GDD Report


The content of the: LowerLevelTradeItem class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LowerLevelTradeItem](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:LowerLevelTradeItem)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
LowerLevelTradeItem				Identification and quantity of trade items contained in the current trade item	
Generalization		Ecom_TradeItemIdentification		Provides the GTIN as the unique identifier for the item and optionally additional formats of non GTIN identifiers for the item.	
Attribute	quantityOfLowerLevelTradeItem	nonNegativeInteger	1..1	Number of trade items contained in the current trade item	

## 4.2.45 Operating Hours

### Class Diagram

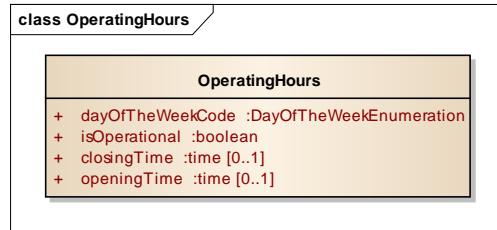

### GDD Report

The content of the: OperatingHours class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:OperatingHours](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:OperatingHours)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
OperatingHours				The period during which a business or facility is operational on a weekday.	
Attribute	dayOfTheWeekCode	DayOfTheWeekEnumeration	1..1	Code specifying the day of the week to which the operating hours apply.	
Attribute	isOperational	boolean	1..1	Indicator specifying whether or not the business or facility is operational on the specified day.	
Attribute	closingTime	time	0..1	Time at which the business or facility closes on the specified day.	
Attribute	openingTime	time	0..1	Time at which the business or facility opens on the specified day.	

## 4.2.46 Order Logistical Date Information

### Class Diagram



### GDD Report

The content of the: OrderLogisticalDateInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:OrderLogisticalDateInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:OrderLogisticalDateInformation)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
OrderLogisticalDateInformation				Contains the choices to select various types of dates or date ranges associated to the order.	
Association	requestedPickUpDateTime	DateOptionalTime	0..1	Provides the date and optional time on which the goods are requested to be available for pickup at the seller's location.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association	requestedDeliveryDateAtUltimateConsignee	DateOptionalTime	0..1	Provides the date and optional time on which the goods are requested to be delivered to the Ultimate Consignee.	
Association	requestedShipDateTime	DateOptionalTime	0..1	Provides the date and optional time on which the goods are requested to be shipped or despatched by the supplier.	
Association	requestedDeliveryDate	DateOptionalTime	0..1	Provides the date and optional time on which the goods are requested to be delivered.	
Association	requestedDeliveryDateRange	DateTimeRange	0..1	Provides the earliest and latest date ranges and the optional times on which the goods are requested to be delivered.	
Association	requestedDeliveryDateRangeAtUltimateConsignee	DateTimeRange	0..1	Provides the earliest and latest date ranges and the optional times on which the goods are requested to be delivered to the Ultimate Consignee.	
Association	requestedShipDateRange	DateTimeRange	0..1	Provides the earliest and latest date ranges and the optional times on which the goods are requested to be shipped or despatched.	

## 4.2.47 Order Logistical Information

### Class Diagram

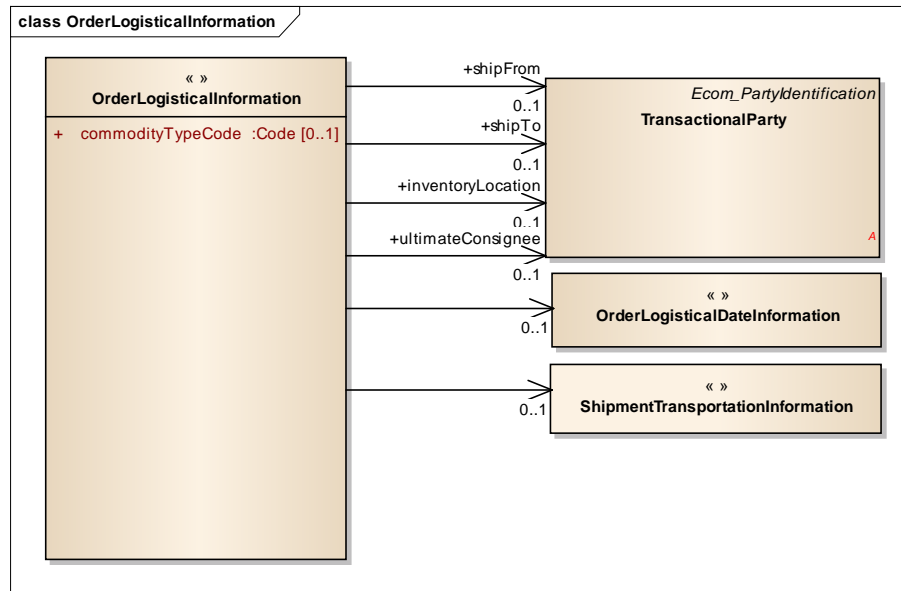

### GDD Report

The content of the: OrderLogisticalInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:OrderLogisticalInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:OrderLogisticalInformation)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
OrderLogisticalInformation				Provides identification of the locations of the parties dealing with the goods associated with the order, as well as the dates or date ranges associated with the order and the transportation of the shipment associated with the order.	
Association	shipFrom	TransactionalParty	0..1	Identifies the origin location from which goods will be shipped.	
Association		OrderLogisticalDateInformation	0..1	Contains the choices to select various types of dates or date ranges associated to the order.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association	ultimateConsignee	TransactionalParty	0..1	Identifies the final destination location to which goods will be shipped.	
Association	inventoryLocation	TransactionalParty	0..1	Identifies the location of merchandise or stock on hand.	
Association		ShipmentTransportationInformation	0..1	Provides information on the means of transportation or carrier associated with the order.	
Association	shipTo	TransactionalParty	0..1	Identifies the destination location to which goods will be shipped.	
Attribute	commodityTypeCode	Code	0..1	Specifies the type of commodity for transport purposes, according to the user-selected coding scheme.	

## 4.2.48 Organisation

### Class Diagram

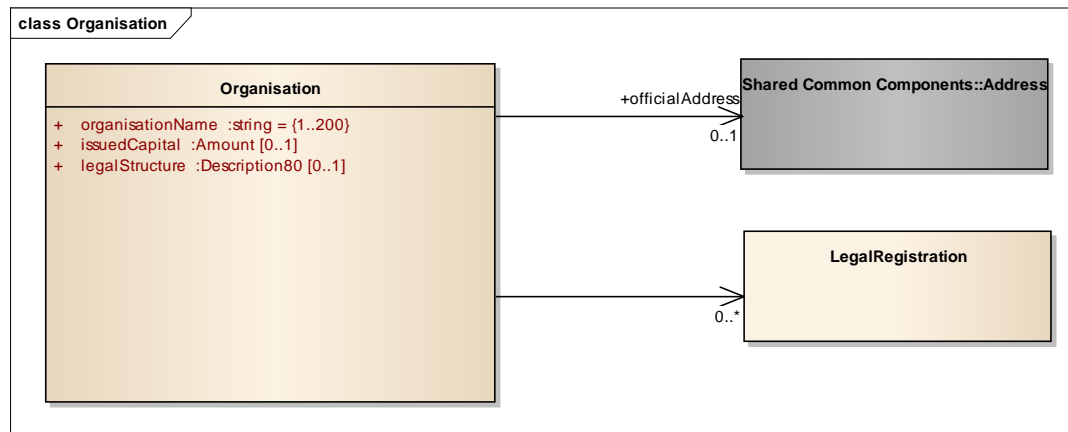

### GDD Report


The content of the: Organisation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:Organisation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:Organisation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Organisation				An entity pursuing collective goals, such as a business, government body, department, charity, or financial institution.	
Association		LegalRegistration	0..*	The registration details of the organisation in a particular legal register.	
Association	officialAddress	Address	0..1	The address where the organisation is officially based.	
Attribute	organisationName	string	1..1	The official name of the organisation.	
Attribute	issuedCapital	Amount	0..1	The amount of the issued capital of the organisation.	
Attribute	legalStructure	Description80	0..1	Description of the type of legal structure of the organisation.	

## 4.2.49 Package Total

### Class Diagram

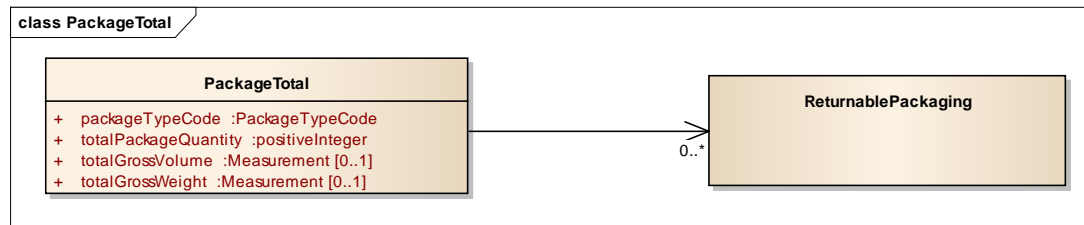

### GDD Report

The content of the: PackageTotal class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:PackageTotal](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:PackageTotal)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PackageTotal				Aggregated information for a specific package type.	
Association		ReturnablePackaging	0..*	Provides detailed information for the administration of returnable packaging.	
Attribute	packageTypeCode	PackageTypeCode	1..1	The code specifying the type of logistics package.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	totalPackageQuantity	positiveInteger	1..1	The total number of units of this package type.	
Attribute	totalGrossVolume	Measurement	0..1	A measure of the gross volume normally calculated by multiplying the maximum length, width, and height of this package type;BRAD CON15, SHM15	
Attribute	totalGrossWeight	Measurement	0..1	A measure of the gross weight (mass) of this package which includes the weight of packaging but which excludes the weight of any transport equipment.;CON14	

## 4.2.50 Packaging Marking

### Class Diagram

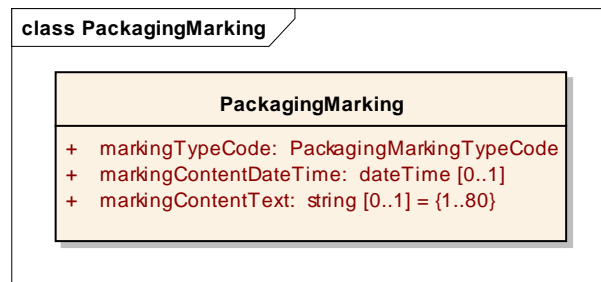

### GDD Report

The content of the: PackagingMarking class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:PackagingMarking](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:PackagingMarking)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PackagingMarking				Textual or bar-coded information that is physically present on the packaging. This information can be about either the contents of the package e.g. best before date or the packaging e.g. Recycling characteristics.	
Attribute	markingTypeCode	PackagingMarkingTypeCode	1..1	The code specifying the type of marking on the package for example batch number.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	markingContentDateTime	dateTime	0..1	The value as printed on the packaging, specified as date time value.	
Attribute	markingContentText	string	0..1	The value as printed on the packaging, specified as text.	

## 4.2.51 Party Reference

### Class diagram

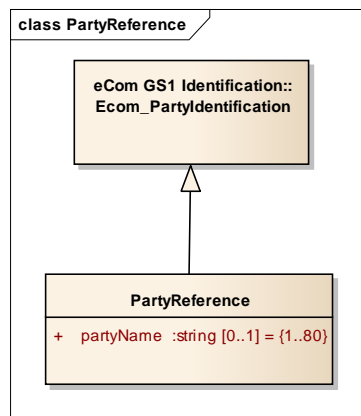

### GDD report


The content of the: PartyReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PartyReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PartyReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PartyReference				Name and identification details of a party.	
Generalization		Ecom_PartyIdentification		The identification of the referenced party.	
Attribute	partyName	string	0..1	The name of the referenced party.	

## 4.2.52 Passenger Information

### Class Diagram

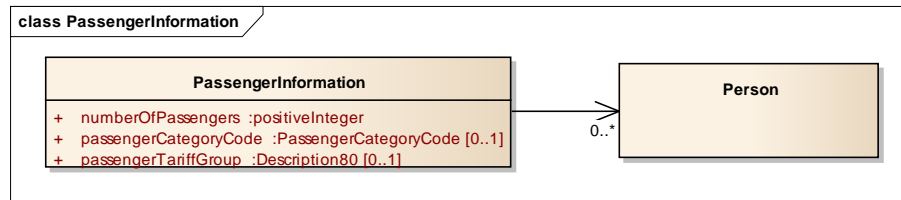

### GDD Report


The content of the: PassengerInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PassengerInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PassengerInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PassengerInformation				Information on persons being transported.	
Association		Person	0..*	Information on the individual persons travelling as passengers.	
Attribute	numberOfPassengers	positiveInteger	1..1	The number of persons being transported.	
Attribute	passengerCategoryCode	PassengerCategoryCode	0..1	Code specifying the role, function or other main characteristic categorizing the type of passenger.	
Attribute	passengerTariffGroup	Description80	0..1	Text describing the tariff group of the transported passengers.	

## 4.2.53 Payment Method

### Class Diagram

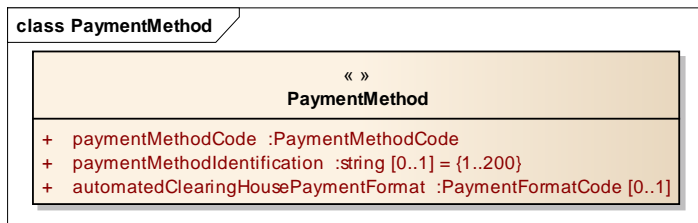

**GDD Report**


The content of the: PaymentMethod class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PaymentMethod](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PaymentMethod)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PaymentMethod				Provides information on the means of payment.	
Attribute	paymentMethodCode	PaymentMethodCode	1..1	A predefined list that identifies a means of payment. For example cheque, bankers draft, credit card, etc..	
Attribute	paymentMethodIdentification	string	0..1	The identification of the payment method, e.g. credit or fuel card number.	
Attribute	automatedClearingHousePaymentFormat	PaymentFormatCode	0..1	A code specifying the format used when a payment is made through an automated clearing house.	

## 4.2.54 Payment Terms

### Class Diagram

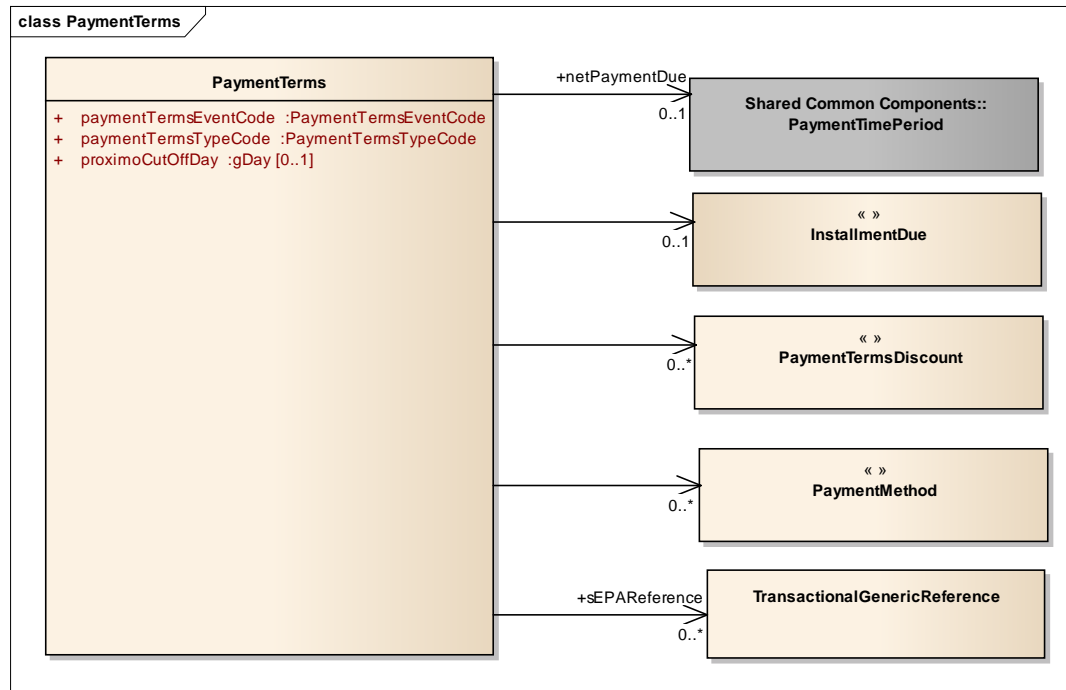

### GDD Report

The content of the: PaymentTerms class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.qs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:qs1:gdd:bie:PaymentTerms](http://apps.qs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:qs1:gdd:bie:PaymentTerms)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PaymentTerms				Terms and conditions by which a payment has been or will be made.	
Association		InstallmentDue	0..1	Information on how the amount to be paid will be split into multiple parts.	
Association		PaymentTermsDiscount	0..*	Additional information on discounts that may be applied to the payment depending on the way the payment is being made for example - 2 percent in 10 days, net 30 -.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association		PaymentMethod	0..*	The payment method used in the payment terms.	
Association	netPaymentDue	PaymentTimePeriod	0..1	A time period specifying when the payment is due.	
Attribute	paymentTermsEventCode	PaymentTermsEventCode	1..1	A code providing the event used as the basis to determine the payment dates, for example RECEIPT_OF_GOODS	
Attribute	paymentTermsTypeCode	PaymentTermsTypeCode	1..1	The type of payment term expressed as a code, for example DISCOUNT.	
Attribute	proximoCutOffDay	gDay	0..1	The day of the month the payment becomes due.	
Association	sEPAReference	TransactionalGenericReference	0..*	A reference required in the Single Euro Payments Area - SEPA, such as Creditor Reference or Mandate Reference.	WR 16-000071

## 4.2.55 Payment Terms Discount

### Class Diagram

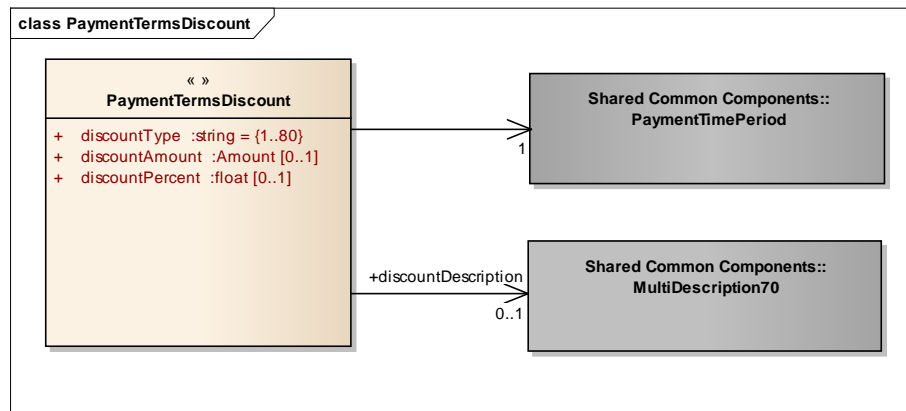

### GDD Report

The content of the: PaymentTermsDiscount class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PaymentTermsDiscount](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:PaymentTermsDiscount)



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
PaymentTermsDiscount				Information on a discount specified in a payment term. Information on discounts that may be applied to the payment depending on the way the payment is being made for example "2 percent in 10 days, net 30".	
Association		PaymentTimePeriod	1	Information on a payment time period determining the applicability of the discount.	
Association	discountDescription	MultiDescription70	0..1	A text field describing the discount.	
Attribute	discountType	string	1..1	A string value that specifies the type of payment discount for example "2 percent in 10 days, net 30".	
Attribute	discountAmount	Amount	0..1	The deduction represented as an amount.	
Attribute	discountPercent	float	0..1	The deduction represented as a percentage.	

## 4.2.56 Person

### Class Diagram

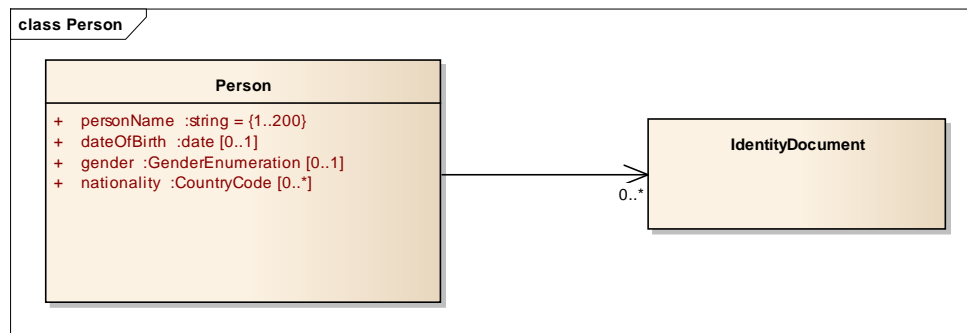

### GDD Report


The content of the: Person class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:Person](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:Person)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Person				A specific human being	
Association		IdentityDocument	0..*	Document, which may be used to verify aspects of this person's personal identity or of this person's relationship with an organisation. If issued in the form of a small, mostly standard-sized card, it is usually called an identity card (IC).	
Attribute	personName	string	1..1	Text used to identify the person, such as the family name and given name.	
Attribute	dateOfBirth	date	0..1	Calendar date on which the person was born.	
Attribute	gender	GenderEnumeration	0..1	Code specifying the sex of the person.	
Attribute	nationality	CountryCode	0..*	The status of belonging to a particular nation by birth or naturalization.	

## 4.2.57 Quantity Specification

### Class Diagram

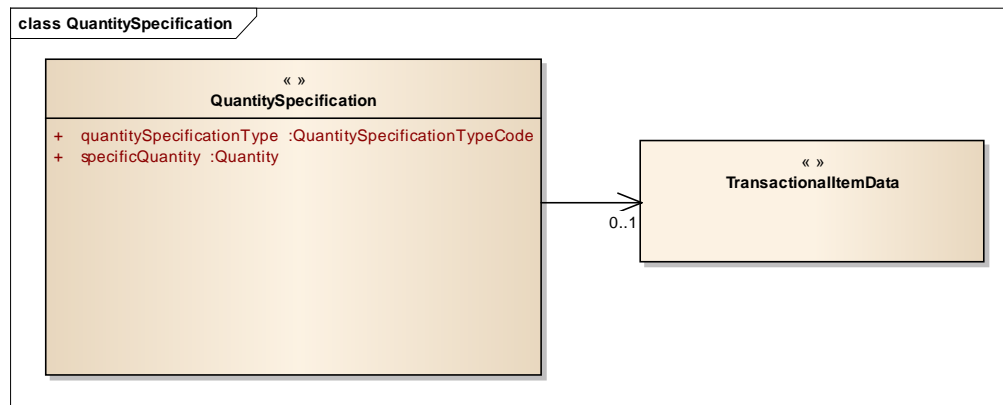

### GDD Report


The content of the: QuantitySpecification class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:QuantitySpecification](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:QuantitySpecification)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
QuantitySpecification				Information specifying details about goods planned to be produced and or delivered.	
Association		TransactionalItemData	0..1	Dynamic characteristics used to specify individual instances of a trade item, such as the best before date, batch number or serial number.	
Attribute	quantitySpecificationType	QuantitySpecificationTypeCode	1..1	Code specifying the type of planning information that is being provided.	
Attribute	specificQuantity	Quantity	1..1	Quantity of goods planned to be delivered or produced.	

## 4.2.58 Referenced Order

### Class Diagram

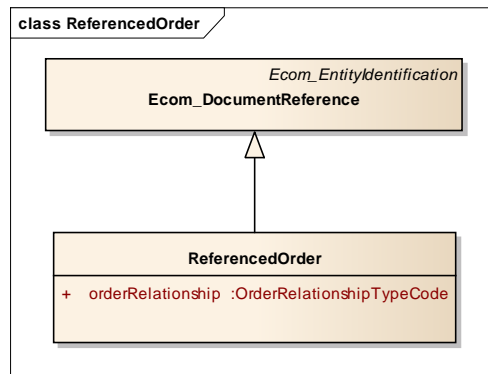

### GDD Report

The content of the: ReferencedOrder class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:ReferencedOrder](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:qdd:bie:ReferencedOrder)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ReferencedOrder				Specifies reference to related purchase order message (or messages) and the type of relationship (e.g. dependent, related, etc.).	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Generalization		Ecom_DocumentReference			
Attribute	orderRelationship	OrderRelationshipTypeCode	1..1		

## 4.2.59 Reference Number

### Class Diagram

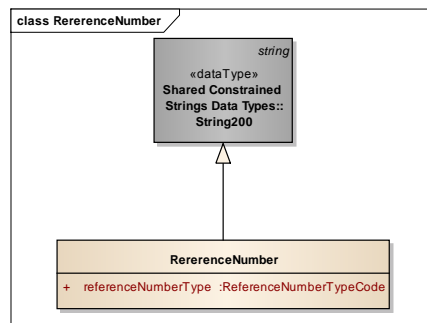

### GDD Report


The content of the ReferenceNumber class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ReferenceNumber](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ReferenceNumber)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
RerenceNumber				A number providing reference defined in the ReferenceNumberTypeCode list.	
Generalization		String200			
Attribute	referenceNumberType	ReferenceNumberTypeCode	1..1	Specifies the type of the reference number.	

## 4.2.60 Returnable Packaging

### Class Diagram

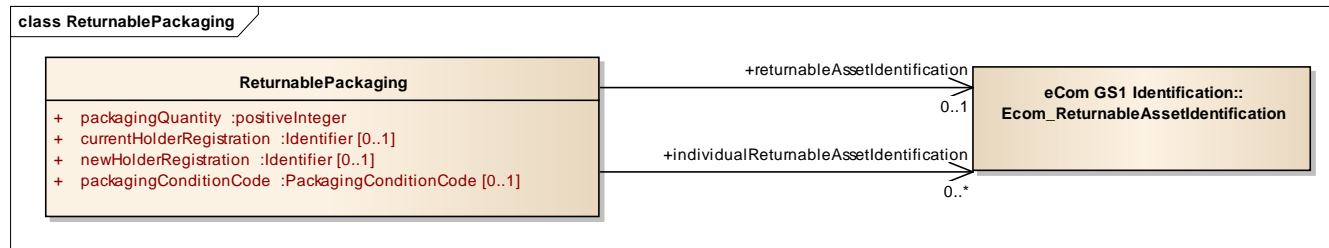

### GDD Report


The content of the: ReturnablePackaging class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ReturnablePackaging](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ReturnablePackaging)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ReturnablePackaging				Provides detailed information for the administration of returnable packaging.	
Association	individualReturnableAssetIdentification	Ecom_ReturnableAssetIdentification	0..*	The returnable asset identifier for an individual piece of returnable packaging.	WR 12-000199
Association	returnableAssetIdentification	Ecom_ReturnableAssetIdentification	0..1	Information used to identify the returnable packaging.	
Attribute	packagingQuantity	positiveInteger	1..1	The number of packaging units (that are returnable)	
Attribute	currentHolderRegistration	Identifier	0..1	Identification of the current administrative holder of the returnable packaging.	
Attribute	newHolderRegistration	Identifier	0..1	Identification of the party the returnable packaging is being transferred to.	
Attribute	packagingConditionCode	PackagingConditionCode	0..1	Code specifying the quality status of the returnable packaging.	

## 4.2.61 Shipment Reference

### Class Diagram

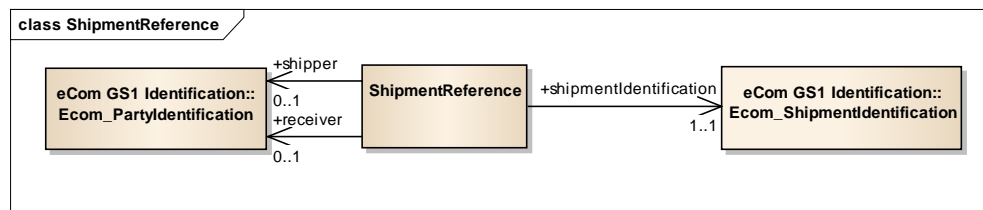

### GDD Report


The content of the: ShipmentReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ShipmentReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ShipmentReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ShipmentReference				Reference to details of shipment.	
Association	receiver	Ecom_PartyIdentification	0..1	A party who engages in receiving goods. In a commercial scenario this would be the customer.	
Association	shipper	Ecom_PartyIdentification	0..1	A party who engages in shipping goods. In a commercial scenario this would be the supplier.	
Association	shipmentIdentification	Ecom_ShipmentIdentification	1..1	Information used to identify a shipment.	

## 4.2.62 Shipment Transportation Information

### Class Diagram

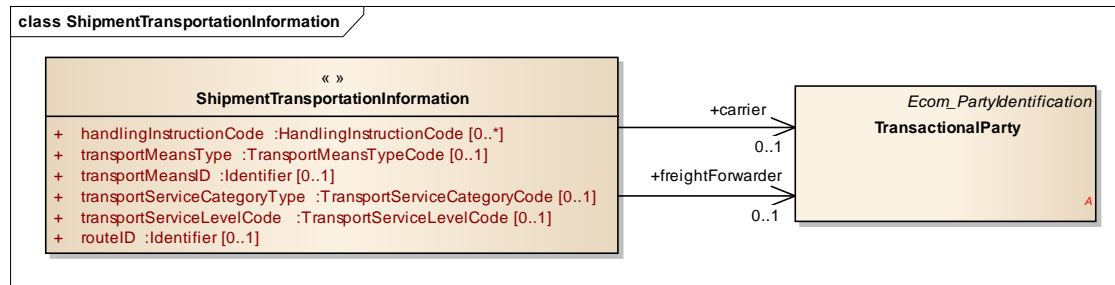

### GDD Report

The content of the: ShipmentTransportationInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ShipmentTransportationInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:ShipmentTransportationInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
ShipmentTransportationInformation				Detailed information on the transportation of a shipment.	
Association	freightForwarder	TransactionalParty	0..1	Party that arranges the carriage of goods including connected services and/or associated formalities on behalf of the shipper (consignor) or consignee.	
Association	carrier	TransactionalParty	0..1	Uniquely identifies the entity that transports the shipment.	
Attribute	handlingInstructionCode	HandlingInstructionCode	0..*	Code identifying handling instructions for this shipment, such as where or how specified packages or containers are to be loaded on a means of transport. Handling instructions can include haulage/ pickup and or delivery instruction/ temperature/humidity instructions	
Attribute	transportMeansType	TransportMeansTypeCode	0..1	Code identifying the means of transport: the type of vehicle, aircraft, vessel or other device used for the transport of goods. The means of transport has a means of locomotion.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	transportMeansID	Identifier	0..1	Vehicle license plate/Aircraft number identifying a means of transport	
Attribute	transportServiceCategoryType	TransportServiceCategoryCode	0..1	A code specifying a type of category for this transport service.	
Attribute	transportServiceLevelCode	TransportServiceLevelCode	0..1	Code specifying the service level required for the transport of the shipment.	
Attribute	routeID	Identifier	0..1	Unique identifier of the standard route that will be used for this transport movement	

### 4.2.63 Source Reference

#### Class Diagram

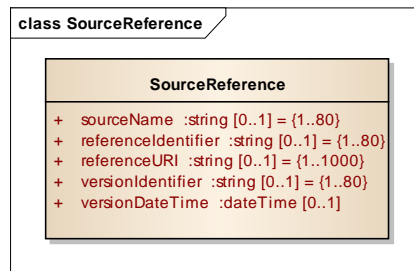

#### GDD Report

The content of the: SourceReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:SourceReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:SourceReference)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
SourceReference				Reference to an external system containing the source data for a certain piece of exchanged information.	
Attribute	sourceName	string	0..1	A text identifying an external source (such as a database).	
Attribute	referenceIdentifier	string	0..1	A reference or identifier to information within an external source. For example the unique key of a database record where the information is stored.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	referenceURI	string	0..1	Simple text string that identifies the name of the reference or the location of the reference on the Internet.	
Attribute	versionIdentifier	string	0..1	Number or string identifying the version of the referenced source.	
Attribute	versionDateTime	dateTime	0..1	Date and time identifying the version of the referenced source.	

## 4.2.64 Special Operating Hours

### Class Diagram

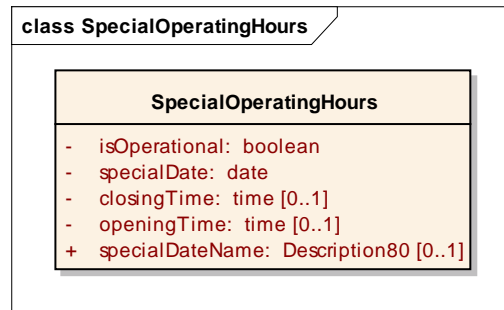

### GDD Report

The content of the: SpecialOperatingHours class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:SpecialOperatingHours](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:SpecialOperatingHours)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
SpecialOperating Hours				The period during which a business or facility is operational on special days, such as holidays.	
Attribute	isOperational	boolean	1..1	Indicator specifying whether or not the business or facility is operational on the specified day.	
Attribute	specialDate	date	1..1	Date specifying the day to which the special operating hours apply.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	closingTime	time	0..1	Time on which the business or facility will close on the specified day.	
Attribute	openingTime	time	0..1	Time on which the business or facility will open on the specified day.	
Attribute	specialDateName	Description80	0..1	Text describing the day to which the special operating hours apply. Example: Christmas.	

## 4.2.65 Trade Statistic Classification

### Class Diagram

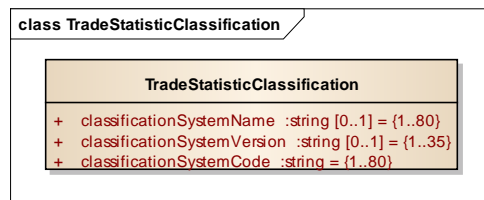


### GDD Report

The content of the: TradeStatisticClassification class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TradeStatisticClassification](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TradeStatisticClassification)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TradeStatisticClassification				Specifies details of the trade classification system used for statistical purposes.	
Attribute	classificationSystemName	string	0..1	Name of the trade classification system used.	
Attribute	classificationSystemVersion	string	0..1	Version of the trade classification system used.	
Attribute	classificationSystemCode	string	1..1	Trade classification code.	

## 4.2.66 Transactional Generic Reference

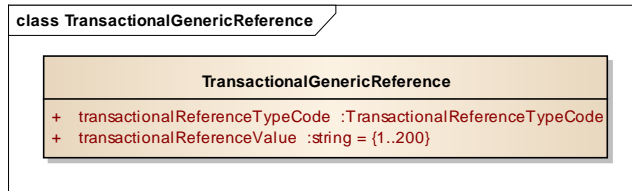


### GDD Report

The content of the: TransactionalGenericReference class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalGenericReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalGenericReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
<b>TransactionalGenericRerefence</b>				Reference to an associated information in support of related business processes. E.g. any kind of internal reference, such as a cost center. The type of references are defined in the TransactionalReferenceTypeCode list.	
Attribute	transactionalReferenceValue	String200	1..1	Contains the reference value	
Attribute	transactionalReferenceTypeCode	transactionalReferenceTypeCode	1..1	Code specifying the type of reference.	

## 4.2.67 Transactional Item Certification

### Class Diagram

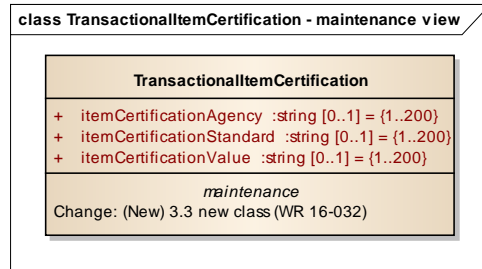

### GDD Report


The content of the: TransactionalItemCertification class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemCertification](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemCertification)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalItemCertification				Information about certification standards to which the transactional trade item complies.	
Attribute	itemCertificationAgency	string	0..1	Name of the organization issuing the certification standard or other requirement being met.	
Attribute	itemCertificationStandard	string	0..1	Name of the certification standard. Free text. Example: Organic product.	
Attribute	itemCertificationValue	string	0..1	The product's certification standard value. E.g. DE-OKO-006	

## 4.2.68 Transactional Item Data

### Class Diagram

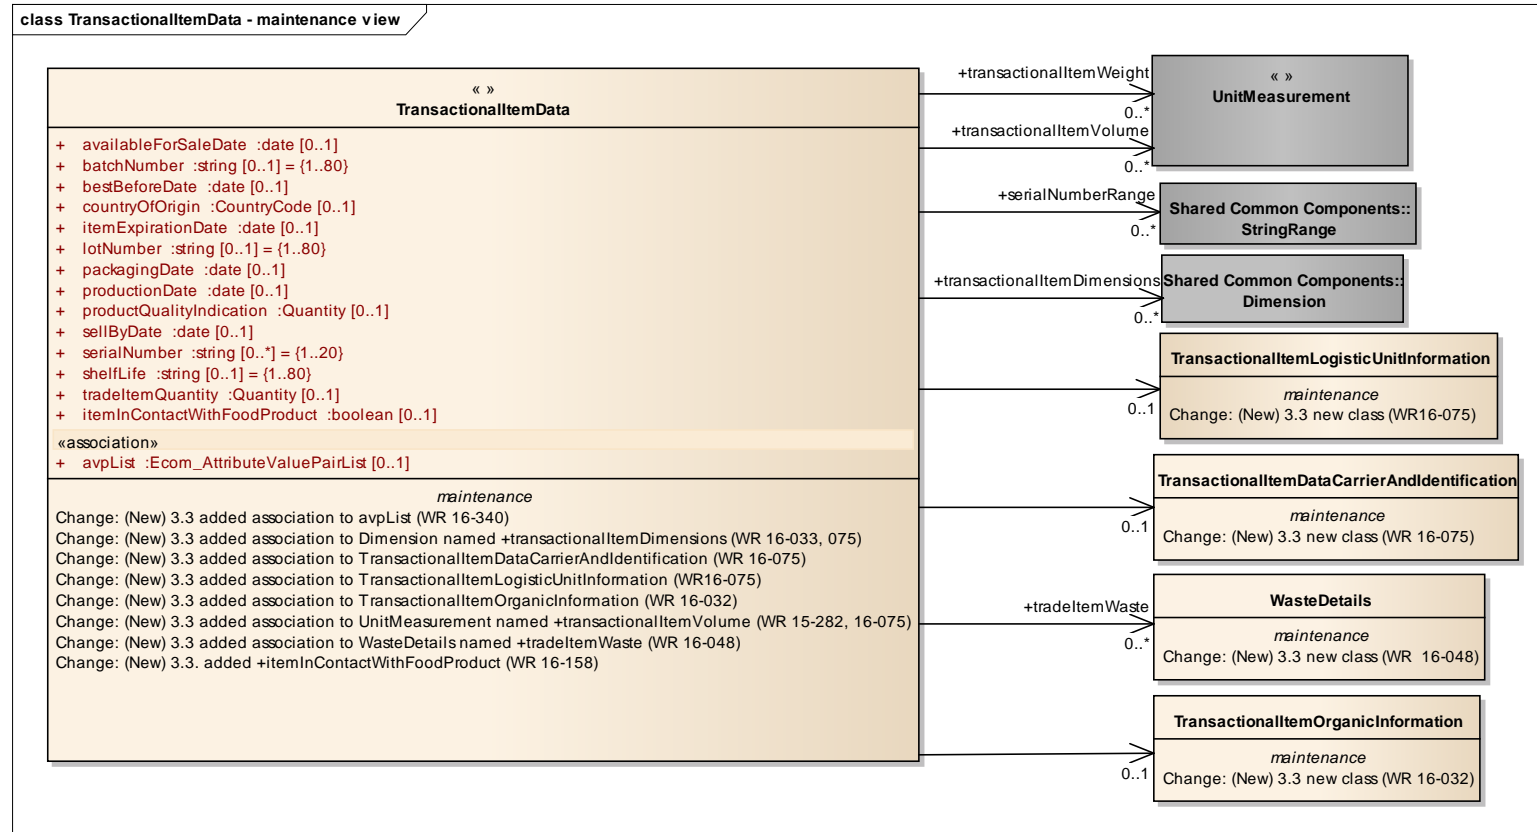

### GDD Report

The content of the: TransactionalItemData class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemData](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemData)



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalItemData				Dynamic characteristics used to specify individual instances of a trade item, such as the best before date, batch number or serial number.	
Association	transactionalItemDimensions	Dimension	0..1	Dimensions of the transactional trade item: depth, height, width	
Association	transactionalItemVolume	UnitMeasurement	0..*	Information on the volume of the specified items.	
Association		TransactionalItemOrganicInformation	0..1	Provides information about whether or not the trade item is organic, with optional organic certification information.	
Association	transactionalItemWeight	UnitMeasurement	0..*	Information on the weight of the specified items.	
Association	serialNumberRange	StringRange	0..*	The minimum and maximum value of one or more ranges of serial numbers related to the specified items.	
Association		TransactionalItemDataCarrierAndIdentification	0..1	Provides information about GS1 Identifier and Data Carriers associated with the trade item.	
Association	tradeItemWaste	WasteDetails	0..*	Provides details of waste generated by the trade item.	
Association		TransactionalItemLogisticUnitInformation	0..1	Specifies packaging parameters of a trade item for transport and storage purposes.	
Attribute	availableForSaleDate	date	0..1	The date the item is available for sale.	
Attribute	batchNumber	string	0..1	A batch unites products or items that have undergone or are grouped together to undergo the same transformation process, not necessarily a production process.	
Attribute	bestBeforeDate	date	0..1	The date before which the product is best used or consumed. It is a statement about quality.	
Attribute	countryOfOrigin	CountryCode	0..1	Country from which the goods are supplied.	




Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	itemExpirationDate	date	0..1	The date after which the product should not be used or consumed. Its meaning is determined based on the trade item context (e.g., for food, the date will indicate the possibility of a direct health risk resulting from use of the product after the date, for pharmaceutical products, it will indicate the possibility of an indirect health risk resulting from the ineffectiveness of the product after the date). It is often referred to as "use by date" or "maximum durability date."	
Attribute	lotNumber	string	0..1	A distinctive combination of numbers and/or letters from which the complete history of the manufacture, processing, packaging, coding and distribution of a batch can be determined.	
Attribute	packagingDate	date	0..1	The date on which the packaging of a product took place.	
Attribute	productionDate	date	0..1	The date that the product was produced.	
Attribute	productQualityIndication	Quantity	0..1	Value used to indicate the quality, such as grade or strength, of a specific batch of products.	
Attribute	sellByDate	date	0..1	The date before or on which, the product should be sold.	
Attribute	serialNumber	string	0..*	A unique identifier assigned to a specific trade item.	
Attribute	shelfLife	string	0..1	The length of time a material, substance, product, or reagent can be stored under specified environmental conditions and continue to meet all applicable specification requirements and/or remain suitable for its intended function.	
Attribute	tradeItemQuantity	Quantity	0..1	The total number of individual trade items being specified.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	avpList	Ecom_AttributeValue PairList	0..1	Temporary attributes introduced between minor versions.	
Attribute	itemInContactWithFoodProduct	boolean	0..1	States weather or not the trade item can come into contact with food products.	

## 4.2.69 Transactional Item Data Carrier and Identification

### Class Diagram



### GDD Report

The content of the: TransactionalItemDataCarrierAndIdentification class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemDataCarrierAndIdentification](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemDataCarrierAndIdentification)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalItemDataCarrierAndIdentification				Provides information about GS1 Identifier and Data Carriers associated with the trade item.	
Attribute	gs1TransactionalItemIdentificationKey	GS1ItemIdentificationKeyCode	0..1	Specifies the type of GS1 Identification Key.	
Attribute	dataCarrier	DataCarrierTypeCode	0..1	A means to represent data in a machine readable form.	



## 4.2.70 Transactional Item Logistic Unit Information

### Class Diagram

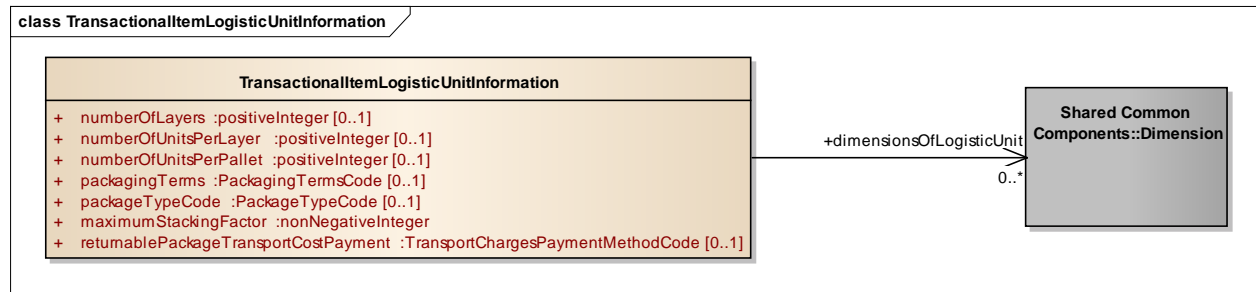

### GDD Report

The content of the: TransactionalItemLogisticUnitInformation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemLogisticUnitInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemLogisticUnitInformation)


Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalItemLogisticUnitInformation				Specifies packaging parameters for transport and storage purposes.	
Association	dimensionsOfLogisticUnit	Dimension	0..*	Information specifying the physical dimensions of a specific logistic unit.	
Attribute	numberOfLayers	positiveInteger	0..1	Number of layers of a product or products within a package, container, pallet, etc.	
Attribute	numberOfUnitsPerLayer	positiveInteger	0..1	Number of units of a product or package within one layer of a package, container, pallet, etc.	
Attribute	numberOfUnitsPerPallet	positiveInteger	0..1	The number of units contained on a pallet calculated by multiplying the number of units per layer by the number of layers on a pallet.	
Attribute	packagingTerms	PackagingTermsCode	0..1	Specifies packaging terms and conditions.	



Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	packageTypeCode	PackageTypeCode	0..1	The package Type (for example case, display) associated with the item contents of a single despatch unit.	
Attribute	maximumStackingFactor	nonNegativeInteger	1..1	A factor that determines the maximum stacking for the product. Indicates the number of levels the product may be stacked.	
Attribute	returnablePackageTransportCostPayment	TransportChargesPaymentMethodCode	0..1		

#### 4.2.71 Transactional Item Organic Information

##### Class Diagram

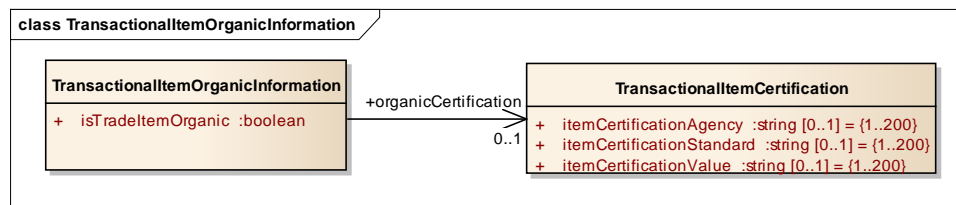


##### GDD Report

The content of the: TransactionalItemOrganicInformation class, its structure and component definitions can be accessed in the Global Data Dictionary: [http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemOrganicInformation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalItemOrganicInformation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalItemOrganicInformation				Provides information about whether or not the trade item is organic, with optional organic certification information.	
Association	organicCertification	TransactionalItemCertification	0..1	Specifies information about the organic trade item certification.	
Attribute	isTradeItemOrganic	boolean	1..1	Information about whether or not the trade item is organic.	

## 4.2.72 Transactional Party

### Class Diagram

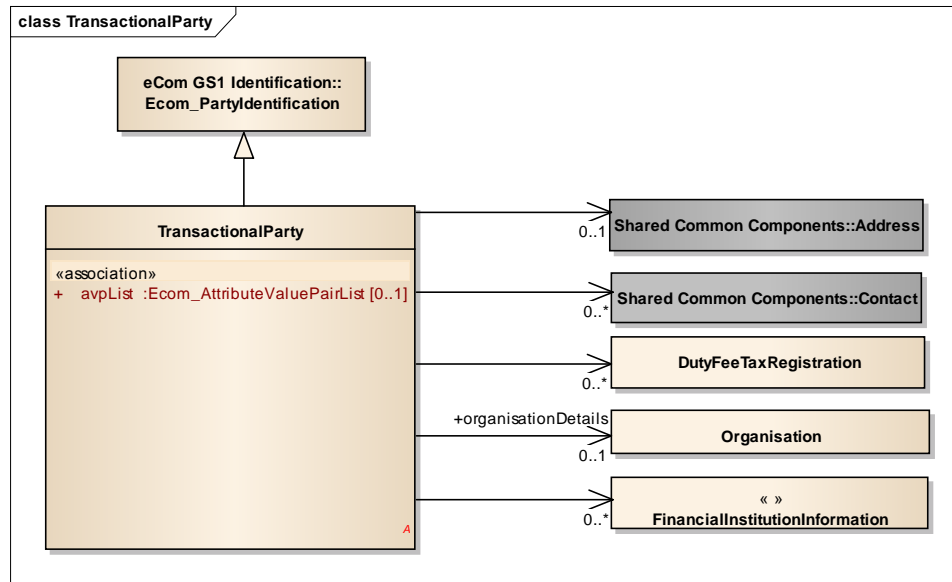

**Important:** Use of the GLN is recommended in B2B scenarios.

### GDD Report

The content of the: TransactionalParty class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalParty](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalParty)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalParty				Identification of and additional information about a party involved in a business transaction.	
Association		Address	0..1	Address of the party involved in the business transaction.	
Generalization		Ecom_PartyIdentification			
Association		FinancialInstitutionInformation	0..*	Information on the financial institution(s) where the party holds an account.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association		DutyFeeTaxRegistration	0..*	Information about the registration for a particular duty, tax or fee, for the party involved in the business transaction.	
Association	organisationDetails	Organisation	0..1	Information about the organisation of the party involved in the business transaction.	
Association		Contact	0..*	Information about the contact for the party involved in the business transaction.	
Attribute	avpList	Ecom_AttributeValuePairList	0..1	Temporary attributes introduced between minor versions.	

### 4.2.73 Transactional Party In Role

#### Class Diagram

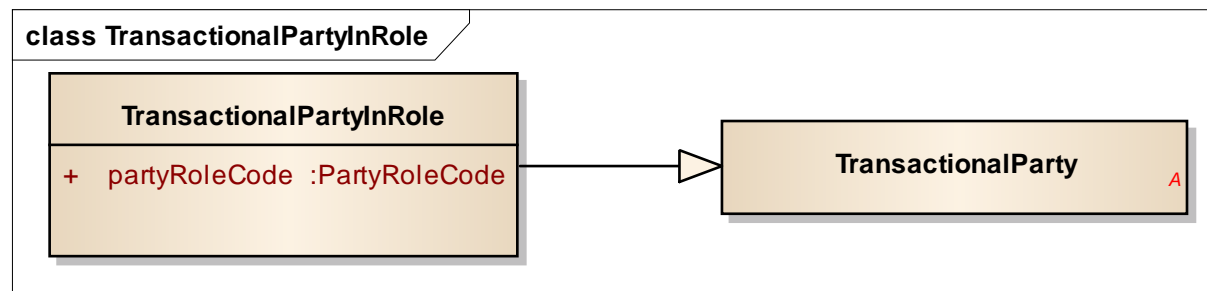

#### GDD Report


The content of the: TransactionalPartyInRole class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalPartyInRole](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalPartyInRole)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalPartyInRole				The identification of a party, by GLN, in a specific party role.	
Generalization		TransactionalParty			
Attribute	partyRoleCode	PartyRoleCode	1..1	A code that identifies the role of a party in a business transaction.	

## 4.2.74 Transactional Reference

### Class Diagram

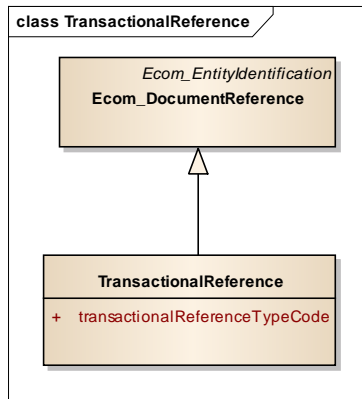

### GDD Report


The content of the: TransactionalReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalReference				Reference to associated information in support of related business processes. E.g. a purchase order, a return authorization number.	New class added in MR3 to replace some uses of TypedEntityId entification
Generalization		Ecom_DocumentReference			
Attribute	transactionalReferenceTypeCode		1..1	Code specifying the type of reference.	

## 4.2.75 Transactional Trade Item

### Class Diagram

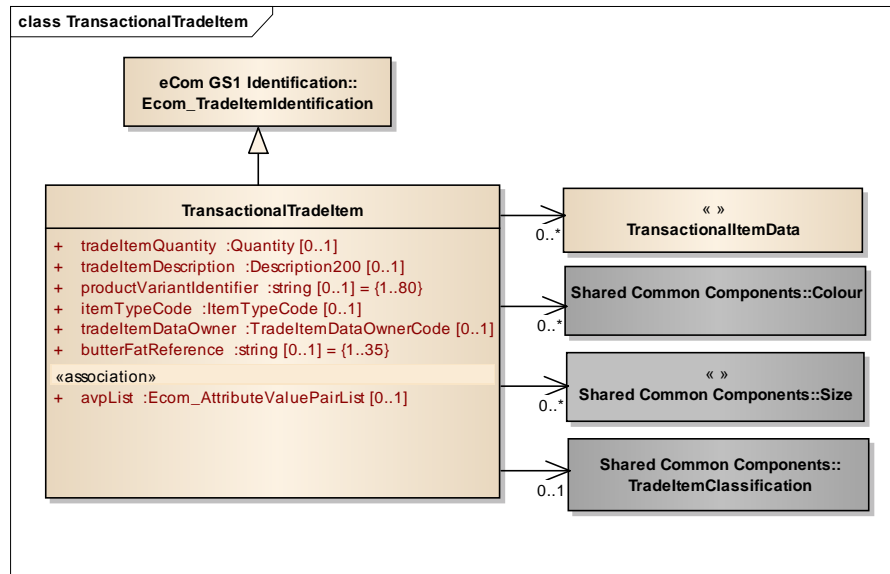

### GDD Report

The content of the: TransactionalTradeItem class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalTradeItem](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransactionalTradeItem)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransactionalTradeItem				A <u>trade item</u> is any item (product or service) upon which there is a need to retrieve pre-defined information and that may be priced, or ordered, or invoiced at any point in any supply chain.	
Generalization		Ecom_TradeItemIdentification			
Association		Size	0..*	The physical dimensions or proportions of the transactional trade item depicted as a code or a description.	

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Association		TradeItemClassification	0..1	Specifies the product class to which a trade item belongs and the classification system being applied.	
Association		TransactionalItemData	0..*	Dynamic characteristics used to specify individual instances of the trade item, such as the best before date, batch number or serial number.	
Association		Colour	0..*	Information specifying the colour of the trade item.	
Attribute	tradeItemQuantity	Quantity	0..1	Specification of the number of units of the trade item. To be applied when no other quantity information, such as the requested quantity or the billed quantity, is present.	
Attribute	tradeItemDescription	Description200	0..1	Textual description of the trade item.	
Attribute	productVariantIdentifier	string	0..1	Text identifying a variant of the product, for example for promotional reasons.	
Attribute	itemTypeCode	ItemTypeCode	0..1	Code specifying the trade item type.	
Attribute	tradeItemDataOwner	TradeItemDataOwnerCode	0..1	Specifies who owns the set of trade item transactional data.	
Attribute	avpList	Ecom_AttributeValuePairList	0..1	Temporary attributes introduced between minor versions.	

## 4.2.76 Transport Cargo Characteristics

### Class Diagram

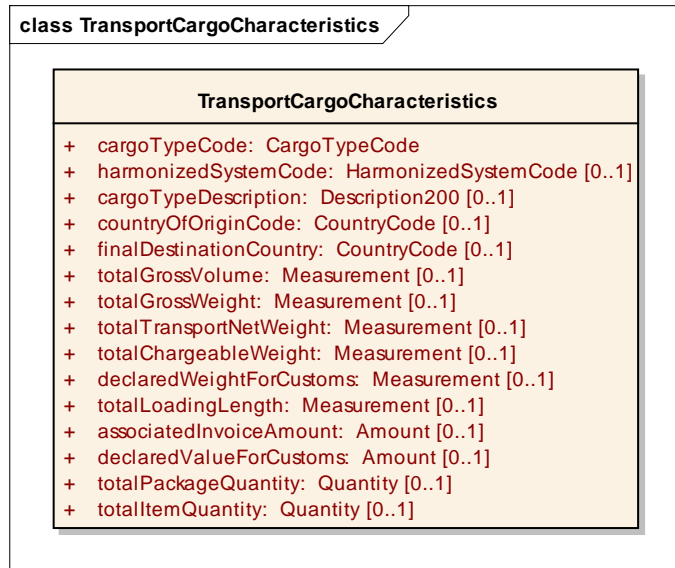

### GDD Report

The content of the: TransportCargoCharacteristics class, its structure and component definitions can be accessed in the Global Data Dictionary:  
[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportCargoCharacteristics](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportCargoCharacteristics)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportCargoChar acteristics				Information on a load of goods being transported.	
Attribute	cargoTypeCode	CargoTypeCode	1..1	Code specifying the classification of a type of cargo for example hazardous cargo.	
Attribute	harmonizedSystemCode	HarmonizedSystemCode	0..1	Code specifying the cargo according to the Harmonised Commodity Description and Coding System (HS) of tariff nomenclature, developed and maintained by the World Customs Organization (WCO)	
Attribute	cargoTypeDescription	Description200	0..1	Free text specifying the classification of a type of cargo.	






Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
Attribute	countryOfOriginCode	CountryCode	0..1	The country where this transport cargo has been manufactured.	
Attribute	finalDestinationCountry	CountryCode	0..1	The country considered to be the final destination for this transport cargo, for regulatory compliance purposes.	
Attribute	totalGrossVolume	Measurement	0..1	A measure of the volume, normally calculated by multiplying the maximum length, width, and height of the packaged goods.	
Attribute	totalGrossWeight	Measurement	0..1	A measure of the mass of the goods including the weight of transport packaging, and potentially the weight of any transport equipment.	
Attribute	totalTransportNetWeight	Measurement	0..1	A measure of the mass of the goods excluding the weight of transport packaging and excluding the weight of any transport equipment.	
Attribute	totalChargeableWeight	Measurement	0..1	Measure of the weight on which freight charges may be calculated for this transport cargo.	
Attribute	declaredWeightForCustoms	Measurement	0..1	Measure of the weight of the goods for customs declaration purposes.	
Attribute	totalLoadingLength	Measurement	0..1	Measure of the total length the goods occupy in a transport means / on a piece of transport equipment. E.g. Loading meters in a truck or trailer	
Attribute	associatedInvoiceAmount	Amount	0..1	The commercial value of the cargo	
Attribute	declaredValueForCustoms	Amount	0..1	The monetary value declared for customs purposes for this transport cargo	
Attribute	totalPackageQuantity	Quantity	0..1	Total number of logistic units (e.g. pallets) in this transport cargo.	
Attribute	totalItemQuantity	Quantity	0..1	The number of trade items on which freight charges may be calculated for this transport cargo.	

## 4.2.77 Transport Equipment

### Class Diagram

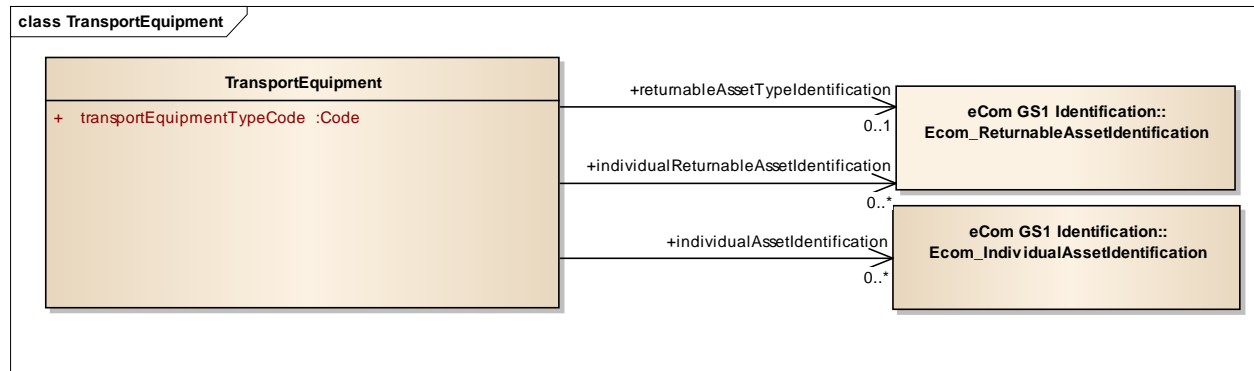

### GDD Report


The content of the: TransportEquipment class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportEquipment](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportEquipment)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportEquipment				<u>Transport equipment</u> is a piece of equipment used to hold, protect or secure cargo for logistics purposes. Transport Equipment is to be moved using Transport Means.	
Association	individualAssetIdentification	Ecom_IndividualAssetIdentification	0..*	The individual asset identifier for an individual piece of transport equipment.	
Association	returnableAssetTypeIdentification	Ecom_ReturnableAssetIdentification	0..1	The returnable asset identifier for the type of transport equipment.	
Association	individualReturnableAssetIdentification	Ecom_ReturnableAssetIdentification	0..*	The returnable asset identifier for an individual piece of transport equipment.	
Attribute	transportEquipmentTypeCode	Code	1..1	Code specifying the transport equipment size and type. ;BRAD Transport Management TEQ1, TEQ2	

## 4.2.78 Transport Means

### Class Diagram

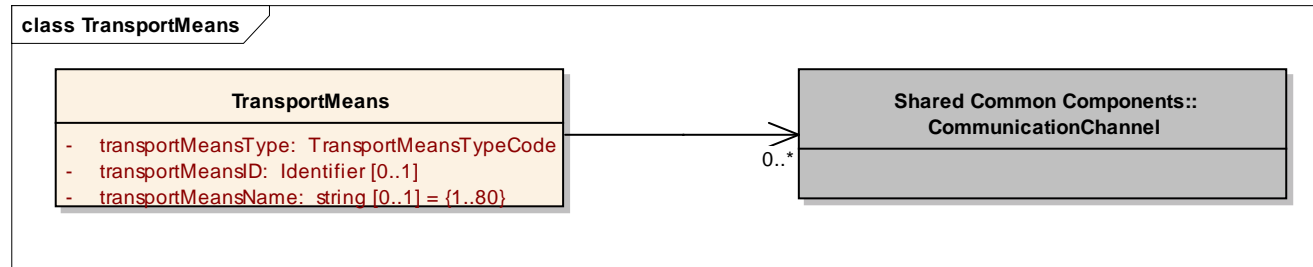

### GDD Report


The content of the: TransportMeans class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportMeans](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportMeans)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportMeans				A <u>transport means</u> is a particular device (with its own engine/power) used to convey goods or other objects from place to place during logistics cargo movements.	
Association		CommunicationChannel	0..*	The channel or manner in which a communication can be made with the transport means. E.g. telephone or email.	
Attribute	transportMeansType	TransportMeansTypeCode	1..1	Code specifying the type of vehicle, aircraft, vessel or other device used for the transport of goods.	
Attribute	transportMeansID	Identifier	0..1	The unique identifier of a particular means of transport. E.g. A license plate number or vessel id.	
Attribute	transportMeansName	string	0..1	The name, expressed as text, of a particular means of transport. E.g. The vessel name.	

## 4.2.79 Transport Reference

### Class Diagram

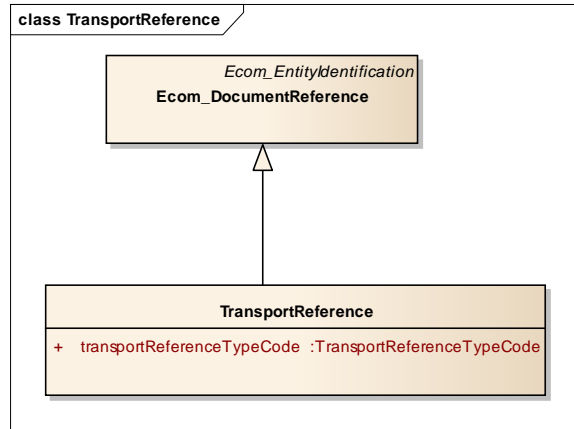

### GDD Report


The content of the: TransportReference class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportReference](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportReference)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportReference				Reference to associated information in support of related business processes. E.g. a purchase order, a bank account number.	
Generalization		Ecom_DocumentReference		Basic details identifying the referenced document or information.	
Attribute	transportReferenceTypeCode	TransportReferenceTypeCode	1..1	Code specifying the type of information that is being referred to.	

## 4.2.80 Transport Seal

### Class Diagram

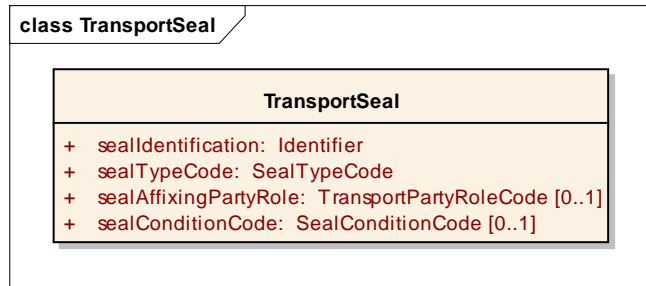

### GDD Report


The content of the: TransportSeal class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportSeal](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportSeal)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportSeal				Information on the item attached to a piece of transport equipment used for closing and/or securing the cargo.	
Attribute	sealIdentification	Identifier	1..1	Provides the seal number or identification of the seal.	
Attribute	sealTypeCode	SealTypeCode	1..1	Code identifying the type of seal used on the cargo.	
Attribute	sealAffixingPartyRole	TransportPartyRoleCode	0..1	The code specifying the role of the party responsible for the sealing of this transport seal.	
Attribute	sealConditionCode	SealConditionCode	0..1	Code specifying the working condition of a seal. E.g. Damaged.	

## 4.2.81 Transport Status

### Class Diagram

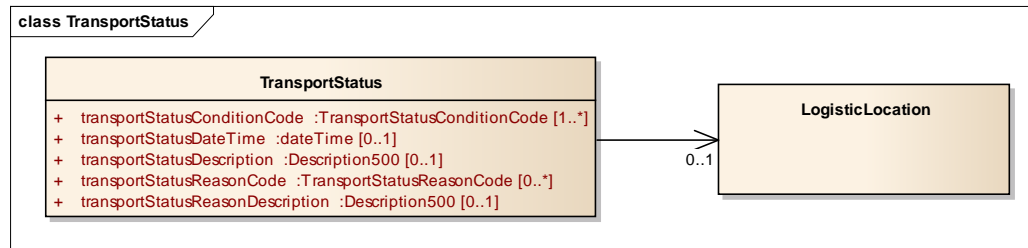

### GDD Report


The content of the: TransportStatus class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportStatus](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportStatus)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportStatus				Information on the transport execution status.	
Association		LogisticLocation	0..1	A location related to the reported transport status.	
Attribute	transportStatusConditionCode	TransportStatusConditionCode	1..*	The code specifying the transport status condition.	
Attribute	transportStatusDateTime	dateTime	0..1	A date time that applies to the reported transport status.	
Attribute	transportStatusDescription	Description500	0..1	The textual description of the transport status.	
Attribute	transportStatusReasonCode	TransportStatusReasonCode	0..*	Code specifying the reason for the transport status	
Attribute	transportStatusReasonDescription	Description500	0..1	A reason, expressed as text, for the transport status.	

## 4.2.82 Transport Tracking Log Event

### Class Diagram

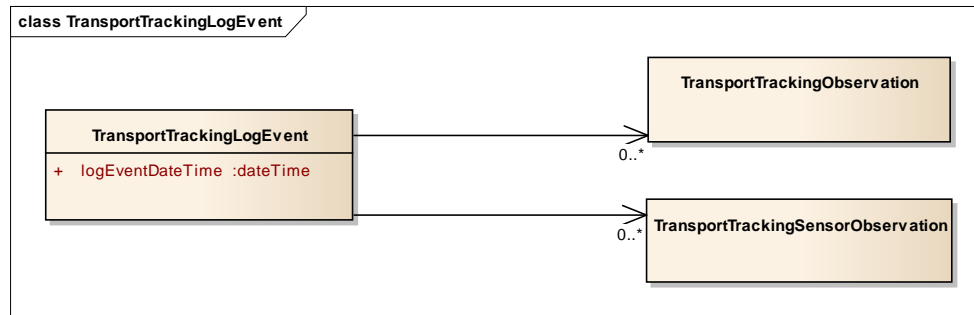

### GDD Report


The content of the: TransportTrackingLogEvent class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingLogEvent](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingLogEvent)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportTrackingLogEvent				A <b>transport tracking log event</b> is a record of a significant occurrence or happening during transport.	
Association		TransportTrackingSensorObservation	0..*	Information on one or more observations grouped by sensor.	
Association		TransportTrackingObservation	0..*	Information on one or more observations.	
Attribute	logEventDateTime	dateTime	1..1	The date time of the recorded event.;BRAD TM TTL2	

## 4.2.83 Transport Tracking Observation

### Class Diagram

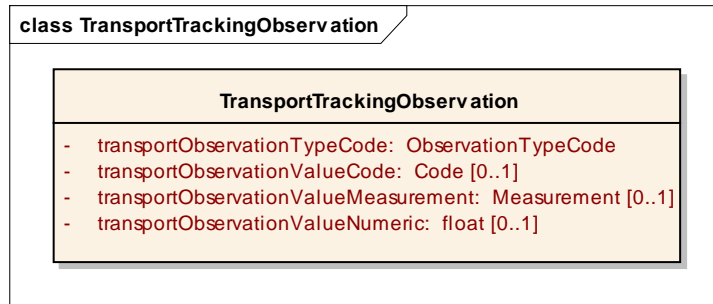

### GDD Report

The content of the: TransportTrackingObservation class, its structure and component definitions can be accessed in the Global Data Dictionary:


[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingObservation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingObservation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportTrackingObservation				An amount, size, or extent as established by measuring during transport.	
Attribute	transportObservationTypeCode	ObservationTypeCode	1..1	Code specifying the type of observation.	
Attribute	transportObservationValueCode	Code	0..1	Coded value of the observation.	
Attribute	transportObservationValueMeasurement	Measurement	0..1	Measurement value of the observation.	
Attribute	transportObservationValueNumeric	float	0..1	Numeric value of the observation.	



## 4.2.84 Transport Tracking Sensor Observation

### Class Diagram

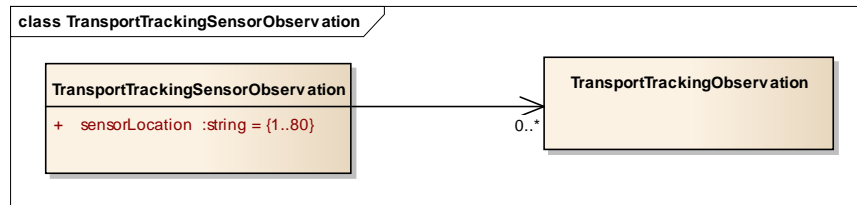

### GDD Report


The content of the: TransportTrackingSensorObservation class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingSensorObservation](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:TransportTrackingSensorObservation)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
TransportTrackingSensorObservation				Transport tracking observations grouped by the sensor reporting the observations.	
Association		TransportTrackingObservation	0..*	The observations reported by the sensor.	
Attribute	sensorLocation	string	1..1	Text specifying the location of the sensor. For example: rear door.	

## 4.2.85 Unit Measurement

### Class Diagram

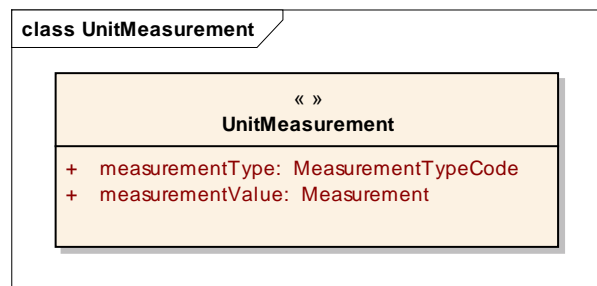

## GDD Report


The content of the: UnitMeasurement class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:UnitMeasurement](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:UnitMeasurement)

Content	Attribute/Role	Datatype/Secondaryclass	Multiplicity	Definition	Requirements
UnitMeasurement				Information specifying the weight or volume of a unit.	
Attribute	measurementType	MeasurementTypeCode	1..1	Code specifying the type of measurement, for example "Gross Weight".	
Attribute	measurementValue	Measurement	1..1	Value of the attribute measured.	

## 4.2.86 Waste Details

### Class Diagram

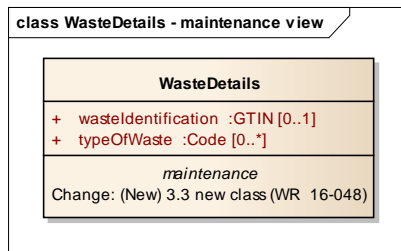

## GDD Report


The content of the: WasteDetails class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:WasteDetails](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:WasteDetails)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirement s
<b>WasteDetails</b>				Provides identification and type of waste according to required classification system.	
Attribute	typeOfWaste	Code	0..*	Provides code and description of waste type according to required classification scheme.	
Attribute	wasteIdentification	GTIN	0..1	The number identifying the type of waste.	

## 4.2.87 XHTML

### Class diagram

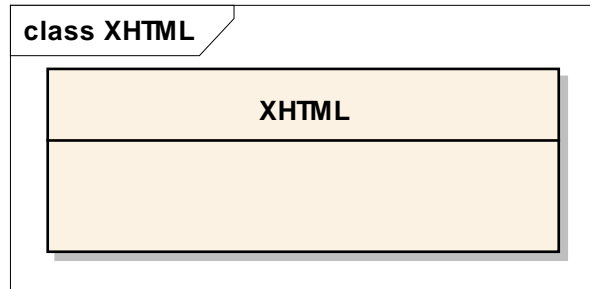

### GDD report

The content of the: XHTML class, its structure and component definitions can be accessed in the Global Data Dictionary:

[http://apps.gs1.org/GDD/bms/Version3\\_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:XHTML](http://apps.gs1.org/GDD/bms/Version3_3/Pages/bieDetails.aspx?semanticURN=urn:gs1:gdd:bie:XHTML)

Content	Attribute / Role	Datatype /Secondary class	Multiplicity	Definition	Requirements
XHTML				Textual content formatted in the Extensible Hyper Text Markup Language (XHTML).	



**Note:** Reference Shared Common Library Business Message (BMS) Release 3.3 for all common information.

## 4.3 Enumerations (message specific)

### 4.3.1 DebitCreditEnumeration

CREDIT	Not Available
DEBIT	Not Available

### 4.3.2 TransportPlanningDateTypeEnumeration

DELIVERY_DATE	Planning is based on the date the shipment will be delivered to the designated location.
PICKUP_DATE	Planning is based on the date the shipment will be picked up from the designated location.

## 4.4 Code Lists



**Note:** Refer to the Global Data Dictionary (GDD) for the code values.

Class	Codelist	GDD Link
	AdministrativeUnitTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:AdministrativeUnitTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:AdministrativeUnitTypeCode</a>
	AppointmentTimeMeasurementBasisTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:AppointmentTimeMeasuremen tBasisTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:AppointmentTimeMeasuremen tBasisTypeCode</a>
	BusinessDocumentProcessingTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:BusinessDocumentProcessingT ypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:BusinessDocumentProcessingT ypeCode</a>
	CargoTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CargoTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CargoTypeCode</a>
	CreditReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CreditReasonCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CreditReasonCode</a>
	CustomsWarehouseStatusCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CustomsWarehouseStatusCod e">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:CustomsWarehouseStatusCod e</a>
	DangerousGoodsAttributeTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DangerousGoodsAttributeType Code">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DangerousGoodsAttributeType Code</a>
	DangerousGoodsRegulationCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DangerousGoodsRegulationCo de">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DangerousGoodsRegulationCo de</a>
	DeliverDateTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliverDateTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliverDateTypeCode</a>
	DeliveryTimeMeasurementBasisTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliveryTimeMeasurementBasi sTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliveryTimeMeasurementBasi sTypeCode</a>
	DeliveryTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliveryTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DeliveryTypeCode</a>

Class	Codelist	GDD Link
	DemandEstimationTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:DemandEstimationTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:DemandEstimationTypeCode</a>
	DutyFeeTaxTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:DutyFeeTaxTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:DutyFeeTaxTypeCode</a>
	EffectiveDateTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:EffectiveDateTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:EffectiveDateTypeCode</a>
	ErrorOrWarningCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ErrorOrWarningCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ErrorOrWarningCode</a>
	FinancialAdjustmentReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:FinancialAdjustmentReasonCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:FinancialAdjustmentReasonCode</a>
	ForecastPurposeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ForecastPurposeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ForecastPurposeCode</a>
	ForecastTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ForecastTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ForecastTypeCode</a>
	GoodsReceiptReportingCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:GoodsReceiptReportingCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:GoodsReceiptReportingCode</a>
	GS1ItemIdentificationKeyCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:GS1ItemIdentificationKeyCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:GS1ItemIdentificationKeyCode</a>
	HandlingInstructionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:HandlingInstructionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:HandlingInstructionCode</a>
	HarmonizedSystemCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:HarmonizedSystemCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:HarmonizedSystemCode</a>
	IdentityDocumentTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:IdentityDocumentTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:IdentityDocumentTypeCode</a>
	InventoryStatusCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventoryStatusCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventoryStatusCode</a>
	InventorySubLocationFunctionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventorySubLocationFunctionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventorySubLocationFunctionCode</a>
	InventorySubLocationTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventorySubLocationTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InventorySubLocationTypeCode</a>
	InvoiceTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InvoiceTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:InvoiceTypeCode</a>
	ItemScopeTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ItemScopeTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ItemScopeTypeCode</a>
	ItemTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ItemTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:ItemTypeCode</a>
	LegalRegistrationCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LegalRegistrationCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LegalRegistrationCode</a>
	LineItemActionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LineItemActionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LineItemActionCode</a>
	LocationScopeParameterTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LocationScopeParameterTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LocationScopeParameterTypeCode</a>
	LocationScopeTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LocationScopeTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LocationScopeTypeCode</a>
	LogisticEventTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LogisticEventTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:LogisticEventTypeCode</a>

Class	Codelist	GDD Link
	LogisticServiceReferenceTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:LogisticServiceReferenceTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:LogisticServiceReferenceTypeCode</a>
	LogisticServiceRequirementCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:LogisticServiceRequirementCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:LogisticServiceRequirementCode</a>
	MarginSchemeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MarginSchemeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MarginSchemeCode</a>
	MaterialTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MaterialTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MaterialTypeCode</a>
	MeasurementTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MeasurementTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:MeasurementTypeCode</a>
	ObservationTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ObservationTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ObservationTypeCode</a>
	OrderInstructionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderInstructionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderInstructionCode</a>
	OrderRelationshipCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderRelationshipTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderRelationshipTypeCode</a>
	OrderTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OrderTypeCode</a>
	OutOfStockMeasurementTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OutOfStockMeasurementTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:OutOfStockMeasurementTypeCode</a>
	PackageLevelCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackageLevelCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackageLevelCode</a>
	PackageTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackageTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackageTypeCode</a>
	PackagingConditionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackagingConditionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackagingConditionCode</a>
	PackagingMarkingTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackagingMarkingTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PackagingMarkingTypeCode</a>
	PassengerCategoryCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PassengerCategoryCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PassengerCategoryCode</a>
	PaymentFormatCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PaymentFormatCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PaymentFormatCode</a>
	PaymentTermsEventCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PaymentTermsEventCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PaymentTermsEventCode</a>
	PerformanceMeasureTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PerformanceMeasureTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PerformanceMeasureTypeCode</a>
	PeriodicityTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PeriodicityTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PeriodicityTypeCode</a>
	PlanBucketSizeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PlanBucketSizeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PlanBucketSizeCode</a>
	PlanCommitmentLevelCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PlanCommitmentLevelCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PlanCommitmentLevelCode</a>
	PrintingInstructionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PrintingInstructionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PrintingInstructionCode</a>
	PurchaseConditionsCommitmentTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PurchaseConditionsCommitmentTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:PurchaseConditionsCommitmentTypeCode</a>
	QualityControlCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:QualityControlCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:QualityControlCode</a>

Class	Codelist	GDD Link
	QuantitySpecificationTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:QuantitySpecificationTypeCod e">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:QuantitySpecificationTypeCod e</a>
	ReceivingConditionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ReceivingConditionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ReceivingConditionCode</a>
	ReferenceNumberTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ReferenceNumberTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ReferenceNumberTypeCode</a>
	RemainingQuantityStatusCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:RemainingQuantityStatusCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:RemainingQuantityStatusCode</a>
	ResponseStatusCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ResponseStatusCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ResponseStatusCode</a>
	RevisionStatusCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:RevisionStatusCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:RevisionStatusCode</a>
	SalesMeasurementTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SalesMeasurementTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SalesMeasurementTypeCode</a>
	SealConditionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SealConditionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SealConditionCode</a>
	SealTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SealTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SealTypeCode</a>
	ServiceLevelBasisTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ServiceLevelBasisTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ServiceLevelBasisTypeCode</a>
	ServiceLevelMeasurementBasisTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ServiceLevelMeasurementBasi sTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:ServiceLevelMeasurementBasi sTypeCode</a>
	SettlementHandlingTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SettlementHandlingTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SettlementHandlingTypeCode</a>
	SettlementTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SettlementTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SettlementTypeCode</a>
	SpecialServiceTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SpecialServiceTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SpecialServiceTypeCode</a>
	StockRequirementTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:StockRequirementTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:StockRequirementTypeCode</a>
	StructureTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:StructureTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:StructureTypeCode</a>
	SymbolComponentCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SymbolComponentCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SymbolComponentCode</a>
	SynchronisationCalculationTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SynchronisationCalculationTyp eCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:SynchronisationCalculationTyp eCode</a>
	DutyFeeTaxExemptionReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DutyFeeTaxExemptionReason Code">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:DutyFeeTaxExemptionReason Code</a>
	TimePeriodScopeTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TimePeriodScopeTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TimePeriodScopeTypeCode</a>
	TradeItemDataOwnerCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TradeItemDataOwnerCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TradeItemDataOwnerCode</a>
	TransactionalReferenceTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TransactionalReferenceTypeCo de">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TransactionalReferenceTypeCo de</a>
	TransportInstructionStatusReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TransportInstructionStatusRea sonCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?seman ticURN=urn:gs1:gdd:cl:TransportInstructionStatusRea sonCode</a>

Class	Codelist	GDD Link
	TransportMeansTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportMeansTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportMeansTypeCode</a>
	TransportModeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportModeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportModeCode</a>
	TransportPartyRoleCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportPartyRoleCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportPartyRoleCode</a>
	TransportPaymentMethodCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportPaymentMethodCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportPaymentMethodCode</a>
	TransportReferenceTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportReferenceTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportReferenceTypeCode</a>
	TransportServiceCategoryCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceCategoryCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceCategoryCode</a>
	TransportServiceConditionTypeCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceConditionTypeCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceConditionTypeCode</a>
	TransportServiceLevelCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceLevelCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportServiceLevelCode</a>
	TransportStatusConditionCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportStatusConditionCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportStatusConditionCode</a>
	TransportStatusReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportStatusReasonCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:TransportStatusReasonCode</a>
	UNLocationCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:UNLocationCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:UNLocationCode</a>
	VarianceReasonCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:VarianceReasonCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:VarianceReasonCode</a>
	WarehouseABCClassificationCode	<a href="http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:WarehouseABCClassificationCode">http://apps.gs1.org/GDD/Pages/clDetails.aspx?semanticURN=urn:gs1:gdd:cl:WarehouseABCClassificationCode</a>



## 5 Business Message Examples

Not applicable

## 6 Implementation Considerations

Not applicable

## 7 Summary of Changes

Any change in the GS1 standards is done based on the Work Request (WR) submitted by the GS1 User Companies or Member Organisations. All Work Requests are documented in the Work Request system available on the GS1 website: <http://wr.gs1.org>. The system is accessible to registered users. New visitors need to register first, to be able to access it. WRs can be searched by the number referenced in tables below, see: Search Work Requests. The number starts with the two last digits of the year when it was submitted, followed by the consecutive number within that year.



**Note:** WRs submitted earlier than February 2012 should be searched in Old Change Requests.

### 7.1 BMS Release 3.0

Changes
<p>BMS Public review:</p> <ul style="list-style-type: none"> <li>changed definition of tradeItemQuantity in TransactionalTradeItem. Also updated the GDD report, since it had 1..1 instead of 0..1 as multiplicity. The class diagram was correct.</li> <li>Made cardinality of LogisticUnitIdentification in LogisticUnits 0..1 instead of 1..1.</li> <li>Added new code data type: DeliveryTypeCode</li> <li>Added new code list: DeliveryTypeCode.</li> <li>Added new code value PENDING to code list LineItemActionCode.</li> <li>Added role name deliveryTermsLocation to association DeliveryTerms → LogisticLocation</li> </ul>
<p><u>Added classes:</u></p> <ul style="list-style-type: none"> <li>InvoiceDocumentReference</li> <li>PartyReference</li> <li>SourceReference</li> <li>TransactionalReference</li> <li>XHTML</li> </ul>
<p><u>Added data types:</u></p> <ul style="list-style-type: none"> <li>DataCarrierTypeCode</li> <li>DebitCreditEnumeration</li> <li>FinancialAdjustmentReasonCode</li> <li>GDTI</li> <li>InventoryActivityTypeCode</li> <li>InventoryMovementTypeCode</li> <li>MaterialTypeCode</li> <li>PlanBucketSizeCode</li> <li>SettlementAdjustmentReferenceTypeCode</li> <li>SettlementHandlingTypeCode</li> <li>StockRequirementTypeCode</li> <li>StructureTypeCode</li> <li>SymbolComponentCode</li> <li>TradeitemUnitDescriptorCode</li> </ul>

### Changes

- TransactionalReferenceTypeCode
- TransportPlanningDateTypeEnumeration

#### Added codelists:

- DataCarrierTypeCode
- DebitCreditEnumeration
- FinancialAdjustmentReasonCode
- InventoryActivityTypeCode
- InventoryMovementTypeCode
- MaterialTypeCode
- PlanBucketSizeCode
- SettlementHandlingTypeCode
- StockRequirementTypeCode
- StructureTypeCode
- SymbolComponentCode
- TradeitemUnitDescriptorCode
- TransactionalReferenceTypeCode
- TransportPlanningDateTypeEnumeration

Removed data type and code list for SettlementAdjustmentReferenceTypeCode

#### For Publication

- Added Copyright R in GS1 Logo
- Changed Status to Approved
- Removed year reference in footer copyright statement
- Added Adherence to AG Principles Section
- Replaced code I with AND in AllowanceChargeTypeCode

## 7.2 BMS Release 3.1

### Changes

- Removed PaymentTermsTypeCode and AllowanceChargeTypeCode.data types and associated code lists. Added to Shared Common. BSD.
- Removed AllowanceOrChargeTypeEnumeration data type and associated code list. Added to Shared Common BSD.

#### new classes:

- AdministrativeUnit
- CarrierPickUpDropOffDetails
- InventorySubLocation
- InventoryDutyFeeTaxStatus

#### New data types and codelists:

- AdministrativeUnitTypeCode
- CustomsWarehouseStatusCode
- InventorySubLocationFunctionCode
- InventorySubLocationTypeCode
- PackagingConditionCode

#### Updated code lists:

##### ErrorOrWarningCode:

- Added CONFIRMED\_BUT\_DELAY\_EXPECTED

##### TransportServiceLevelCode:

- Added RETURN\_SERVICE

## Changes

Updated Code List InventoryMovementTypeCode, added:

- INCREASE, DECREASE

updated classes:

### class LogisticUnit - maintenance view

LogisticUnit
<ul style="list-style-type: none"> <li>- grossWeight: Measurement [0..1]</li> <li>- packageLevelCode: PackageLevelCode [0..1]</li> <li>- packageTypeCode: PackageTypeCode [0..1]</li> <li>- tradeItemQuantity: Quantity [0..1]</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 added association UnitMeasurement

### class LogisticUnits - maintenance view

« » LogisticUnits
<ul style="list-style-type: none"> <li>+ levelIdentification: positiveInteger [0..1]</li> <li>+ parentLevelIdentification: positiveInteger [0..1]</li> <li>+ packageTypeCode: PackageTypeCode [0..1]</li> <li>+ childPackageTypeCode: PackageTypeCode [0..1]</li> <li>+ quantityOfChildren: positiveInteger [0..1]</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 added association to ReturnablePackaging (WR 12-199)

### class ReturnablePackaging - maintenance view

ReturnablePackaging
<ul style="list-style-type: none"> <li>+ packagingQuantity: positiveInteger</li> <li>+ currentHolderRegistration: Identifier [0..1]</li> <li>+ newHolderRegistration: Identifier [0..1]</li> <li>+ packagingConditionCode: PackagingConditionCode [0..1]</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 existing association to ReturnableAssetIdentification 1..1 ==> 0..1 (WR 12-199) Change: (Verified) 3.1 added association +individualReturnableAssetIdentification (WR 12-199) Change: (Verified) 3.1 added packagingConditionCode (BRAD WIO-ecom-2)

### class TransactionalTradeItem - maintenance view

TransactionalTradeItem
<ul style="list-style-type: none"> <li>+ tradeItemQuantity: Quantity [0..1]</li> <li>+ tradeItemDescription: Description200 [0..1]</li> <li>+ productVariantIdentifier: string [0..1] = {1..80}</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 added productVariant (BRAD WIO-ecom-3)

## Changes

### class LogisticService - Maintenance View

LogisticService
<ul style="list-style-type: none"> <li>+ logisticServiceRequirementCode: LogisticServiceRequirementCode</li> <li>+ cashOnDeliveryAmount: Amount [0..1]</li> <li>+ insuranceValue: Amount [0..1]</li> <li>+ logisticServiceChargeAmount: Amount [0..1]</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 / Post POC1: added cashOnDeliveryPayer and cashOnDeliveryBillTo

### class InventorySubLocation - Maintenance

InventorySubLocation
<ul style="list-style-type: none"> <li>+ gln: GLN [0..1]</li> <li>+ glnExtension: string [0..1] = {1..20}</li> <li>+ additionalPartyIdentification: AdditionalPartyIdentification [0..*]</li> <li>+ inventorySubLocationTypeCode: InventorySubLocationTypeCode [0..1]</li> <li>+ inventorySubLocationFunctionCode: InventorySubLocationFunctionCode [0..*]</li> </ul>
<b>maintenance</b> Change: (Verified) 3.1 new class (BRAD WIO and WIM) Defect: (Verified) post POC: renamed SubLocationIdentification into glnExtension, made length 20. Defect: (Verified) post POC1: changed sequence of attributes, made typeCode optional


### class ShipmentTransportationInformation - maintenance view

« » ShipmentTransportationInformation
<ul style="list-style-type: none"> <li>+ handlingInstructionCode: HandlingInstructionCode [0..*]</li> <li>+ transportMeansType: TransportMeansTypeCode [0..1]</li> <li>+ transportServiceCategoryType: TransportServiceCategoryCode [0..1]</li> <li>+ transportServiceLevelCode : TransportServiceLevelCode [0..1]</li> </ul>
<b>maintenance</b> Change: (New) 3.1: added freightForwarder (BRAD WIO)

## 7.3 BMS Release 3.2

Change	Associated WR
<div><p>New class created to add to warehousing messages Carrier Track And Trace Information with:</p><ul style="list-style-type: none"><li>■ Package tracking number</li><li>■ Carrier track and trace URL</li></ul></div> <div><div><div>class CarrierTrackAndTraceInformation - Maintenance</div><div><div><div>CarrierTrackAndTraceInformation</div><div><div>+ carrierTrackAndTraceURL :anyURI [0..1] = {1..2000}</div><div>+ packageTrackingNumber :String [0..1] = {1..70}</div></div><div><div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div></div><div><div><div><div></div><div></div></div><div><div></div></div></div><div><div></div>&lt;/</div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div></div>	

The new class Carrier Track And Trace Information is associated to Logistic Units class

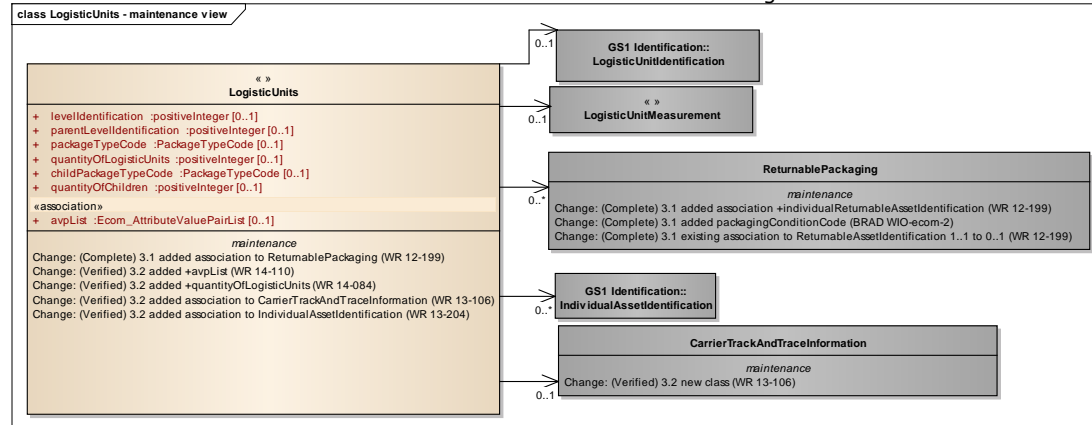


Created new classes to make the Item Data Notification message suitable to support new transport planning, transport execution and warehousing messages:


- Child package level
- Lower level Trade Item

13-000188


class ChildPackageLevel - maintenance view

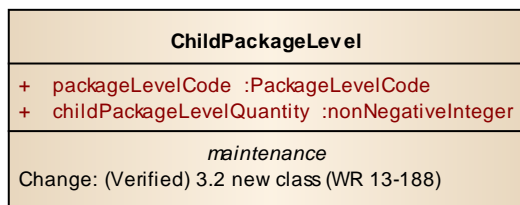

class LowerLevelTradeItem - maintenance view

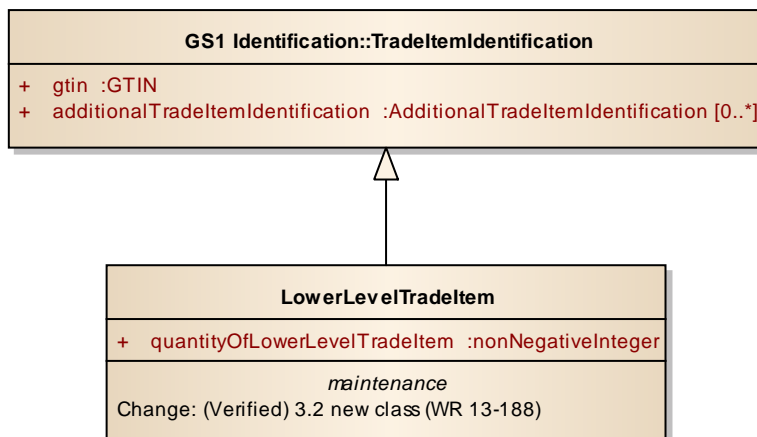

class TransactionalPartyInRole - maintenance view

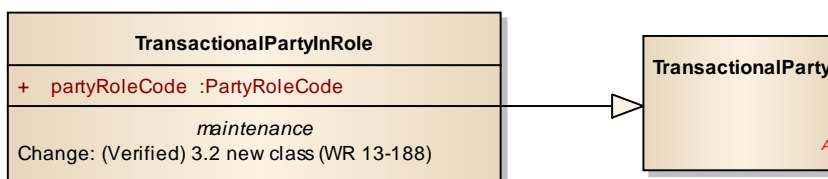


- Created code list: [QualityControlCode](#)

<div><div>class Code Q-Z - maintenance view</div><div><div>«dataType» QualityControlCode</div><div><i>maintenance</i> Change: (Verified) 3.2 new data type (WR 13-188)</div></div></div>		
<div><div>■ Created code list: <a href="#">WarehouseABCClassificationCode</a></div><div><div>class Code Q-Z - maintenance view</div><div><div>GS1Code</div><div>«dataType» WarehouseABCClassificationCode</div><div><i>maintenance</i> Change: (Verified) 3.2 new data type (WR 13-188)</div></div></div></div>		13-000188
<div>Created new classes to make the Invoice message suitable to support Transport and Logistic processes:</div> <div><div>■ Consignment Reference</div><div>■ LogisticServiceReference</div><div>■ ShipmentReference</div></div> <div><div>class ConsignmentReference - Maintenance view</div><div><div><div>GS1 Identification:: PartyIdentification</div><div>+consignor</div><div>+consignee</div></div><div><div>ConsignmentReference</div><div><i>maintenance</i> Change: (Verified) 3.2 new class (WR 13-192)</div></div><div><div>GS1 Identification:: ConsignmentIdentification</div></div><div><div>0..1</div><div>0..1</div></div></div></div> <div><div>class LogisticServiceReference - Maintenance view</div><div><div><div>EntityIdentification</div><div>Shared Common Components::DocumentReference</div><div><i>maintenance</i> Change: (Complete) 3.1 added revisionNumber (WR 12-153)</div></div><div><div>LogisticServiceReference</div><div>+ logisticServiceReferenceTypeCode</div><div><i>maintenance</i> Change: (Verified) 3.2 new class (WR 13-192)</div></div></div></div>		13-000192

<p><b>class ShipmentReference - Maintenance view</b></p> <p>■ Created code list: <a href="#">LogisticServiceReferenceTypeCode</a></p> <p><b>class Code J-P - maintenance view</b></p>	
<p>■ Created code list: <a href="#">MarginSchemeCode</a> to meet requirements of COUNCIL DIRECTIVE 2010/45/EU</p> <p><b>class Code J-P - maintenance view</b></p>	<b>13-000194</b>
<p>Added the specialServiceType attribute to the AllowanceCharge Class to align AllowanceChargeTypeCode list with the UN/ECE 5189 Allowance or Charge Identification Code</p> <p><b>class AllowanceCharge - Maintenance view</b></p> <p>■ Created code list: <a href="#">SpecialServiceTypeCode</a></p>	<b>13-000198</b>


### class Code Q-Z - maintenance view

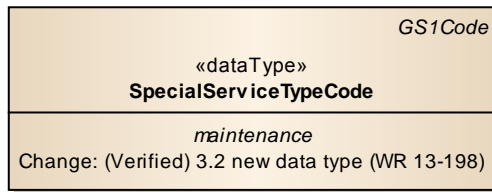

Added association to IndividualAssetIdentification class into the LogisticUnits class in order to include it in the Despatch Advice Logistic Unit

13-000204


### class LogisticUnits - maintenance view

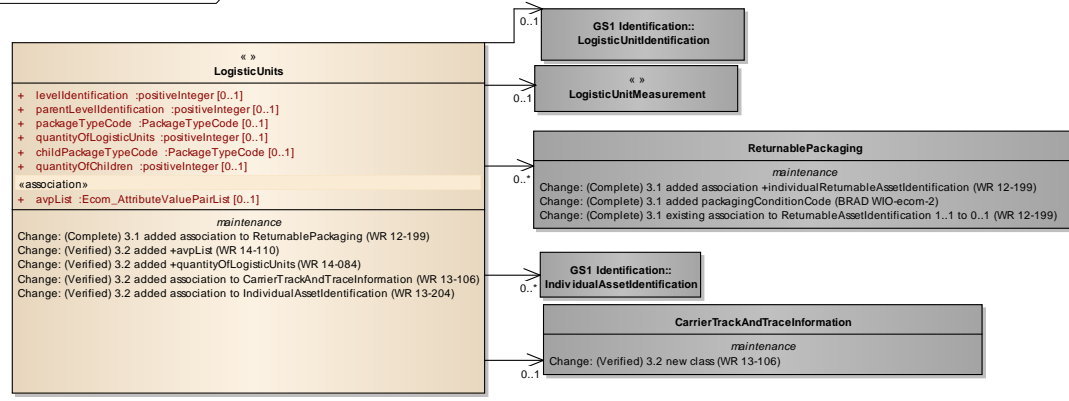

Added itemTypeCode attribute to the TransactionalTradeItem class to enable identification of different types of LineItems


14-000022

### class TransactionalTradeItem - maintenance view

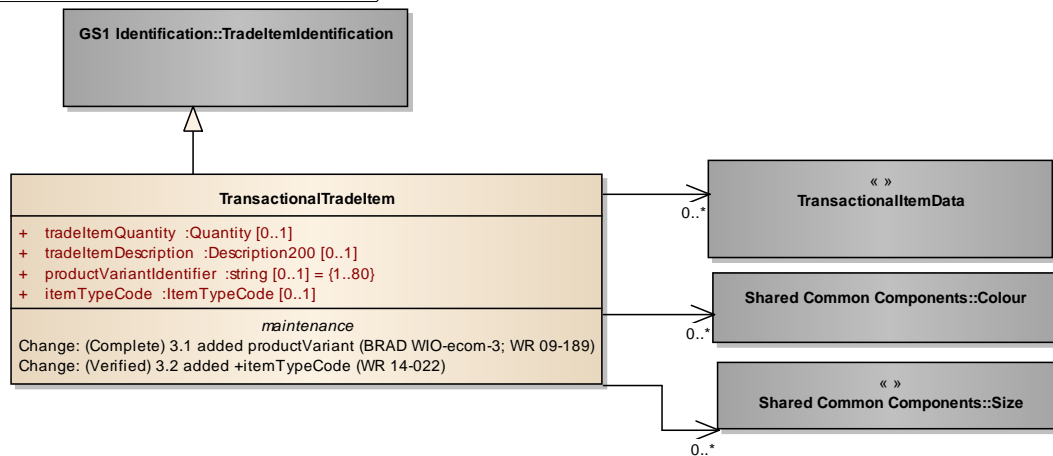

■ Created code list: [ItemTypeCode](#)

### class Code A-I - maintenance view

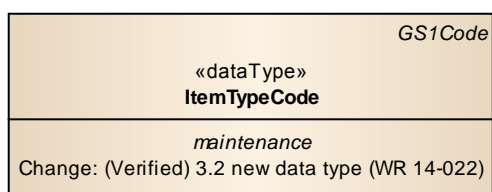




Added two attributes to the ShipmentTransportationInformation class, in order to include them into the Warehouse Outbound Instruction message

- routeID
- transportMeansID (truck ID)


class ShipmentTransportationInformation - maintenance view

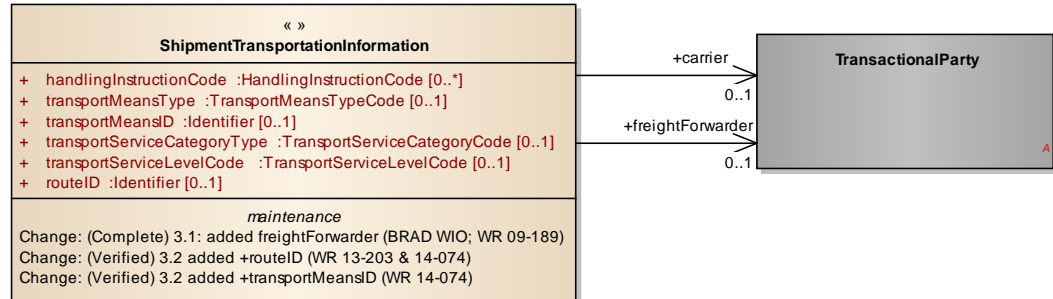

14-000074

Added attribute quantityOfLogisticUnits to the LogisticUnits class to enable identification the package quantity in GS1 XML Receiving Advice message

class LogisticUnits - maintenance view

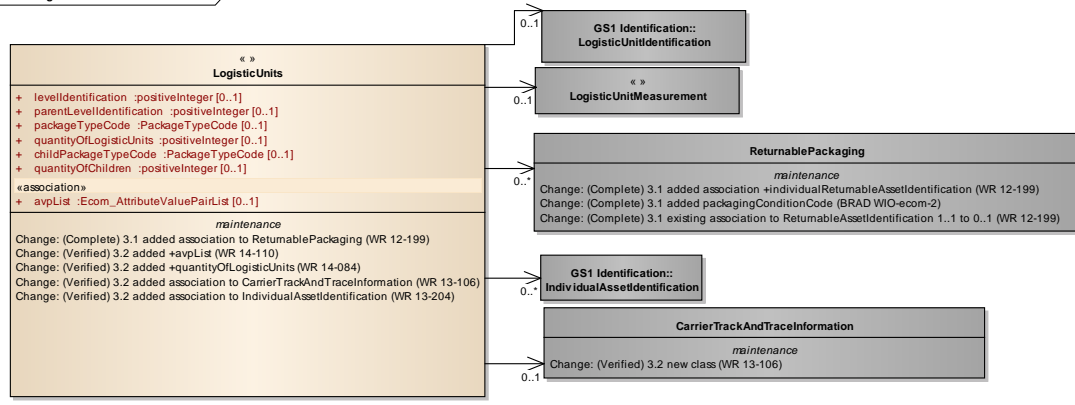


14-000084

Created the following classes





- Ecom\_AttributeValuePairList
- EcomStringAttributeValuePairList
- EcomDocument

to add Attribute Value Pair at the root, line item and sub line item levels


class Ecom\_AttributeValuePairList - maintenance view

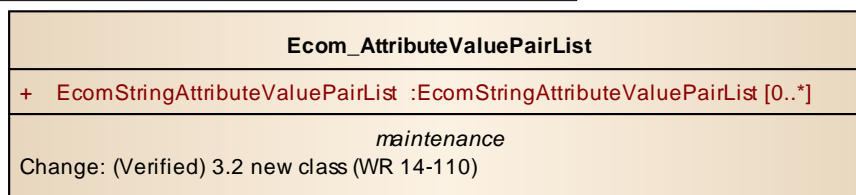

14-000110

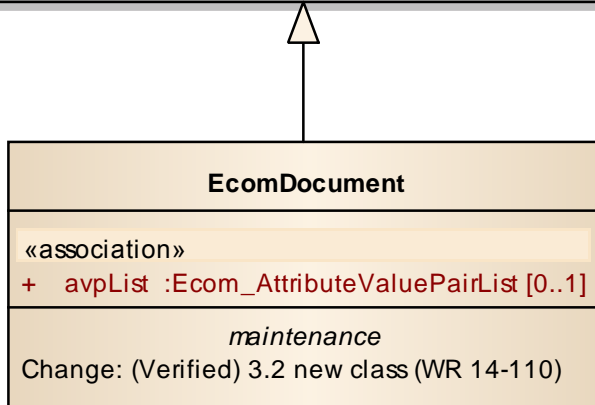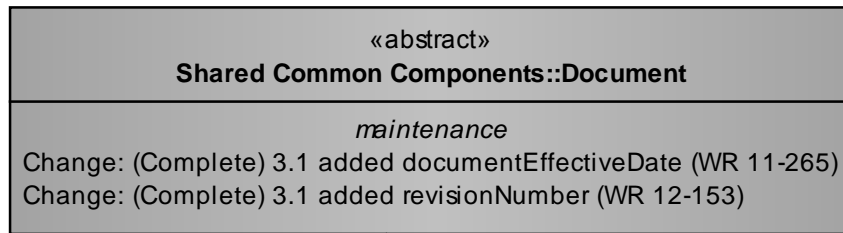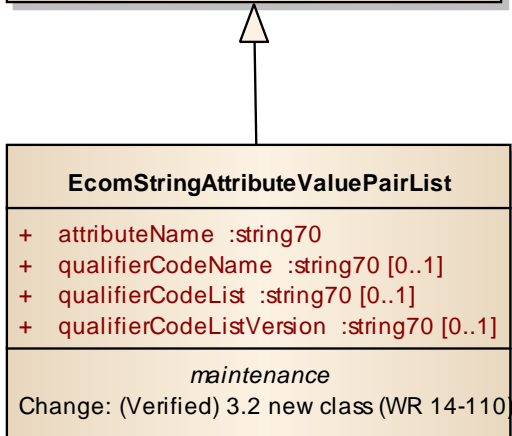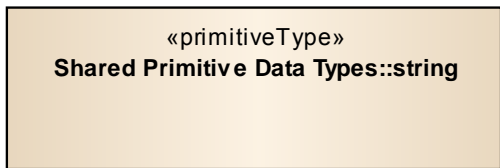**class EcomDocument - maintenance view**

**class EcomStringAttributeValuePairList - ...**

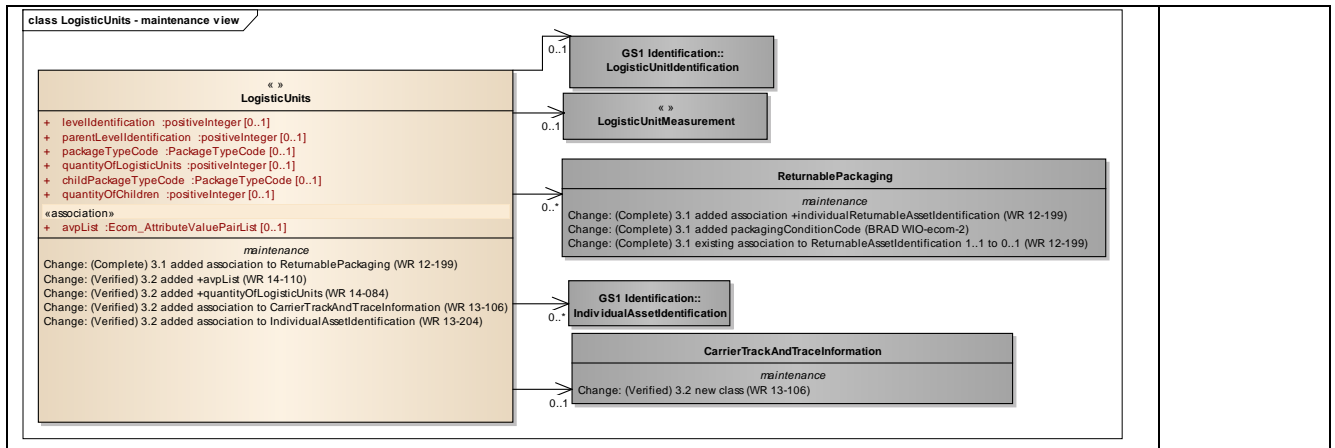
Added eCom\_AttributeValuePairList attribute to the LogisticUnits class, in order to include it in all the messages using this class.







## 7.4 BMS Release 3.3

Change	Associated WR
<ul style="list-style-type: none"> <li>Created Ecom_TradeItemIdentification class and changed association from the previous TradeItemIdentification</li> <li>Created Ecom_PartyIdentification class and changed association from the previous PartyIdentification</li> </ul> <p>class CollaborativeTradeItem - maintenance view</p> <p>CollaborativeTradeItem</p> <p>Change: (New) 3.3 added role name +tradeItemIdentification to associated Ecom_TradeItemIdentification for backward compatibility (WR 15-314)</p> <p>Change: (New) 3.3 changed associations from PartyIdentification to Ecom_PartyIdentification (WR 15-314)</p> <p>Change: (New) 3.3 changed associations from TradeItemIdentification to Ecom_TradeItemIdentification (WR 15-314)</p> <p>+tradeItemIdentification</p> <p>1..1</p> <p>+buyerLocation</p> <p>1..1</p> <p>+sellerLocation</p> <p>1..1</p> <p>eCom GS1 Identification::Ecom_TradeItemIdentification</p> <p>Change: (New) 3.3 New class (WR 15-314)</p> <p>eCom GS1 Identification::Ecom_PartyIdentification</p> <p>Change: (New) 3.3 New class (WR 15-314)</p>	<b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML
<p>Created Ecom_PartyIdentification class and changed association from the previous PartyIdentification</p> <p>class ConsignmentReference - Maintenance view</p> <p>ConsignmentReference</p> <p>Change: (Complete) 3.2 new class (WR 13-192)</p> <p>Change: (New) 3.3 added role name +consignmentIdentification to Ecom_ConsignmentIdentification association for backward compatibility</p> <p>Change: (New) 3.3 changed association from ConsignmentIdentification to Ecom_ConsignmentIdentification (WR 15-314)</p> <p>Change: (New) 3.3 changed associations from PartyIdentification to Ecom_PartyIdentification (WR 15-314)</p> <p>+consignor</p> <p>0..1</p> <p>+consignee</p> <p>0..1</p> <p>eCom GS1 Identification::Ecom_PartyIdentification</p> <p>Change: (New) 3.3 New class (WR 15-314)</p>	<b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML
<p>Created Ecom_ConsignmentIdentification class and changed association from the previous ConsignmentIdentification</p> <p>class ConsignmentReference - Maintenance view</p> <p>ConsignmentReference</p> <p>Change: (Complete) 3.2 new class (WR 13-192)</p> <p>Change: (New) 3.3 added role name +consignmentIdentification to Ecom_ConsignmentIdentification association for backward compatibility</p> <p>Change: (New) 3.3 changed association from ConsignmentIdentification to Ecom_ConsignmentIdentification (WR 15-314)</p> <p>Change: (New) 3.3 changed associations from PartyIdentification to Ecom_PartyIdentification (WR 15-314)</p> <p>+consignmentIdentification</p> <p>1..1</p> <p>eCom GS1 Identification::Ecom_ConsignmentIdentification</p> <p>Change: (New) 3.3 New class (WR 15-314)</p>	<b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML

Change	Associated WR
<p>Created new class with GS1 Key optional</p> <div data-bbox="159 315 880 562"> <p><b>class Ecom GS1 Identification - maintenance view</b></p> <div> <p><b>Ecom_ConsignentIdentification</b></p> <p>+ ginc :GINC [0..1]</p> <p>+ additionalConsignentIdentification :AdditionalConsignentIdentification [0..*]</p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> </div>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created Ecom_EntityIdentification class and changed association from the previous EntityIdentification</p> <div data-bbox="159 645 729 1133"> <p><b>class Ecom_DocumentReference - maintenance view</b></p> <div> <div> <p><b>eCom GS1 Identification:: Ecom_EntityIdentification</b></p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> <div> <p><b>Ecom_DocumentReference</b></p> <p>+ creationDateTime :dateTime [0..1]</p> <p>+ revisionNumber :positiveInteger [0..1]</p> <p>+ lineNumber :positiveInteger [0..1]</p> <p>+ referencedDocumentUrl :anyURI [0..1] = {1..2000}</p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 added +referencedDocumentUrl (WR 16-261)</p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> </div> </div>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created new class with GS1 Key optional</p> <div data-bbox="159 1189 1031 1424"> <p><b>class eCom_EntityIdentification - maintenance view</b></p> <div> <div> <p><b>Ecom_EntityIdentification</b></p> <p>+ entityIdentification :string = {1..80}</p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> <div> <p><b>Ecom_PartyIdentification</b></p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> </div> <p>+contentOwner 0..1</p> </div>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created new class with GS1 Key optional</p> <div data-bbox="159 1480 911 1727"> <p><b>class Ecom GS1 Identification - maintenance view</b></p> <div> <p><b>Ecom_IndividualAssetIdentification</b></p> <p>+ giai :GIAI [0..1]</p> <p>+ additionalIndividualAssetIdentification :AdditionalIndividualAssetIdentification [0..*]</p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p> </div> </div>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>

Change	Associated WR
<div>Created new class with GS1 Key optional</div> <div><div><div>class Ecom GS1 Identification - maintenance view</div><div><div>Ecom_LogisticUnitIdentification</div><div>+ ssc :SSCC [0..1] + additionalLogisticUnitIdentification :AdditionalLogisticUnitIdentification [0..*]</div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div>	<div>15-000314</div> <div>Make GS1 identification keys optional in GS1 EDI XML</div>
<div>Created new class with GS1 Key optional</div> <div><div><div>class Ecom GS1 Identification - maintenance view</div><div><div>Ecom_PartyIdentification</div><div>+ gln :GLN [0..1] + additionalPartyIdentification :AdditionalPartyIdentification [0..*]</div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div>	<div>15-000314</div> <div>Make GS1 identification keys optional in GS1 EDI XML</div>
<div>Created new class with GS1 Key optional</div> <div><div><div>class Ecom GS1 Identification - maintenance view</div><div><div>Ecom_ReturnableAssetIdentification</div><div>+ grai :GRAI [0..1] - additionalReturnableAssetIdentification :AdditionalReturnableAssetIdentification [0..*]</div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div>	<div>15-000314</div> <div>Make GS1 identification keys optional in GS1 EDI XML</div>
<div>Created new class with GS1 Key optional</div> <div><div><div>class Ecom GS1 Identification - maintenance view</div><div><div>Ecom_ReturnableAssetIdentification</div><div>+ grai :GRAI [0..1] - additionalReturnableAssetIdentification :AdditionalReturnableAssetIdentification [0..*]</div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div>	<div>15-000314</div> <div>Make GS1 identification keys optional in GS1 EDI XML</div>
<div>Created new class with GS1 Key optional</div> <div><div><div>class Ecom GS1 Identification - maintenance view</div><div><div>Ecom_ShipmentIdentification</div><div>+ gsin :GSIN [0..1] + additionalShipmentIdentification :AdditionalShipmentIdentification [0..*]</div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div>	<div>15-000314</div> <div>Make GS1 identification keys optional in GS1 EDI XML</div>





Change	Associated WR
<p>Created new class with GS1 Key optional</p> <pre> class Ecom GS1 Identification - maintenance view     class Ecom_TradeItemIdentification         + gtin :GTIN [0..1]         + additionalTradeItemIdentification :AdditionalTradeItemIdentification [0..*]         maintenance         Change: (New) 3.3 New class (WR 15-314)     </pre>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created EndCustomerRelatedDetails class</p> <pre> class EndCustomerRelatedDetails - maintenance view     class EndCustomerRelatedDetails         + deliveryMethod :DeliveryMethodCode [0..1]         «association»         + avpList :Ecom_AttributeValuePairList [0..*]         maintenance         Change: (New) 3.3 new class (WR 15-282, 16-093, 16-306)     end class     class TransactionalParty         Ecom_PartyIdentification         maintenance         Change: (New) 3.3 added association to avpList (WR 16-340)         Change: (New) 3.3 Added generalisation to eComPartyIdentification, removed +gtin and +additionalPartyIdentification (WR 15-314)     end class     EndCustomerRelatedDetails "0..1" -- "+ultimateCustomer" TransactionalParty </pre>	<p><b>15-000282 &amp; 16-000306</b></p> <p>Add add deliveryMethod Code</p> <p><b>16-000093</b></p> <p>Add reference to ultimate customer</p>
<p>Created new class</p> <pre> class EnergyQuantityCalculationConditions - main...     class EnergyQuantityCalculationConditions         + countedMeasurandFactor :int [01..1]         + standardConditionConversion :decimal [0..1]         + calorificValue :decimal [0..1]         maintenance         Change: (New) 3.3 new class (WR 16-051)     end class </pre>	<p><b>16-000051</b></p> <p>Add information for energy price calculation in Invoice</p>
<p>Created new class</p> <pre> class IncidentCircumstances - maintenance view     class IncidentCircumstances         + complaintID :string [0..1] = {1..200}         + circumstanceDescription :Description5000 [0..*]         «association»         + avpList :Ecom_AttributeValuePairList [0..*]         maintenance         Change: (New) 3.3 new class (WR 16-252)     end class </pre>	<p><b>16-000252</b></p> <p>Add details of bank notes ink stain</p>
<p>Created new class</p> <pre> class IncidentDetails - maintenance view     class IncidentDetails         + incidentDateTime :dateTime         + depositDateTime :dateTime         + incidentDetectedDuringBankNoteRecycling :boolean         + incidentDetected :String500 [0..1]         «association»         + avpList :Ecom_AttributeValuePairList [0..*]         maintenance         Change: (New) 3.3 new class (WR 16-251)     end class     class TransactionalParty         Ecom_PartyIdentification         maintenance         Change: (New) 3.3 added association to avpList (WR 16-340)         Change: (New) 3.3 Added generalisation to eComPartyIdentification, removed +gtin and +additionalPartyIdentification (WR 15-314)     end class     IncidentDetails "1" -- "+incidentLocation" TransactionalParty </pre>	<p><b>16-000251</b></p> <p>Add details of incident detection</p>

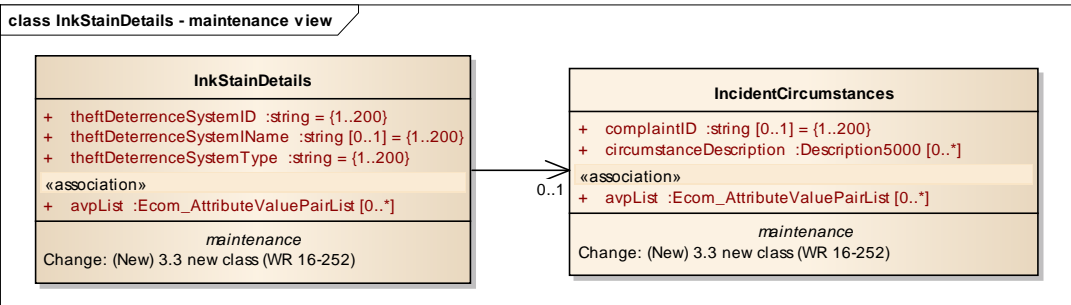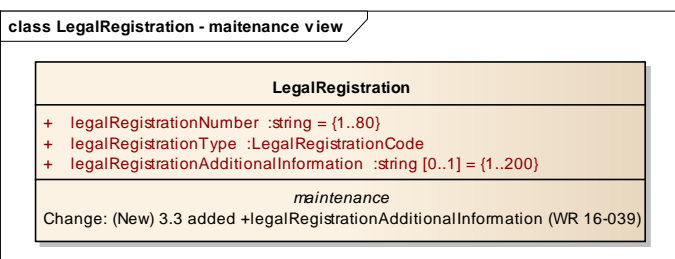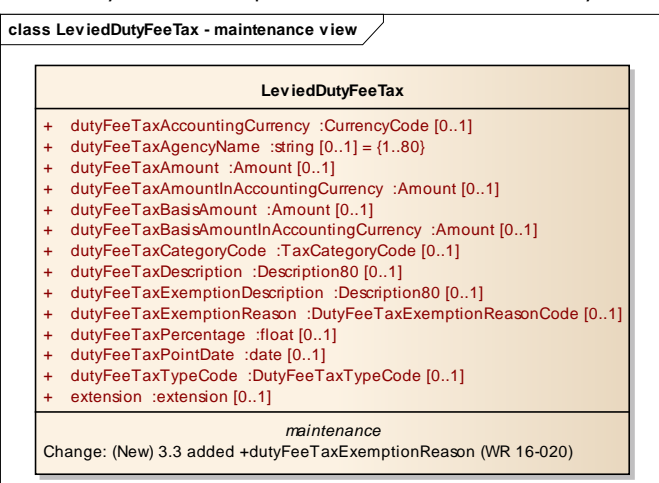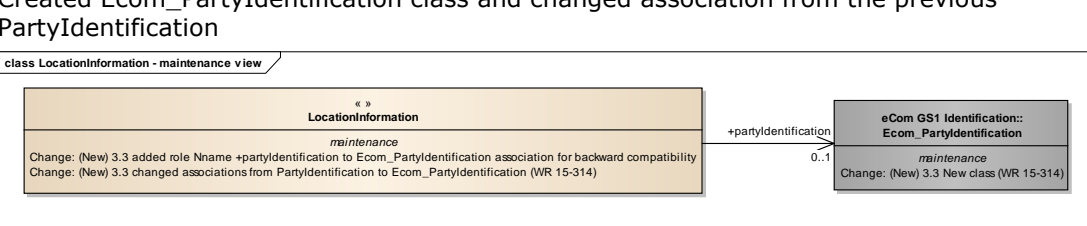Change	Associated WR
<p>Created new class</p> <p><b>class InkStainDetails - maintenance view</b></p>  <p><b>InkStainDetails</b></p> <ul style="list-style-type: none"> <li>+ theftDeterrenceSystemID :string = {1..200}</li> <li>+ theftDeterrenceSystemName :string [0..1] = {1..200}</li> <li>+ theftDeterrenceSystemType :string = {1..200}</li> <li>«association»</li> <li>+ avpList :Ecom_AttributeValuePairList [0..*]</li> </ul> <p><i>maintenance</i></p> <p>Change: (New) 3.3 new class (WR 16-252)</p> <p><b>IncidentCircumstances</b></p> <ul style="list-style-type: none"> <li>+ complaintID :string [0..1] = {1..200}</li> <li>+ circumstanceDescription :Description5000 [0..*]</li> <li>«association»</li> <li>+ avpList :Ecom_AttributeValuePairList [0..*]</li> </ul> <p><i>maintenance</i></p> <p>Change: (New) 3.3 new class (WR 16-252)</p>	<p><b>16-000252</b></p> <p>Add details of bank notes ink stain</p>
<p>Added legalRegistrationAdditionalInformation attribute</p> <p><b>class LegalRegistration - maintenance view</b></p>  <p><b>LegalRegistration</b></p> <ul style="list-style-type: none"> <li>+ legalRegistrationNumber :string = {1..80}</li> <li>+ legalRegistrationType :LegalRegistrationCode</li> <li>+ legalRegistrationAdditionalInformation :string [0..1] = {1..200}</li> </ul> <p><i>maintenance</i></p> <p>Change: (New) 3.3 added +legalRegistrationAdditionalInformation (WR 16-039)</p>	<p><b>16-000039</b></p> <p>Add legal registration information of the seller</p>
<p>Added dutyFeeTaxExemptionReasonCode to LeviedDutyFeeTax class</p> <p><b>class LeviedDutyFeeTax - maintenance view</b></p>  <p><b>LeviedDutyFeeTax</b></p> <ul style="list-style-type: none"> <li>+ dutyFeeTaxAccountingCurrency :CurrencyCode [0..1]</li> <li>+ dutyFeeTaxAgencyName :string [0..1] = {1..80}</li> <li>+ dutyFeeTaxAmount :Amount [0..1]</li> <li>+ dutyFeeTaxAmountInAccountingCurrency :Amount [0..1]</li> <li>+ dutyFeeTaxBasisAmount :Amount [0..1]</li> <li>+ dutyFeeTaxBasisAmountInAccountingCurrency :Amount [0..1]</li> <li>+ dutyFeeTaxCategoryCode :TaxCategoryCode [0..1]</li> <li>+ dutyFeeTaxDescription :Description80 [0..1]</li> <li>+ dutyFeeTaxExemptionDescription :Description80 [0..1]</li> <li>+ dutyFeeTaxExemptionReason :DutyFeeTaxExemptionReasonCode [0..1]</li> <li>+ dutyFeeTaxPercentage :float [0..1]</li> <li>+ dutyFeeTaxPointDate :date [0..1]</li> <li>+ dutyFeeTaxTypeCode :DutyFeeTaxTypeCode [0..1]</li> <li>+ extension :extension [0..1]</li> </ul> <p><i>maintenance</i></p> <p>Change: (New) 3.3 added +dutyFeeTaxExemptionReason (WR 16-020)</p>	<p><b>16-000020</b></p> <p>Add intra community delivery qualifier</p>
<p>Created Ecom_PartyIdentification class and changed association from the previous PartyIdentification</p> <p><b>class LocationInformation - maintenance view</b></p>  <p><b>LocationInformation</b></p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 added role Nname +partyIdentification to Ecom_PartyIdentification association for backward compatibility</p> <p>Change: (New) 3.3 changed associations from PartyIdentification to Ecom_PartyIdentification (WR 15-314)</p> <p><b>eCom GS1 Identification:: Ecom_PartyIdentification</b></p> <p><i>maintenance</i></p> <p>Change: (New) 3.3 New class (WR 15-314)</p>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>

Change	Associated WR							
<div>Created Ecom_TradeItemIdentification class and changed association from the previous TradeItemIdentification</div> <div><div>class LogisticService - Maintenance View</div><div><div><div>LogisticService</div><div><div>+ logisticServiceRequirementCode :LogisticServiceRequirementCode</div><div>+ cashOnDeliveryAmount :Amount [0..1]</div><div>+ insuranceValue :Amount [0..1]</div><div>+ logisticServiceChargeAmount :Amount [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 / Post POC1: added cashOnDeliveryPayer and cashOnDeliveryBillTo</div><div>Change: (New) 3.3 added association to Ecom_TradeItemIdentification named +logisticServiceRequirementID (WR 15-100)</div></div></div></div><div><div>+logisticServiceRequirementID</div><div>0..1</div><div><div>eCom GS1 Identification::Ecom_TradeItemIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr> <tr><td><div>Created Ecom_DocumentReference class and changed generalisation from the previous DocumentReference</div><div><div>class LogisticServiceReference - Maintenance view</div><div><div><div>Ecom_EntityIdentification</div><div><div>Ecom_DocumentReference</div><div><div>maintenance</div><div>Change: (New) 3.3 added +referencedDocumentUrl (WR 16-261)</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div></div><div><div>LogisticServiceReference</div><div><div>+ logisticServiceReferenceTypeCode :LogisticServiceReferenceTypeCode</div><div><div>maintenance</div><div>Change: (Complete) 3.2 new class (WR 13-192)</div><div>Change: (New) 3.3 changed generalisation from DocumentReference to Ecom_DocumentReference (WR 15-314)</div></div></div></div></div><tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr><tr><td><div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div><div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div><tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr></td></tr></td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML	<div>Created Ecom_DocumentReference class and changed generalisation from the previous DocumentReference</div> <div><div>class LogisticServiceReference - Maintenance view</div><div><div><div>Ecom_EntityIdentification</div><div><div>Ecom_DocumentReference</div><div><div>maintenance</div><div>Change: (New) 3.3 added +referencedDocumentUrl (WR 16-261)</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div></div><div><div>LogisticServiceReference</div><div><div>+ logisticServiceReferenceTypeCode :LogisticServiceReferenceTypeCode</div><div><div>maintenance</div><div>Change: (Complete) 3.2 new class (WR 13-192)</div><div>Change: (New) 3.3 changed generalisation from DocumentReference to Ecom_DocumentReference (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr> <tr><td><div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div><div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div><tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr></td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML	<div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div> <div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML
15-000314	Make GS1 identification keys optional in GS1 EDI XML							
<div>Created Ecom_DocumentReference class and changed generalisation from the previous DocumentReference</div> <div><div>class LogisticServiceReference - Maintenance view</div><div><div><div>Ecom_EntityIdentification</div><div><div>Ecom_DocumentReference</div><div><div>maintenance</div><div>Change: (New) 3.3 added +referencedDocumentUrl (WR 16-261)</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div></div><div><div>LogisticServiceReference</div><div><div>+ logisticServiceReferenceTypeCode :LogisticServiceReferenceTypeCode</div><div><div>maintenance</div><div>Change: (Complete) 3.2 new class (WR 13-192)</div><div>Change: (New) 3.3 changed generalisation from DocumentReference to Ecom_DocumentReference (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr> <tr><td><div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div><div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div><tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr></td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML	<div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div> <div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML			
15-000314	Make GS1 identification keys optional in GS1 EDI XML							
<div>Created Ecom_LogisticUnitIdentification class and changed association and generalisation from the previous LogisticUnitIdentification</div> <div><div>class LogisticUnit - maintenance view</div><div><div><div>eCom GS1 Identification::Ecom_LogisticUnitIdentification</div><div><div>maintenance</div><div>Change: (New) 3.3 New class (WR 15-314)</div></div></div></div><div><div>+parentLogisticUnitId</div><div>0..1</div><div><div>LogisticUnit</div><div><div>+ grossWeight :Measurement [0..1]</div><div>+ packageLevelCode :PackageLevelCode [0..1]</div><div>+ packageTypeCode :PackageTypeCode [0..1]</div><div>+ tradeItemQuantity :Quantity [0..1]</div></div><div><div>maintenance</div><div>Change: (Complete) 3.1 added association UnitMeasurement</div><div>Change: (New) 3.3 changed generalisation and association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)</div></div></div></div></div> <tr><td>15-000314</td><td>Make GS1 identification keys optional in GS1 EDI XML</td></tr>	15-000314	Make GS1 identification keys optional in GS1 EDI XML						
15-000314	Make GS1 identification keys optional in GS1 EDI XML							



Change	Associated WR
<p>■ Created Ecom_LogisticUnitIdentification class and changed association from the previous LogisticUnitIdentification and added association name logisticUnitIdentification to preserve backward compatibility</p> <p>■ Created Ecom_IndividualAssetIdentification class and changed association from the previous IndividualAssetIdentification and added association name individualAssetIdentification to preserve backward compatibility</p> <pre> class LogisticUnits - maintenance view     « »     LogisticUnits     + levelIdentification :positiveInteger [0..1]     + parentLevelIdentification :positiveInteger [0..1]     + packageTypeCode :PackageTypeCode [0..1]     + quantityOfLogisticUnits :positiveInteger [0..1]     + childPackageTypeCode :PackageTypeCode [0..1]     + quantityOfChildren :positiveInteger [0..1]     «association»     + avpList :Ecom_AttributeValuePairList [0..1]     maintenance     Change: (Complete) 3.1 added association to ReturnablePackaging (WR 12-199)     Change: (Complete) 3.2 added +avpList (WR 14-110)     Change: (Complete) 3.2 added +quantityOfLogisticUnits (WR 14-084)     Change: (Complete) 3.2 added association to CarrierTrackAndTraceInformation (WR 13-106)     Change: (Complete) 3.2 added association to IndividualAssetIdentification (WR 13-204)     Change: (New) 3.3 added role NName +individualAssetIdentification to Ecom_IndividualAssetIdentification association for backward compatibility     Change: (New) 3.3 added role NName +logisticUnitIdentification to Ecom_LogisticUnitIdentification association for backward compatibility     Change: (New) 3.3 changed association from IndividualAssetIdentification to Ecom_IndividualAssetIdentification (WR 15-314)     Change: (New) 3.3 changed association from LogisticUnitIdentification to Ecom_LogisticUnitIdentification (WR 15-314)      « »     eCom GS1 Identification::Ecom_LogisticUnitIdentification     maintenance     Change: (New) 3.3 New class (WR 15-314)      « »     eCom GS1 Identification::Ecom_IndividualAssetIdentification     maintenance     Change: (New) 3.3 New class (WR 15-314)      « »     CarrierTrackAndTraceInformation     maintenance     Change: (Complete) 3.2 new class (WR 13-106)         </pre>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created Ecom_TradeItemIdentification class and changed association from the previous TradeItemIdentification</p> <pre> class LowerLevelTradeItem - maintenance view     « »     LowerLevelTradeItem     + quantityOfLowerLevelTradeItem :nonNegativeInteger     maintenance     Change: (Complete) 3.2 new class (WR 13-188)     Change: (New) 3.3 changed generalisation from TradeItemIdentification to Ecom_TradeItemIdentification (WR 15-314)      « »     eCom GS1 Identification::Ecom_TradeItemIdentification     maintenance     Change: (New) 3.3 New class (WR 15-314)         </pre>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Added +commodityTypeCode</p> <pre> class OrderLogisticalInformation - maintenance view     « »     OrderLogisticalInformation     + commodityTypeCode :Code [0..1]     maintenance     Change: (New) 3.3 added +commodityTypeCode (WR 15-282)         </pre>	<p><b>15-000282</b></p> <p>Add commodityType with Commodity Code List</p>

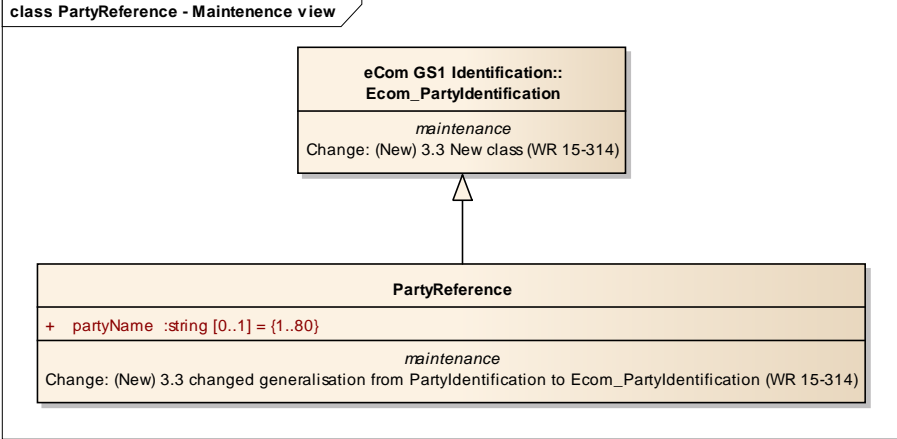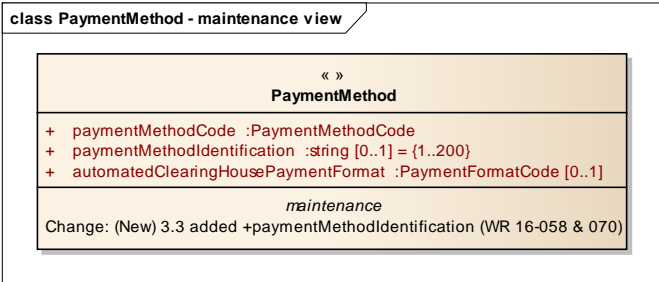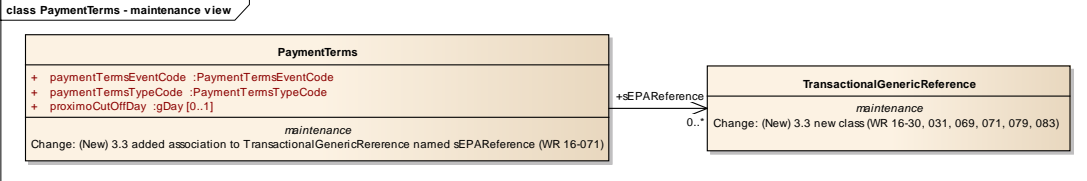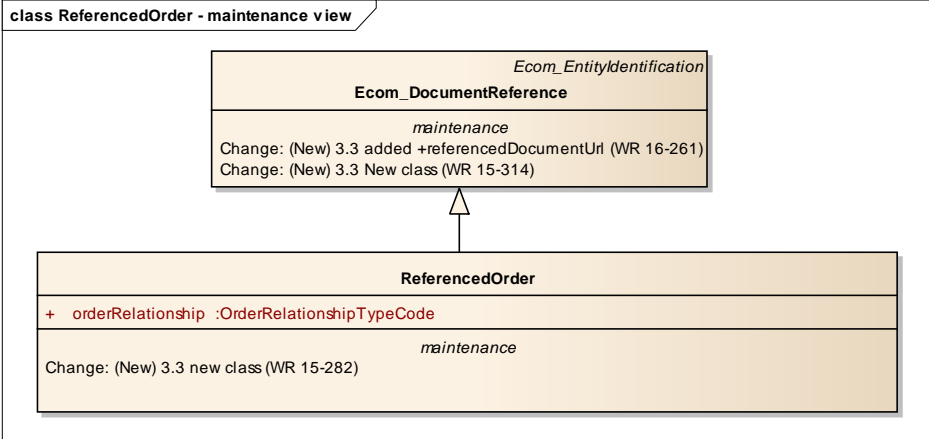Change	Associated WR
<p>Created Ecom_PartyIdentification class and changed generalisation from the previous PartyIdentification</p> <p><b>class PartyReference - Maintenance view</b></p> 	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Added paymentMethodIdentification to PaymentMethod class and Fuel Card value to PaymentMethodCode list</p> <p><b>class PaymentMethod - maintenance view</b></p> 	<p><b>16-000058</b></p> <p>Add fuel card information</p> <p><b>16-000070</b></p> <p>Add card number</p>
<p>Created TransactionalGenericReference class and associated it to the PaymentTerms class</p> <p><b>class PaymentTerms - maintenance view</b></p> 	<p><b>16-000071</b></p> <p>Add mandate reference and the creditor- ID</p>
<p>Created ReferenceOrder class</p> <p><b>class ReferencedOrder - maintenance view</b></p> 	<p><b>15-000282</b></p> <p>Add reference Order element with an order Relationship Code</p>

Change	Associated WR
<p>Created Ecom_ReturnableAssetIdentification class and changed association from the previous ReturnableAssetIdentification</p> <p>class ReturnablePackaging - maintenance view</p>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created Ecom_PartyIdentification class and changed association from the previous PartyIdentification</p> <p>class ShipmentReference - Maintenance view</p>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created Ecom_ShipmentIdentification class and changed association from the previous ShipmentIdentification, added association name shipmentIdentification to preserve backward compatibility</p> <p>class ShipmentReference - Maintenance view</p>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created TradeStatisticClassification class</p> <p>class TradeStatisticClassification - maintenance view</p>	<p><b>16-000021</b></p> <p>Add declaration for export sector statistics or external trade statistics</p> <p><b>16-000022</b></p> <p>Add Intrastat</p>

Change	Associated WR
<div>Created TransactionalGenericReference class</div> <div><div>class TransactionalGenericReference - maintenance view</div><div><div>TransactionalGenericReference</div><div><div>+ transactionalReferenceTypeCode :TransactionalReferenceTypeCode</div><div>+ transactionalReferenceValue :string = {1..200}</div></div><div><div><i>maintenance</i></div><div>Change: (New) 3.3 new class (WR 16-30, 031, 069, 071, 079, 083)</div></div></div></div>	<div><b>16-000030</b></div> <div>Add buyer reference</div> <div><b>16-000031</b></div> <div>Add reference number of an ultimate customer</div> <div><b>16-000069 &amp; 16-000079</b></div> <div>Add seller's reference number</div> <div><b>16-000071</b></div> <div>Add mandate reference and the creditor- ID</div> <div><b>16-000083</b></div> <div>Add suppliers reference number</div>
<div>Created TransactionalItemCertification class</div> <div><div>class TransactionalItemCertification - maintenance view</div><div><div>TransactionalItemCertification</div><div><div>+ itemCertificationAgency :string [0..1] = {1..200}</div><div>+ itemCertificationStandard :string [0..1] = {1..200}</div><div>+ itemCertificationValue :string [0..1] = {1..200}</div></div><div><div><i>maintenance</i></div><div>Change: (New) 3.3 new class (WR 16-032)</div></div></div></div>	<div><b>16-000032</b></div> <div>Add reference that the corresponding item is organic</div>


Change	Associated WR
<p>Added itemInContactWithFoodProduct attribute</p> <div data-bbox="159 336 1109 1108"> <p><b>class TransactionalItemData - maintenance view</b></p> <pre> « » TransactionalItemData + availableForSaleDate :date [0..1] + batchNumber :string [0..1] = {1..80} + bestBeforeDate :date [0..1] + countryOfOrigin :CountryCode [0..1] + itemExpirationDate :date [0..1] + lotNumber :string [0..1] = {1..80} + packagingDate :date [0..1] + productionDate :date [0..1] + productQualityIndication :Quantity [0..1] + sellByDate :date [0..1] + serialNumber :string [0..*] = {1..20} + shelfLife :string [0..1] = {1..80} + tradeItemQuantity :Quantity [0..1] + itemInContactWithFoodProduct :boolean [0..1] «association» + avpList :Ecom_AttributeValuePairList [0..1]  maintenance Change: (New) 3.3 added association to avpList (WR 16-340) Change: (New) 3.3 added association to Dimension named +transactionalItemDimensions (WR 16-033, 075) Change: (New) 3.3 added association to TransactionalItemDataCarrierAndIdentification (WR 16-075) Change: (New) 3.3 added association to TransactionalItemLogisticUnitInformation (WR16-075) Change: (New) 3.3 added association to TransactionalItemOrganicInformation (WR 16-032) Change: (New) 3.3 added association to UnitMeasurement named +transactionalItemVolume (WR 15-282, 16-075) Change: (New) 3.3 added association to WasteDetails named +tradeItemWaste (WR 16-048) Change: (New) 3.3. added +itemInContactWithFoodProduct (WR 16-158) </pre> </div>	<p><b>16-000158</b></p> <p>Add indicator „product contact“</p>

Change	Associated WR
<ul style="list-style-type: none"> <li>■ Added association to UniteMeasurement named transactionalItemVolume (WR 15-282)</li> <li>■ Added association to TransactionalItemOrganicInformation class (WR 16-032)</li> <li>■ Added association to TradeItemWaste class (WR 16-048)</li> <li>■ Added repeatable association to Dimension class named TransactionalItemDimensions (WR 16-075)</li> <li>■ Added repeatable association to TransactionalItemDataCarrierAndIdentification class (WR 16-075)</li> <li>■ Added repeatable association to LogisticUnitInformation class (WR 16-075)</li> <li>■ Added itemInContactWithFoodProduct attribute (WR16-158)</li> </ul> <div data-bbox="156 663 1257 1249"> <p>class TransactionalItemData - maintenance view</p> <pre> classDiagram     class TransactionalItemData {         +availableForSaleDate :date [0..1]         +batchNumber :string [0..1] = {1..80}         +bestBeforeDate :date [0..1]         +countryOfOrigin :CountryCode [0..1]         +itemExpirationDate :date [0..1]         +lotNumber :string [0..1] = {1..80}         +packagingDate :date [0..1]         +productionDate :date [0..1]         +productQualityIndication :Quantity [0..1]         +sellByDate :date [0..1]         +serialNumber :string [0..1] = {1..20}         +shelfLife :string [0..1] = {1..80}         +tradeItemQuantity :Quantity [0..1]         +itemInContactWithFoodProduct :boolean [0..1]     }     class UnitMeasurement {         &lt;&lt;abstract&gt;&gt;     }     class SharedCommonComponentsStringRange {         &lt;&lt;abstract&gt;&gt;     }     class SharedCommonComponentsDimension {         &lt;&lt;abstract&gt;&gt;     }     class TransactionalItemLogisticUnitInformation {         maintenance     }     class TransactionalItemDataCarrierAndIdentification {         maintenance     }     class WasteDetails {         maintenance     }     class TransactionalItemOrganicInformation {         maintenance     }      TransactionalItemData --&gt; "0..*" UnitMeasurement : +transactionalItemWeight     TransactionalItemData --&gt; "0..*" UnitMeasurement : +transactionalItemVolume     TransactionalItemData --&gt; "0..*" SharedCommonComponentsStringRange : +serialNumberRange     TransactionalItemData --&gt; "0..*" SharedCommonComponentsDimension : +transactionalItemDimensions     TransactionalItemData --&gt; "0..1" TransactionalItemLogisticUnitInformation : +transactionalItemLogisticUnitInformation     TransactionalItemData --&gt; "0..1" TransactionalItemDataCarrierAndIdentification : +transactionalItemDataCarrierAndIdentification     TransactionalItemData --&gt; "0..*" WasteDetails : +tradeItemWaste     TransactionalItemData --&gt; "0..1" TransactionalItemOrganicInformation : +transactionalItemOrganicInformation         </pre> <p>Change: (New) 3.3 added association to avpList (WR 16-340)  Change: (New) 3.3 added association to Dimension named +transactionalItemDimensions (WR 16-075)  Change: (New) 3.3 added association to TransactionalItemDataCarrierAndIdentification (WR 16-075)  Change: (New) 3.3 added association to TransactionalItemLogisticUnitInformation (WR 16-075)  Change: (New) 3.3 added association to TransactionalItemOrganicInformation (WR 16-032)  Change: (New) 3.3 added association to UnitMeasurement named +transactionalItemVolume (WR 15-282, 16-075)  Change: (New) 3.3 added association to WasteDetails named +tradeItemWaste (WR 16-048)  Change: (New) 3.3 added +itemInContactWithFoodProduct (WR 16-158)</p> </div>	<p><b>15-000282</b> Add item volume information</p> <p><b>16-000032</b> Add a reference that the corresponding item is organic</p> <p><b>16-000048</b> Add type of waste</p> <p><b>16-000075</b> Add item packaging information</p> <p><b>16-000158</b> Add indicator "product contact"</p>
<p>Created TransactionalItemDataCarrierAndIdentification class</p> <div data-bbox="156 1323 858 1570"> <p>class TransactionalItemDataCarrierAndIdentification - maintenance view</p> <pre> classDiagram     class TransactionalItemDataCarrierAndIdentification {         +gs1TransactionalItemIdentificationKey :GS1ItemIdentificationKeyCode [0..1]         +dataCarrier :DataCarrierTypeCode [0..1]     }     </pre> <p>Change: (New) 3.3 new class (WR 16-075)</p> </div>	<p><b>16-000075</b> Add item packaging information</p>
<p>Created TransactionalItemLogisticUnitInformation class</p> <div data-bbox="156 1644 1257 1951"> <p>class TransactionalItemLogisticUnitInformation - maintenance view</p> <pre> classDiagram     class TransactionalItemLogisticUnitInformation {         +numberOfLayers :positiveInteger [0..1]         +numberOfUnitsPerLayer :positiveInteger [0..1]         +numberOfUnitsPerPallet :positiveInteger [0..1]         +packagingTerms :PackagingTermsCode [0..1]         +packageTypeCode :PackageTypeCode [0..1]         +maximumStackingFactor :nonNegativeInteger         +returnablePackageTransportCostPayment :TransportChargesPaymentMethodCode [0..1]     }     class SharedCommonComponentsDimension {         &lt;&lt;abstract&gt;&gt;     }      TransactionalItemLogisticUnitInformation --&gt; "0..*" SharedCommonComponentsDimension : +dimensionsOfLogisticUnit     </pre> <p>Change: (New) 3.3 new class (WR16-075)</p> </div>	<p><b>16-000075</b> Add item packaging information</p>

Change	Associated WR
<p>Created TransactionalItemOrganicInformation class</p> <pre> class TransactionalItemOrganicInformation - maintenance view     class TransactionalItemOrganicInformation         + isTradelItemOrganic :boolean         maintenance         Change: (New) 3.3 new class (WR 16-032)     class TransactionalItemCertification         + itemCertificationAgency :string [0..1] = {1..200}         + itemCertificationStandard :string [0..1] = {1..200}         + itemCertificationValue :string [0..1] = {1..200}         maintenance         Change: (New) 3.3 new class (WR 16-032)     TransactionalItemOrganicInformation --&gt; TransactionalItemCertification : +organicCertification 0..1         </pre>	<p><b>16-000032</b></p> <p>Add a reference that the corresponding item is organic</p>
<ul style="list-style-type: none"> <li>Created Ecom_PartyIdentification class and changed association from the previous PartyIdentification</li> <li>Added association to avPList</li> </ul> <pre> class TransactionalParty - maintenance view     class eCom GS1 Identification::Ecom_PartyIdentification         maintenance         Change: (New) 3.3 New class (WR 15-314)     class TransactionalParty         «association»         + avPList :Ecom_AttributeValuePairList [0..1]         maintenance         Change: (New) 3.3 added association to avPList (WR 16-340)         Change: (New) 3.3 Added generalisation to eComPartyIdentification, removed +gln and +additionalPartyIdentification (WR 15-314)     eCom GS1 Identification::Ecom_PartyIdentification &lt; -- TransactionalParty         </pre>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p> <p><b>16-000340</b></p> <p>Add AVP placeholder</p>
<p>Created Ecom_DocumentReference class and changed generalisation from the previous DocumentReference</p> <pre> class TransactionalReference - Maintenance view     class Ecom_EntityIdentification         class Ecom_DocumentReference             maintenance             Change: (New) 3.3 added +referencedDocumentUrl (WR 16-261)             Change: (New) 3.3 New class (WR 15-314)     class TransactionalReference         + transactionalReferenceTypeCode :TransactionalReferenceTypeCode         maintenance         Change: (New) 3.3 changed generalisation from DocumentReference to Ecom_DocumentReference (WR 15-314)     Ecom_EntityIdentification &lt; -- Ecom_DocumentReference     TransactionalReference &lt; -- Ecom_DocumentReference         </pre>	<p><b>15-000314</b></p> <p>Make GS1 identification keys optional in GS1 EDI XML</p>

Change	Associated WR
<ul style="list-style-type: none"> <li>Created Ecom_TradeItemIdentification class and changed association from the previous TradeItemIdentification (WR 15-314)</li> <li>Added tradeItemDataOwner attribute (WR 15-238)</li> <li>Added association to TradeItemClassification class (WRs 16-046 &amp; 47)</li> <li>Added butterFatReference attribute (WR 16-059)</li> <li>Added association to avPList (WR 16-340)</li> </ul>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p> <p><b>15-000238</b> Add attributes specifying the different ownership of Trade Item data</p> <p><b>16-000046</b> Add national product classification</p> <p><b>16-000047</b> Add GPC brick</p> <p><b>16-000059</b> Add surcharge number for butter</p> <p><b>16-000340</b> Add AVP placeholder</p>
<p>class TransactionalTradeItem - maintenance view</p>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p>
<ul style="list-style-type: none"> <li>Created Ecom_ReturnableAssetIdentification class and changed association from the previous ReturnableAssetIdentification</li> <li>Created Ecom_IndividualAssetIdentification class and changed association from the previous IndividualAssetIdentification and added association name individualAssetIdentification to preserve backward compatibility</li> </ul>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p>
<p>class TransportEquipment - maintenance view</p>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p>
<p>Created Ecom_DocumentReference class and changed generalisation from the previous DocumentReference</p>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p>
<p>class TransportReference - Maintenance view</p>	<p><b>15-000314</b> Make GS1 identification keys optional in GS1 EDI XML</p>

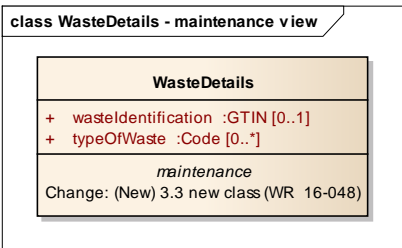

Change	Associated WR
<p>Created WasteDetails class</p> 	<p><b>16-000048</b></p> <p>Add type of waste</p>

## 8 Appendices

Not Applicable

## 9 Acknowledgements

### 9.1.1 Work Group

Function	Name	Company / organisation
Co-chair	Rossner (Pottier), Natascha	GS1 France
Co-chair	Schmidt, Tom Eric	August Storck KG
Member	Bemrose, Jonathan	R&R Ice Cream
Member	Bodemer, Petra	dm-drogerie markt GmbH + Co. KG
Member	Boikanyo, Rebone	GS1 South Africa / Consumer Goods Council of South Africa
Member	Canada, ON	M3B 3L1
Member	Carlson, Jim	General Mills, Inc.
Member	Chresta, Richard	GS1 Switzerland
Member	Cook, Don	Wal-Mart Stores, Inc.
Member	Cox, Marc	Philips Electronics N.V.
Member	Darnell, David	Systrends
Member	De Flou, Nele	GS1 Belgium & Luxembourg
Member	Dicks, Arne	GS1 Germany
Member	Duvinger, Karina	GS1 Sweden
Member	Foerderer, Klaus	GS1 Germany
Member	Gathmann, Stefan	GS1 Ireland
Member	Grangard, Anders	GS1 Global Office
Member	Harpell, Eileen	GS1 Community Room Staff
Member	Hand, Phil	JDA Software
Member	Herregodts, Kurt	GS1 Belgium & Luxembourg
Member	Kempkes, Fred	Unilever N.V.
Member	Kernan, Brendan	GS1 Ireland
Member	Kidd, Robin	Nestle

Function	Name	Company / organisation
Member	Krid, Anne-Claire	GS1 France
Member	Lanoue, Tom	General Mills, Inc.
Member	Laur, Rita	GS1 Canada
Member	Lenman, Mia	GS1 Sweden
Member	Lerch, Hanjoerg	METRO Group
Member	Moberg, Dale	Axway
Member	Montes de Oca, Alejandra	GS1 Mexico
Member	Ng, Ella	GS1 Australia
Member	Peelen, Esther	GS1 Netherlands
Member	Pelekies, Andreas	GS1 Germany
Member	Perrier, Patricia	GS1 France
Member	Przybilla, Christian	GS1 Germany
Member	Pujol, Xavier	GS1 Spain
Member	Racek, Greg	Wal-Mart Stores, Inc.
Member	Repetto, Mirko	GS1 Italy
Member	Robba, Steven	1WorldSync Holdings, Inc.
Member	Rosell, Pere	GS1 Spain
Member	Rosenberg, Steven	GS1 US
Member	Schmid, Sue	GS1 Australia
Member	Schneider, Christian	GS1 Switzerland
Member	Sehorz, Eugen	GS1 Austria
Member	Sharma, Vishal	General Mills, Inc.
Member	Shimazaki, Ayako	GS1 Japan
Member	Sion, Emilie	GS1 France
Member	Souza, Nadia	GS1 Brasil
Member	Strand, Roman	GS1 Germany
Member	Tan, Milton	GS1 Malaysia
Member	Tompsett, Simon	Waitrose
Member	Trelle, Ute	1WorldSync Holdings, Inc.
Member	Tse, Steve	GS1 Hong Kong
Member	Tyson, Betty	Knouse Foods Cooperative, Inc
Member	Van den Bergh, Senne	GS1 Belgium & Luxembourg
Member	Van der Eijk, Pim	OASIS - Sonnenglanz Consulting BV
Member	Veldhuis, Saskia	Procter & Gamble Co.
Member	Welch, Shan	GS1 UK
Member	Westerkamp, Jan	GS1 Netherlands
Member	Wilson, Mary	GS1 US
Member	Windsperger, Bekki	Best Buy Co., Inc.
Member	Yang, Shaopeng	GS1 China
Member	Yusdiar, Dani	GS1 Indonesia
Member	Zwanziger, Greg	SUPERVALU

### 9.1.2 Development Team Members

Function	Name	Organisation
GSMP Process Lead	Jean-Luc Champion	GS1 Global Office
Technical Development Lead	Ewa Iwicka	GS1 Global Office
Peer Review	Mark Van Eeghem	GS1 Global Office