

# **EANCOM<sup>®</sup> 2002 S3**

## **PAYMUL**

### **Multiple payment order message**

**Edition 2016 Upd. 2021**

1. Introduction.....	2
2. Message Structure Chart .....	4
3. Branching Diagram.....	6
4. Segments Description .....	17
5. Segments Layout.....	24
6. Example(s) .....	111

## 1. Introduction

---

### Status

MESSAGE TYPE : PAYMUL  
REFERENCE DIRECTORY : D.01B  
EANCOM® SUBSET VERSION : 003

### Definition

A Multiple Payment order is sent by the Ordering Customer (or Payor or Agent on behalf of the Ordering Customer) to the Ordered Bank, to instruct the Ordered Bank to debit one or more accounts it services for the Ordering Customer, and to arrange for the payment of specified amounts to several Beneficiaries (or Payees) in settlement of the referenced business transaction(s).

Throughout this document, the term 'Ordering Customer' refers to either an Ordering Customer, or a Payor or Agent acting (sending) on behalf of the Ordering Customer; likewise the term 'Beneficiary' refers to either a Beneficiary, or a Payee or Agent acting on behalf of the Beneficiary.

### Principles

- A Multiple Payment Order may cover the financial settlement of one or more commercial trade transactions such as invoices, credit notes, debit notes etc. It is not intended for use in securities trading.
- Charges may be borne on account(s) different of the account(s) held by the Ordering Customer.
- Several debit accounts, execution dates and currencies may be specified.
- The Ordered Bank may need a confirmation/authorisation to be allowed to process the Multiple Payment Order message.
- The only way to modify a Multiple Payment Order message is to cancel the whole message or part thereof (e.g. by the use of the FINCAN message). In that respect, one to many order(s) could be cancelled within the message, avoiding to be obliged to cancel the whole message.

### Notes

This section should be read in conjunction with the branching diagram and the segment table which indicate mandatory, conditional and repeating requirements.

The following semantic principles which apply to the message are intended to facilitate a better understanding of the message:

The Multiple Payment Order message is structured in three levels, A, B, and C.

- Level A contains data related to routing criteria for the whole message and is contained in the heading section, segment group 1 through 3, the CNT segment, group 24, and the UNT segment.
- Level B contains data from the debit side (one debit account, one currency, one execution date) and data which applies to all further details of C level(s) and is contained in segment group 4 through 10.
- Level C contains data related to the credit side, and this data is considered as unique for each payment transaction and is contained in segment group 11 through 23.

The structure of the message is designed to allow several B levels, each B level being followed by its related C levels.

### Using the message for simple, extended, or multiple transactions

The multiple payment order message may be used by an ordering customer to transmit single, extended, or multiple payment orders to its bank.

A **payment order** is an instruction from an ordering customer to its bank ordering that funds be debited from its account and credited to the account of the identified beneficiary.

A simple payment order always relates to **one payment** from **one ordering customer** to **one beneficiary**. To use the PAYMUL message as a simple payment order the following data must be provided;

Data	Where
------	-------

## 1. Introduction

Ordering Customer Data / Beneficiary data	FII - Group 6 / NAD - Group 7 FII - Group 12 / NAD - Group 13
Credit / Debit Values	MOA - Group 5 (DEBIT value) MOA - Group 11 (CREDIT value)
Payment Order Number	RFF - Group 4 (DEBIT side) RFF - Group 11 (CREDIT side)
Payment Data	Group 16 (PRC segment) Group 17 (DOC segment) Group 23 (GIS segment) Remittance data provided in the EANCOM® REMADV message.

An extended payment order always relates to **many payments** from **one ordering customer** to **one beneficiary**. To use the PAYMUL message as an extended payment order the following data must be provided;

Data	Where
Ordering Customer Data / Beneficiary data	FII - Group 6 / NAD - Group 7 FII - Group 12 / NAD - Group 13
Credit / Debit Values	MOA - Group 5 (DEBIT value) MOA - Group 11 (CREDIT value)
Payment Order Number	RFF - Group 4 (DEBIT side) RFF - Group 11 (CREDIT side)
Payment Data	Group 16 (PRC segment) Group 17 (as many segments as required) to identify each payment being made. Group 23 (GIS segment)

A multiple payment order always relates to **many payments** from **one ordering customer** to **many beneficiaries**. The complete structure of the PAYMUL message may be transmitted in order to provide multiple payment orders.

### Remittance data

Included in the multiple payment order message is the functionality to provide detailed remittance data. This data is simply transmitted by the ordering customer's bank to the beneficiary's bank (is not changed by either bank) for ultimate transmission to the beneficiary in the credit advice.

In addition to this facility EANCOM® also includes the trade Remittance Advice message (REMADV). The method to be used to communicate remittance advice data depends on user requirements.

If the user wishes to transmit the remittance information using the EANCOM® REMADV message a link is established between the payment order and the REMADV using the DOC segment in segment group 17.

## 2. Message Structure Chart



UNA	1	C	1	- Service string advice
UNB	2	M	1	- Interchange header

### Multiple Payment Order Heading Section

UNH	3	M	1	- Message header
BGM	4	M	1	- Beginning of message
DTM	5	M	1	- Date/time/period
BUS	6	C	1	- Business function
SG2		C	5	- FII
FII	7	M	1	- Financial institution information
SG3		C	3	- NAD
NAD	8	M	1	- Name and address

### Multiple Payment Order Detail Section - Level B

SG4		M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
LIN	9	M	1	- Line item
DTM	10	C	1	- Date/time/period
RFF	11	C	2	- Reference
BUS	12	C	1	- Business function
FCA	13	C	1	- Financial charges allocation
SG5		C	1	- MOA-CUX-DTM-RFF
MOA	14	M	1	- Monetary amount
CUX	15	C	1	- Currencies
DTM	16	C	2	- Date/time/period
RFF	17	C	1	- Reference
SG6		M	2	- FII
FII	18	M	1	- Financial institution information
SG7		C	3	- NAD-CTA-COM
NAD	19	M	1	- Name and address
CTA	20	C	1	- Contact information
COM	21	C	5	- Communication contact
SG8		C	1	- INP-FTX-DTM
INP	22	M	1	- Parties and instruction
FTX	23	C	1	- Free text
DTM	24	C	2	- Date/time/period
SG9		C	10	- GIS-MOA-LOC-NAD-RCS-FTX
GIS	X 25	M	1	- General indicator
MOA	26	C	1	- Monetary amount
LOC	27	C	2	- Place/location identification
NAD	28	C	1	- Name and address
RCS	29	C	1	- Requirements and conditions
FTX	30	C	10	- Free text
SG10		C	1	- PRC-FTX
PRC	31	M	1	- Process identification
FTX	32	M	1	- Free text

### Multiple Payment Order Detail Section - Level C

SG11		M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
SEQ	33	M	1	- Sequence details
MOA	34	M	1	- Monetary amount
DTM	35	C	1	- Date/time/period
RFF	36	C	3	- Reference
PAI	37	C	1	- Payment instructions
FCA	38	C	1	- Financial charges allocation
SG12		C	3	- FII

## 2. Message Structure Chart




FII	39	M	1	- Financial institution information
SG13		C	3	- NAD-CTA-COM
NAD	40	M	1	- Name and address
CTA	41	C	1	- Contact information
COM	42	C	5	- Communication contact
SG14		C	3	- INP-FTX-DTM
INP	43	M	1	- Parties and instruction
FTX	44	C	1	- Free text
DTM	45	C	2	- Date/time/period
SG15		C	10	- GIS-MOA-LOC-NAD-RCS-FTX
GIS	X 46	M	1	- General indicator
MOA	47	C	1	- Monetary amount
LOC	48	C	2	- Place/location identification
NAD	49	C	1	- Name and address
RCS	50	C	1	- Requirements and conditions
FTX	51	C	10	- Free text
SG16		C	1	- PRC-FTX-SG17-SG23
PRC	52	M	1	- Process identification
FTX	53	C	5	- Free text
SG17		C	9999	- DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
DOC	54	M	1	- Document/message details
MOA	55	C	5	- Monetary amount
DTM	56	C	5	- Date/time/period
RFF	57	C	5	- Reference
NAD	58	C	2	- Name and address
SG18		C	5	- CUX-DTM
CUX	59	M	1	- Currencies
DTM	60	C	1	- Date/time/period
SG19		C	100	- AJT-MOA-RFF
AJT	61	M	1	- Adjustment details
MOA	62	M	1	- Monetary amount
RFF	63	C	1	- Reference
SG20		C	1000	- DLI-MOA-PIA-SG22
DLI	64	M	1	- Document line identification
MOA	65	M	5	- Monetary amount
PIA	66	C	5	- Additional product id
SG22		C	10	- AJT-MOA-RFF
AJT	67	M	1	- Adjustment details
MOA	68	M	1	- Monetary amount
RFF	69	C	1	- Reference
SG23		C	1	- GIS-MOA
GIS	X 70	M	1	- General indicator
MOA	71	C	5	- Monetary amount

### Multiple Payment Order Summary Section


CNT	72	C	5	- Control total
SG24		C	5	- AUT-DTM
AUT	73	M	1	- Authentication result
DTM	74	C	1	- Date/time/period
UNT	75	M	1	- Message trailer
UNZ	76	M	1	- Interchange trailer

3. Branching Diagram


---

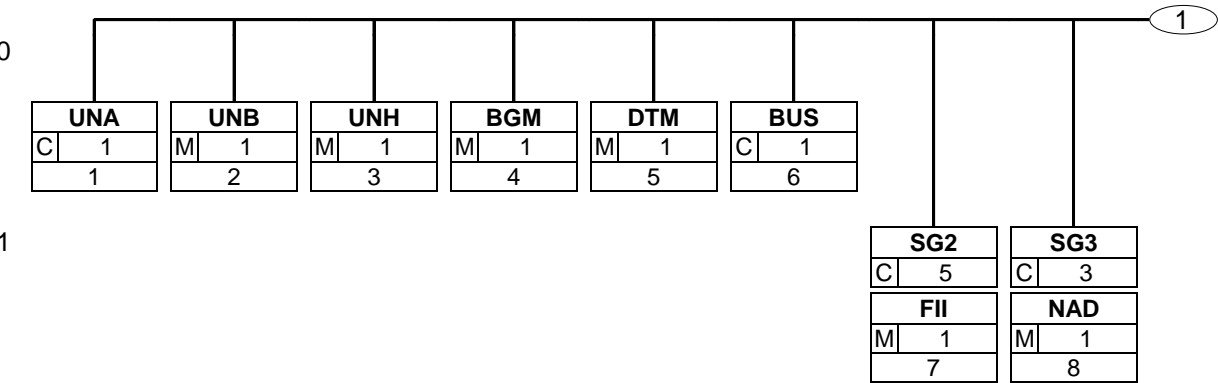

3. Branching Diagram

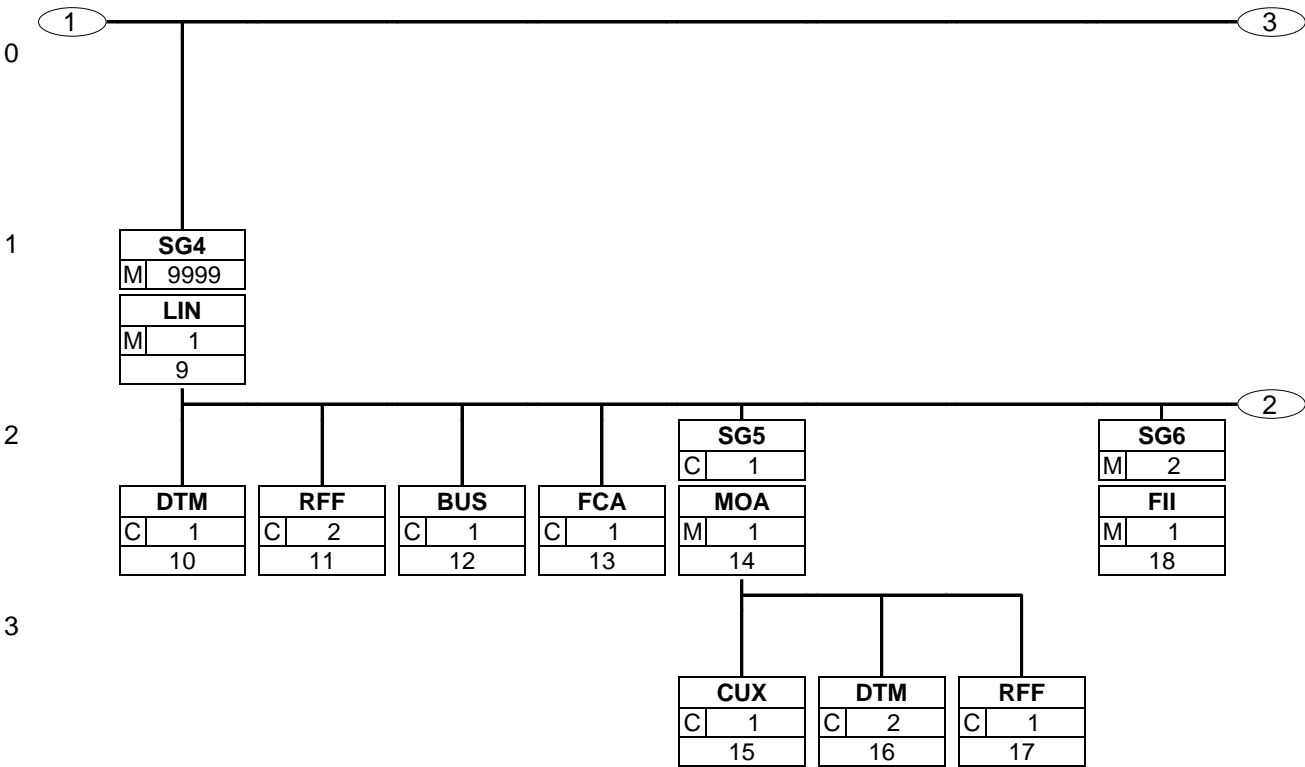


3. Branching Diagram

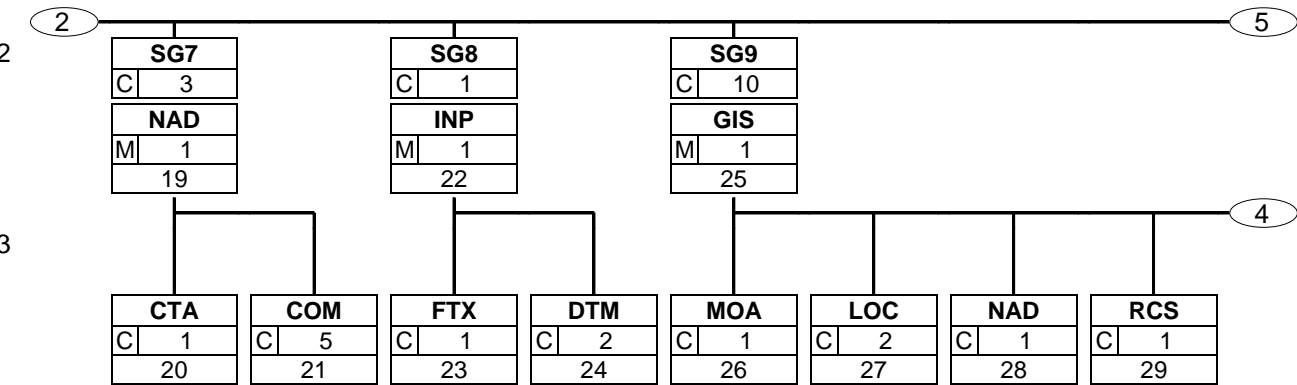




3. Branching Diagram

---




3. Branching Diagram

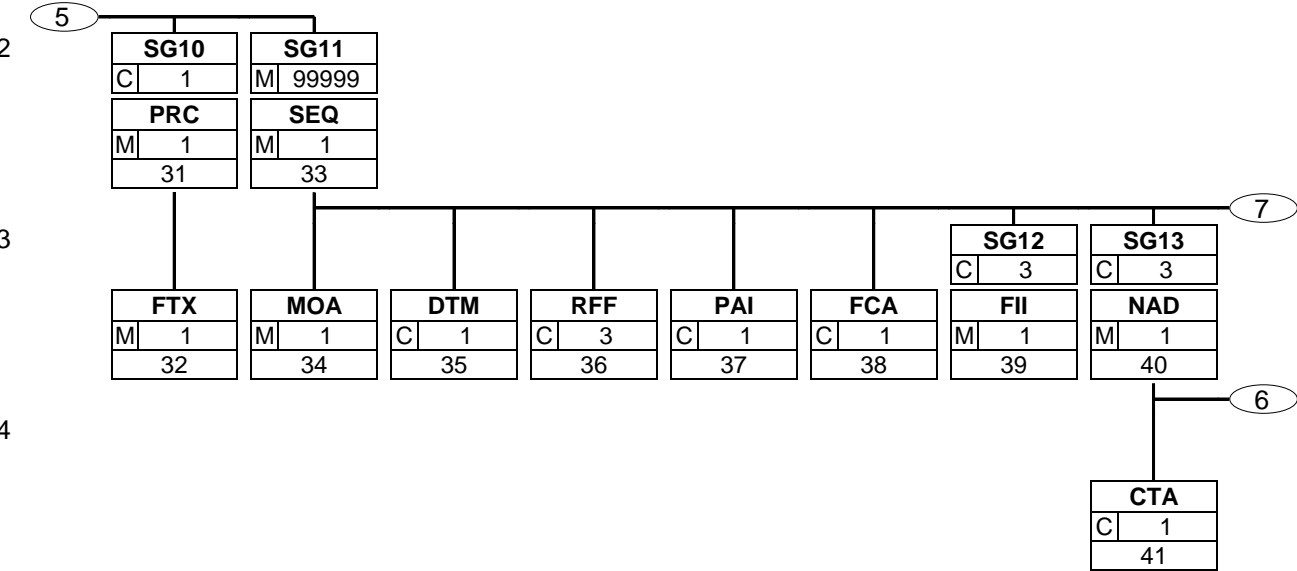


3. Branching Diagram

---




3. Branching Diagram

---

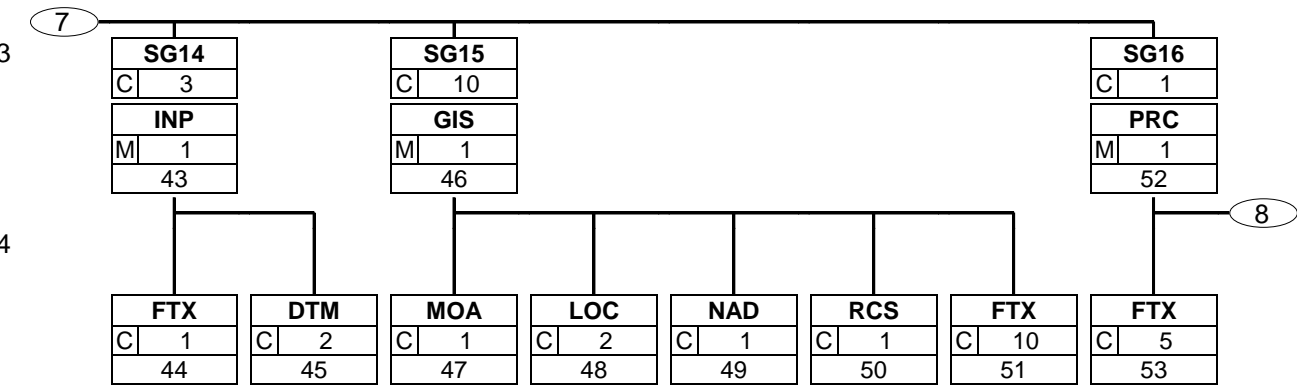


3. Branching Diagram

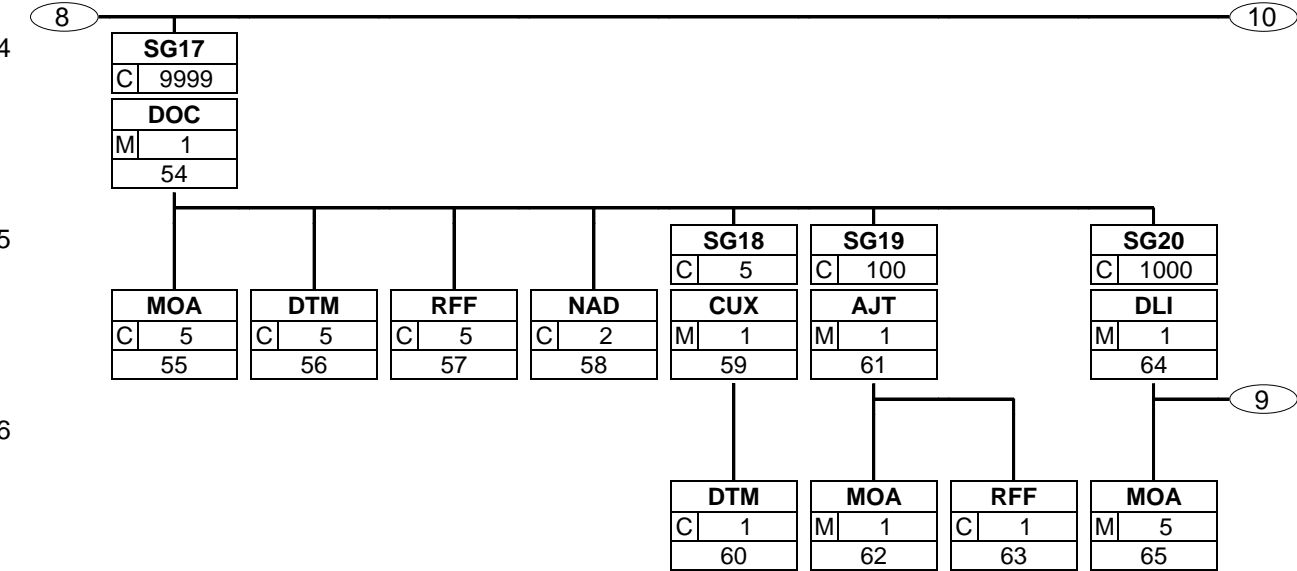


3. Branching Diagram

---

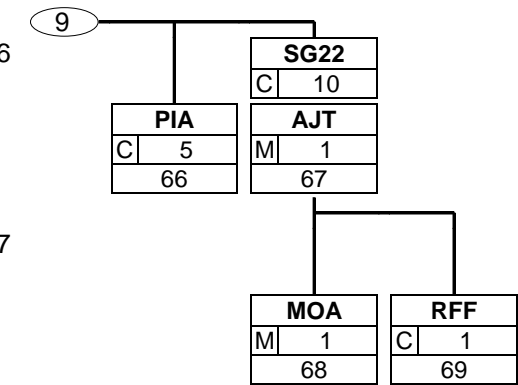


### 3. Branching Diagram

---

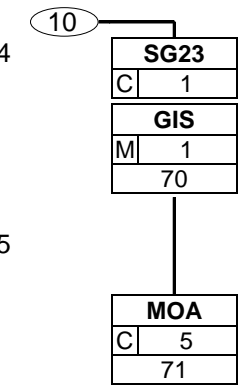

3. Branching Diagram

---

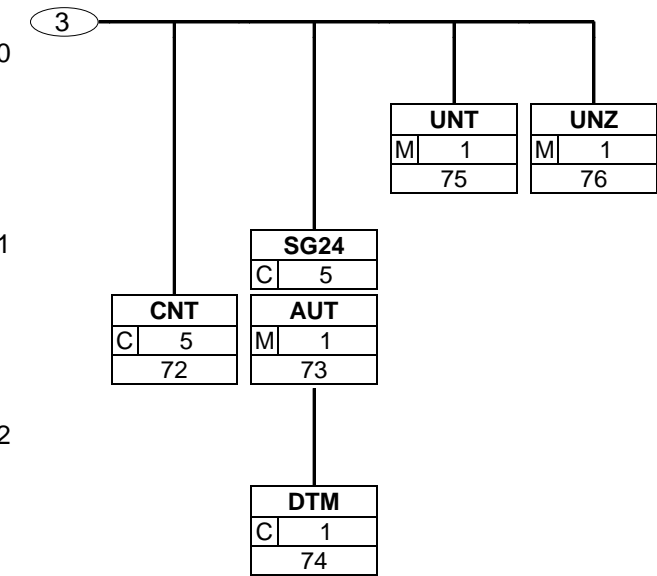



#### 4. Segments Description

---

- UNA - C 1 - Service string advice  
The service string advice shall begin with the upper case characters UNA immediately followed by six characters in the order shown below. The same character shall not be used in more than one position of the UNA.
- UNB - M 1 - Interchange header  
This segment is used to envelope the interchange, as well as to identify both, the party to whom the interchange is sent and the party who has sent the interchange. The principle of the UNB segment is the same as a physical envelope which covers one or more letters or documents, and which details, both the address where delivery is to take place and the address from where the envelope has come.

##### Multiple Payment Order Heading Section

- UNH - M 1 - Message header  
This segment is used to head, identify and specify a message.
- BGM - M 1 - Beginning of message  
All references other than the document number DE 1004 should be put in the RFF segment.
- DTM - M 1 - Date/time/period  
This segment is used to specify the date on which the Multiple Payment Order message was created.
- BUS - C 1 - Business function  
This segment is used to indicate whether all of the payments contained in the message are Domestic, European, or International.
- SG2** - C 5 - **FII**  
A group of segments identifying the financial institutions involved in the multiple payment order.
- FII - M 1 - Financial institution information  
This segment is used to identify the receiving financial institution of the multiple payment order message.
- SG3** - C 3 - **NAD**  
A group of segments identifying the ordering party, which is valid for all payment orders.
- NAD - M 1 - Name and address  
This segment is used to identify the sender of the multiple payment order message.

##### Multiple Payment Order Detail Section - Level B

- SG4** - M 9999 - **LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11**  
This segment group contains information regarding the debit side of this transaction and details which are pertinent to all payments specified in the message. Certain payment details may be provided either in segment group 4 or in segment group 11, but not in both.
- LIN - M 1 - Line item  
This segment is used to identify a line within the multiple payment order by means of a incrementing unique line number.
- DTM - C 1 - Date/time/period  
This segment is used to specify the requested execution date for the debit instruction contained in the multiple payment order.

#### 4. Segments Description

---

RFF - C 2	- Reference	This segment is used to identify the reference number of the debit instruction. This number, along with the message number detailed in data element 1004 in the BGM segment, are passed back to the ordering customer in the debit advice (and multiple debit advice), banking status, and financial messages.
BUS - C 1	- Business function	This segment is used to identify the characteristics of the payment orders detailed in level C of the message. The contents of this segment will be transferred unchanged to the beneficiary of the multiple payment order.
FCA - C 1	- Financial charges allocation	This segment is used to identify the party on which any charges are allocated and the account (of the ordering customer) to which the charges should be directed.
<b>SG5</b> - C 1	- <b>MOA-CUX-DTM-RFF</b>	A group of segments containing the currency of the single amounts in level C, currency to be transferred, plus the total of all single amounts of level C.
MOA - M 1	- Monetary amount	This segment is used to specify the payment amount for the debit instruction.
CUX - C 1	- Currencies	This segment is used to specify the currency of the monetary amount detailed in the previous MOA segment. The CUX segment is only used if code 57 (Equivalent amount) has been used in data element 5025 of the previous MOA segment. The currency information is required only by the ordering customer and its bank.
DTM - C 2	- Date/time/period	This segment is used to specify reference and rate of exchange dates.
RFF - C 1	- Reference	This segment is used to provide references to other transactions negotiated between the ordering customer and the ordered bank which will be used to finance the multiple payment order, e.g. a separate foreign exchange deal.
<b>SG6</b> - M 2	- <b>FII</b>	A group of segments containing the account servicing bank including the account to be debited. If the ordering party is not quoted separately in the NAD-segment on level-B or level-A, then this group also contains the information of the ordering party.
FII - M 1	- Financial institution information	This segment is used to identify the financial institution and account information related to the ordering customer (payor) for the debit instruction.
<b>SG7</b> - C 3	- <b>NAD-CTA-COM</b>	A group of segments identifying the ordering party mutually exclusive with NAD-segment on level-A for the ordering party (Ordering customer and payor). Furthermore, one contact party can also be quoted in this group.
NAD - M 1	- Name and address	This segment is used to identify the ordering customer for the debit instruction.
CTA - C 1	- Contact information	This segment is used to provide contact details relevant for the party identified in the previous NAD segment.
COM - C 5	- Communication contact	This segment is used to provide communications details relevant to the contact identified in the CTA segment.
<b>SG8</b> - C 1	- <b>INP-FTX-DTM</b>	A group of segments containing instructions from the ordering customer relating to parties identified in the NAD and FII segments.

#### 4. Segments Description

---

INP - M 1	- Parties and instruction This segment is used to identify the party who must carry out an instruction from the ordering customer, and the party to whom the instruction is intended.
FTX - C 1	- Free text This segment is used to provide additional coded or free text instructions to those provided in the INP segment.
DTM - C 2	- Date/time/period This segment is used to specify the earliest and latest dates by which the instructions must be carried out.
SG9 - C 10	- <b>GIS-MOA-LOC-NAD-RCS-FTX</b> A group of segments providing information for subsequent use by regulatory authorities requiring statistical and other types of data.
GIS - M 1	- General indicator This segment is used to indicate that the information contained in the following segments will be passed on to and processed by the central and regulatory party identified in the NAD segment.
MOA - C 1	- Monetary amount This segment is used to specify monetary amounts which must be reported to the regulatory party identified in the NAD segment.
LOC - C 2	- Place/location identification This segment is used to indicate any locations relevant to the regulatory party identified in the NAD segment.
NAD - C 1	- Name and address This segment is used to identify the central and regulatory authority specifying the regulatory information detailed in the GIS and FTX segments.
RCS - C 1	- Requirements and conditions This segment is used to indicate any requirements and conditions related to the transaction which is being reported to the regulatory authorities.
FTX - C 10	- Free text This segment is used to provide free or coded text information required by the regulatory authorities. The form and content of this segment is dependent upon the central bank or regulatory authority's requirements.
SG10 - C 1	- <b>PRC-FTX</b> A group of segments - mutually exclusive with level -C- containing the details of payment, which are determined for all payments on level C.
PRC - M 1	- Process identification This segment is used to provide processing information for each beneficiary of the debit instructions.
FTX - M 1	- Free text This segment is used to provide free or coded text information related to the processing of the payment.

##### Multiple Payment Order Detail Section - Level C

SG11 - M 99999	- <b>SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16</b> This segment group contains information regarding the Beneficiaries of the payments. Certain payment details may be provided either in segment group 11 or in segment group 4, but not in both.
----------------	--

#### 4. Segments Description

---

SEQ - M 1	- Sequence details This segment is used to identify the start of the credit side of the transaction (level C) by means of a sequence number within the current line number. The sequence number should be reset to one for each occurrence of a new line number (in LIN segment).
MOA - M 1	- Monetary amount This segment is used to specify the payment amount for the credit instruction.
DTM - C 1	- Date/time/period This segment is used to specify dates relevant to the beneficiary's side of the credit instruction.
RFF - C 3	- Reference This segment is used to identify any references related to the payment order.
PAI - C 1	- Payment instructions This segment is used to specify the method of payment and the payment channel to be used. It is recommended that this segment is only used if no previous agreements are in place between trading partners, or the ordering customer/ account holder and its bank.
FCA - C 1	- Financial charges allocation This segment is used to identify the basis on which any charges are allocated and the account (of the ordering customer) to which the charges should be directed.
<b>SG12</b> - C 3	- <b>FII</b> A group of segments containing the beneficiary's bank and the account and if necessary up to two intermediary banks.
FII - M 1	- Financial institution information This segment is used to identify the financial institution and account number of the beneficiary.
<b>SG13</b> - C 3	- <b>NAD-CTA-COM</b> A group of segments identifying the name and address of the beneficiary and one contact party.
NAD - M 1	- Name and address This segment is used to identify the beneficiary of the credit instruction and is passed on unchanged through the banking chain.
CTA - C 1	- Contact information This segment is used to provide contact details relevant for the party identified in the previous NAD segment.
COM - C 5	- Communication contact This segment is used to provide communications details relevant to the contact identified in the CTA segment.
<b>SG14</b> - C 3	- <b>INP-FTX-DTM</b> A group of segments containing instructions from the ordering customer relating to parties identified in the NAD and FII segments. It specifies action to be taken by the identified parties and the date (and optionally time) by which such action needs to be taken.
INP - M 1	- Parties and instruction This segment is used to identify the party who must carry out an instruction from the ordering customer, and the party to whom the instruction is intended.
FTX - C 1	- Free text This segment is used to provide additional coded or free text instructions to those provided in the INP segment.

#### 4. Segments Description

---

DTM - C 2	- Date/time/period This segment is used to specify the earliest and latest dates by which the instructions must be carried out.
<b>SG15 - C 10</b>	- <b>GIS-MOA-LOC-NAD-RCS-FTX</b> A group of segments providing information for subsequent use by regulatory authorities requiring statistical and other types of data. It also identifies the regulatory authority for which the information is intended followed by the information itself.
GIS - M 1	- General indicator This segment is used to indicate that the information contained in the following segments will be passed on to and processed by the central and regulatory party identified in the NAD segment.
MOA - C 1	- Monetary amount This segment is used to specify monetary amounts which must be reported to the regulatory party identified in the NAD segment.
LOC - C 2	- Place/location identification This segment is used to indicate any locations relevant to the regulatory party identified in the NAD segment.
NAD - C 1	- Name and address This segment is used to identify the central and regulatory authority specifying the regulatory information detailed in the GIS and FTX segments.
RCS - C 1	- Requirements and conditions This segment is used to indicate any requirements and conditions related to the transaction which is being reported to the regulatory authorities.
FTX - C 10	- Free text This segment is used to provide free or coded text information required by the regulatory authorities. The form and content of this segment is dependent upon the central bank or regulatory authority's requirements.
<b>SG16 - C 1</b>	- <b>PRC-FTX-SG17-SG23</b> A group of segments containing the details of payment.
PRC - M 1	- Process identification This segment is used to provide processing information related to the credit instruction.
FTX - C 5	- Free text This segment is used to provide free or coded text information related to the processing of the payment.
<b>SG17 - C 9999</b>	- <b>DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20</b> A group of segments providing details of all documents, e.g., invoices, statements, despatch advices, etc..., to which the Multiple Payment Order refers. It includes information on the monetary amounts for each document and on any adjustments (with an indication of the reason for adjustments) and discounts.
DOC - M 1	- Document/message details This segment is used to provide details of the documents, e.g. a group of invoices, to which the multiple payment order refers.
MOA - C 5	- Monetary amount This segment is used to specify monetary amounts related to the complete document identified in the previous DOC segment.
DTM - C 5	- Date/time/period This segment is used to specify dates related to the document identified in the DOC segment.

#### 4. Segments Description

---

RFF - C 5	- Reference This segment is used to provide any additional references relevant to the currently identified DOC segment.
NAD - C 2	- Name and address This segment is used to identify any additional parties related to the currently identified document, e.g. delivery party.
<b>SG18 - C 5</b>	- <b>CUX-DTM</b> A group of segments specifying the currencies and the related dates/periods valid to the referenced document where different to the reference currency.
CUX - M 1	- Currencies This segment is used to provide currency rate of exchange information used to convert amounts specified in the MOA segment for the referenced document, to an amount expressed in terms of the remittance/payment currency. This CUX segment will only be used when the currency of its rate of exchange is different from the default global currency or its rate of exchange specified in the CUX segment at heading level.
DTM - C 1	- Date/time/period This segment is used to specify any dates related to the currency information specified in the previous CUX segment.
<b>SG19 - C 100</b>	- <b>AJT-MOA-RFF</b> A group of segments indicating adjustment amounts and their referenced documents.
AJT - M 1	- Adjustment details This segment is used to indicate the reason for an adjustment to the current document.
MOA - M 1	- Monetary amount This segment is used to indicate the value of the adjusted amount for the current document.
RFF - C 1	- Reference This segment is used to specify any references associated with the adjusted amounts.
<b>SG20 - C 1000</b>	- <b>DLI-MOA-PIA-SG22</b> A group of segments which may be used when required to provide details of individual line items in the reference document.
DLI - M 1	- Document line identification This segment is used to identify individual line items within the document identified in the DOC segment.
MOA - M 5	- Monetary amount This segment is used to indicate the line item amount and the amount remitted for the line item identified in the DLI segment for the current document.
PIA - C 5	- Additional product id This segment is used to provide the product identification of the line item detailed in the DLI segment for the current document.
<b>SG22 - C 10</b>	- <b>AJT-MOA-RFF</b> A group of segments indicating adjustment amounts and their referenced documents for this line item.
AJT - M 1	- Adjustment details This segment is used to indicate the reason for an adjustment to the current line identified in the DLI segment.

## 4. Segments Description

---

MOA - M 1	- Monetary amount This segment is used to indicate the value of the adjusted amount for the current line item.
RFF - C 1	- Reference This segment is used to specify any references associated with the adjustment amounts for the current line item.
<b>SG23 - C 1</b>	- <b>GIS-MOA</b> A group of segments indicating the end of the details of payment and specifying hash total amounts for control purposes.
GIS - M 1	- General indicator This segment is used to indicate the end of the detail of payment.
MOA - C 5	- Monetary amount This segment is used to indicate the total value level C for control purposes. The figure detailed here is simply an accumulation of the values specified in all MOA segments in level C regardless of the qualifiers used in DE 5025.

### Multiple Payment Order Summary Section

CNT - C 5	- Control total This segment is used to provide application data for message control purposes.
<b>SG24 - C 5</b>	- <b>AUT-DTM</b> A group of segments specifying the details of any authentication (validation) procedure applied to the PAYMUL message.
AUT - M 1	- Authentication result This segment is used to provide details of any authentication procedures which have been applied to the multiple payment order. The use of this segment is, including any algorithms and calculation procedures, dependent on bilaterally agreed conditions between the message sender and receiver.
DTM - C 1	- Date/time/period This segment is used to provide details related to the date and where necessary, the time, of the multiple payment order validation.
UNT - M 1	- Message trailer The UNT segment is a mandatory UN/EDIFACT segment. It must always be the last segment in the message.
UNZ - M 1	- Interchange trailer This segment is used to provide the trailer of an interchange.

## 5. Segments Layout

This section describes each segment used in the EANCOM® Multiple payment order message. The original EDIFACT segment layout is listed. The appropriate comments relevant to the EANCOM® subset are indicated.

### Notes:

1. The segments are presented in the sequence in which they appear in the message. The segment or segment group tag is followed by the (M)andatory / (C)onditional indicator, the maximum number of occurrences and the segment description.

2. Reading from left to right, in column one, the data element tags and descriptions are shown, followed by in the second column the EDIFACT status (M or C), the field format, and the picture of the data elements. These first pieces of information constitute the original EDIFACT segment layout.

Following the EDIFACT information, EANCOM® specific information is provided in the third, fourth, and fifth columns. In the third column a status indicator for the use of (C)onditional EDIFACT data elements (see 2.1 through 2.3 below), in the fourth column the restricted indicator (see point 3 on the following page), and in the fifth column notes and code values used for specific data elements in the message.

2.1 (M)andatory data elements in EDIFACT segments retain their status in EANCOM®.

2.2 Additionally, there are five types of status for data elements with a (C)onditional EDIFACT status, whether for simple, component or composite data elements. These are listed below and can be identified when relevant by the following abbreviations:

- REQUIRED	<b>R</b>	Indicates that the entity is required and must be sent.
- ADVISED	<b>A</b>	Indicates that the entity is advised or recommended.
- DEPENDENT	<b>D</b>	Indicates that the entity must be sent in certain conditions, as defined by the relevant explanatory note.
- OPTIONAL	<b>O</b>	Indicates that the entity is optional and may be sent at the discretion of the user.
- NOT USED	<b>N</b>	Indicates that the entity is not used and should be omitted.

2.3 If a composite is flagged as **N, NOT USED**, all data elements within that composite will have blank status indicators assigned to them.

3. Status indicators detailed in the fourth column which directly relate to the code values detailed in the fifth **column** may have two values:

- RESTRICTED	<b>*</b>	A data element marked with an asterisk (*) in the fourth column indicates that the listed codes in column five are the only codes available for use with this data element, in this segment, in this message.
- OPEN		All data elements where coded representation of data is possible and a restricted set of code values is not indicated are open (no asterisk in fourth column). The available codes are listed in the EANCOM® Data Elements and Code Sets Directory. Code values may be given as examples or there may be a note on the format or type of code to be used.

4. Different colours are used for the code values in the segment details: restricted codes are in red and open codes in blue.



## 5. Segments Layout

Segment number: 1

<b>UNA</b> - C 1 - Service string advice				
Function: To define the characters selected for use as delimiters and indicators in the rest of the interchange that follows.				
	EDIFACT	GS1	*	Description
UNA1 Component data element separator	M an1	<b>M</b>	*	Used as a separator between component data elements contained within a composite data element (default value: ":")
UNA2 Data element separator	M an1	<b>M</b>	*	Used to separate two simple or composite data elements (default value: "+" )
UNA3 Decimal notation	M an1	<b>M</b>	*	Used to indicate the character used for decimal notation (default value: ".")
UNA4 Release indicator	M an1	<b>M</b>	*	Used to restore any service character to its original specification (value: "?").
UNA5 Reserved for future use	M an1	<b>M</b>	*	(default value: space )
UNA6 Segment terminator	M an1	<b>M</b>	*	Used to indicate the end of segment data (default value: "' '")
<p>Segment Notes:</p> <p>The service string advice shall begin with the upper case characters UNA immediately followed by six characters in the order shown below. The same character shall not be used in more than one position of the UNA.</p> <p>This segment is used to inform the receiver of the interchange that a set of service string characters which are different to the default characters are being used.</p> <p>When using the default set of service characters, the UNA segment need not be sent. If it is sent, it must immediately precede the UNB segment and contain the four service string characters (positions UNA1, UNA2, UNA4 and UNA6) selected by the interchange sender.</p> <p>Regardless of whether or not all of the service string characters are being changed every data element within this segment must be filled, (i.e., if some default values are being used with user defined ones, both the default and user defined values must be specified).</p> <p>When expressing the service string characters in the UNA segment, it is not necessary to include any element separators.</p> <p>The use of the UNA segment is required when using a character set other than level A.</p> <p>UNA:+.? '</p>				

## 5. Segments Layout

Segment number: 2

UNB - M 1 - Interchange header				
Function: To start, identify and specify an interchange.				
	EDIFACT	GS1	*	Description
S001 SYNTAX IDENTIFIER	M	M		See Part I chapter 5.2.7 and segment notes.
0001 Syntax identifier	M a4	M	*	UNOA = UN/ECE level A UNOB = UN/ECE level B UNOC = UN/ECE level C UNOD = UN/ECE level D UNOE = UN/ECE level E UNOF = UN/ECE level F
0002 Syntax version number	M n1	M	*	3 = Version 3
S002 INTERCHANGE SENDER	M	M		
0004 Sender identification	M an..35	M		GLN (n13)
0007 Partner identification code qualifier	C an..4	R	*	14 = GS1
0008 Address for reverse routing	C an..14	O		
S003 INTERCHANGE RECIPIENT	M	M		
0010 Recipient identification	M an..35	M		GLN (n13)
0007 Partner identification code qualifier	C an..4	R	*	14 = GS1
0014 Routing address	C an..14	O		
S004 DATE/TIME OF PREPARATION	M	M		
0017 Date of preparation	M n6	M		YYMMDD
0019 Time of preparation	M n4	M		HHMM
0020 Interchange control reference	M an..14	M		Unique reference identifying the interchange. Created by the interchange sender.
S005 RECIPIENT'S REFERENCE, PASSWORD	C	O		
0022 Recipient's reference/ password	M an..14	M		
0025 Recipient's reference/ password qualifier	C an2	O		
0026 Application reference	C an..14	O		Message identification if the interchange contains only one type of message.
0029 Processing priority code	C a1	O		A = Highest priority
0031 Acknowledgement request	C n1	O		1 = Requested
0032 Communications agreement ID	C an..35	O	*	EANCOM.....
0035 Test indicator	C n1	O		1 = Interchange is a test
Segment Notes: This segment is used to envelope the interchange, as well as to identify both, the party to whom the interchange is sent and the party who has sent the interchange. The principle of the UNB segment is the same as a physical envelope which covers one or more letters or documents, and which details, both the address where delivery is to take place and the address from where the envelope has come.				

## 5. Segments Layout

---

Segment number: 2

S001: The character encoding specified in basic code table of ISO/IEC 646 (7-bit coded character set for information interchange) shall be used for the interchange service string advice (if used) and up to and including the composite data element S001 'Syntax identifier' in the interchange header. The character repertoire used for the characters in an interchange shall be identified from the code value of data element 0001 in S001 'Syntax identifier' in the interchange header. The character repertoire identified does not apply to objects and/or encrypted data.

The default encoding technique for a particular repertoire shall be the encoding technique defined by its associated character set specification.

DE 0001: The recommended (default) character set for use in EANCOM® for international exchanges is character set A (UNOA). Should users wish to use character sets other than A, an agreement on which set to use should be reached on a bilateral basis before communications begin.

DE 0004, 0008, 0010, 0014, 0042 and 0046: Within EANCOM® the use of the Global Location Number (GLN) is recommended for the identification of the interchange sender and recipient.

DE 0008: Identification (e.g. a division) specified by the sender of the interchange, to be included if agreed, by the recipient in response interchanges, to facilitate internal routing.

DE 0042: Sub-level of sender internal identification, when further sub-level identification is required.

DE 0014: The address for routing, provided beforehand by the interchange recipient, is used by the interchange sender to inform the recipient of the internal address, within the latter's systems, to which the interchange should be routed. It is recommended that the GLN be used for this purpose.

DE 0007: Identification (e.g. a division) specified by the recipient of the interchange, to be included if agreed, by the sender in response interchanges, to facilitate internal routing.

DE 0046: Sub-level of recipient internal identification, when further sub-level identification is required.

DE S004: The date and time specified in this composite should be the date and time at which the interchange sender prepared the interchange. This date and time may not necessarily be the same as the date and time of contained messages.

DE 0020: The interchange control reference number is generated by the interchange sender and is used to identify uniquely each interchange. Should the interchange sender wish to re-use interchange control reference numbers, it is recommended that each number be preserved for at least a period of three months before being re-used. In order to guarantee uniqueness, the interchange control reference number should always be linked to the interchange sender's identification (DE 0004).

DE S005: The use of passwords must first be agreed bilaterally by the parties exchanging the interchange.

DE 0026: This data element is used to identify the application, on the interchange recipient's system, to which the interchange is directed. This data element may only be used if the interchange contains only one type of message, (e.g. only invoices). The reference used in this data element is assigned by the interchange sender.

DE 0031: This data element is used to indicate whether an acknowledgement to the interchange is required. The EANCOM® APERAK or CONTRL message should be used to provide acknowledgement of interchange receipt. In addition, the EANCOM® CONTRL message may be used to indicate when an interchange has been rejected due to syntax errors.

DE 0032: This data element is used to identify any underlying agreements which control the exchange of data. Within EANCOM®, the identity of such agreements must start with the letters 'EANCOM', the remaining characters within the data element being filled according to bilateral agreements.

UNB+UNOA:3+5412345678908:14+8798765432106:14+020102:1000+12345555+++++EANCOMREF 52'

## 5. Segments Layout

Segment number: 3

<b>UNH</b> - M 1 - Message header				
Function: To head, identify and specify a message.				
	EDIFACT	GS1	*	Description
0062 Message reference number	M an..14	<b>M</b>		Sender's unique message reference Sequence number of message in the interchange. DE 0062 in the UNT will have the same value. Sender generated.
S009 MESSAGE IDENTIFIER	M	<b>M</b>		
0065 Message type	M an..6	<b>M</b>	*	PAYMUL = Multiple payment order message
0052 Message version number	M an..3	<b>M</b>	*	D = Draft version/UN/EDIFACT Directory
0054 Message release number	M an..3	<b>M</b>	*	01B = Release 2001 - B
0051 Controlling agency	M an..2	<b>M</b>	*	UN = UN/CEFACT
0057 Association assigned code	C an..6	<b>R</b>	*	EAN003 = GS1 version control number (GS1 Permanent Code) Indicates that the message is the EANCOM version 003 of the UNSM Multiple Payment Order.
0068 Common access reference	C an..35	<b>N</b>		
S010 STATUS OF THE TRANSFER	C	<b>N</b>		
0070 Sequence of transfers	M n..2			
0073 First and last transfer	C a1			
Segment Notes:  This segment is used to head, identify and specify a message. DE's 0065, 0052, 0054 and 0051: Indicate that the message is a UNSM Multiple Payment Order message based on the D.01B directory under the control of the United Nations.  Example: UNH+ME0000001+PAYMUL:D:01B:UN:EAN003'				

## 5. Segments Layout

Segment number: 4

<b>BGM</b> - M 1 - Beginning of message				
Function: To indicate the type and function of a message and to transmit the identifying number.				
	EDIFACT	GS1	*	Description
C002 DOCUMENT/MESSAGE NAME	C	R		
1001 Document name code	C an..3	R	*	452 = <b>Multiple payment order</b>
1131 Code list identification code	C an..17	N		
3055 Code list responsible agency code	C an..3	N		
1000 Document name	C an..35	N		
C106 DOCUMENT/MESSAGE IDENTIFICATION	C	R		
1004 Document identifier	C an..35	R		Multiple payment order number assigned by the document sender. The multiple payment order number will be passed to the party ordering the payment on the debit advice or in the statement for the transaction for reconciliation purposes together with the reference number provided in group 4. For the cancellation of a previously sent Multiple Payment Order message the FINCAN message should be used. For global unique identification of documents Global Document Type Identifier (GDTI) is available.
1056 Version identifier	C an..9	N		
1060 Revision identifier	C an..6	N		
1225 Message function code	C an..3	R	*	7 = <b>Duplicate</b> 9 = <b>Original</b> The message function coded, is a critical data element in this segment. It applies to all data indicated in the message. The following definitions apply for the restricted codes: 7 = Duplicate - The message is a duplicate of a previously generated Multiple payment order message. 9 = Original - The original transmission of a Multiple payment order.
4343 Response type code	C an..3	N		
Segment Notes: All references other than the document number DE 1004 should be put in the RFF segment.  Example: BGM+452+233851+9'				

## 5. Segments Layout

Segment number: 5

<b>DTM</b> - M 1 - Date/time/period				
Function: To specify date, and/or time, or period.				
	EDIFACT	GS1	*	Description
C507 DATE/TIME/PERIOD	M	<b>M</b>		
2005 Date or time or period function code qualifier	M an..3	<b>M</b>	*	137 = <b>Document/message date/time</b>
2380 Date or time or period value	C an..35	<b>R</b>		
2379 Date or time or period format code	C an..3	<b>R</b>		102 = <b>CCYYMMDD</b>
Segment Notes: This segment is used to specify the date on which the Multiple Payment Order message was created. DE 2005: Identification of the 'Document/message date/time' (code value 137) is mandatory in an EANCOM message. Example: DTM+137:20020112:102'				

## 5. Segments Layout

Segment number: 6

BUS		- C	1 - Business function		
Function:					
To provide information related to the processing and purpose of a financial message.					
		EDIFACT	GS1	*	Description
C521	BUSINESS FUNCTION	C	N		
4027	Business function type code qualifier	M an..3			
4025	Business function code	M an..3			
1131	Code list identification code	C an..17			
3055	Code list responsible agency code	C an..3			
4022	Business description	C an..70			
3279	Geographic area code	C an..3	R	*	DO = Domestic IN = International YC4 = European (SWIFT Code)
4487	Financial transaction type code	C an..3	N		
C551	BANK OPERATION	C	N		
4383	Bank operation code	M an..3			
1131	Code list identification code	C an..17			
3055	Code list responsible agency code	C an..3			
4463	Intra-company payment indicator code	C an..3	N		
Segment Notes:					
This segment is used to indicate whether all of the payments contained in the message are Domestic, European, or International.					
Example: BUS++DO'					

## 5. Segments Layout

Segment number: 7

<b>SG2</b>	- C	5 - FII			
<b>FII</b>	- M	1 - Financial institution information			
Function:					
To identify an account and a related financial institution.					
	EDIFACT	GS1	*	Description	
3035	Party function code qualifier	M an..3	M	*	MR = Message recipient
C078	ACCOUNT HOLDER IDENTIFICATION	C	N		
3194	Account holder identifier	C an..35			
3192	Account holder name	C an..35			
3192	Account holder name	C an..35			
6345	Currency identification code	C an..3			
C088	INSTITUTION IDENTIFICATION	C	R		
3433	Institution name code	C an..11	A		
1131	Code list identification code	C an..17	O		25 = Bank identification
3055	Code list responsible agency code	C an..3	D		5 = ISO (International Organization for Standardization)
3434	Institution branch identifier	C an..17	O		
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	D		
3432	Institution name	C an..70	O		
3436	Institution branch location name	C an..70	O		
3207	Country name code	C an..3	O		ISO 3166 two alpha code
Segment Notes:					
This segment is used to identify the receiving financial institution of the multiple payment order message. The preferred way to identify a bank and its branch is in machine readable format using data elements 3433 and 3434. When using C088 it is recommended that if data element 3433 is not used that 3432 be used, and that when data element 3434 is not used that data element 3436 be used.					
Example:					
FII+MR++KREDBEBB:25:5'					
The bank receiving the multiple payment order message is identified using the bank identification code KREDBEBB (which is maintained by ISO).					



## 5. Segments Layout

Segment number: 8

<b>SG3</b>	- C	3 - NAD			
<b>NAD</b>	- M	1 - Name and address			
Function:					
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.					
	EDIFACT	GS1	*	Description	
3035	Party function code qualifier	M an..3	M	*	MS = Document/message issuer/sender
C082	PARTY IDENTIFICATION DETAILS	C	A		
3039	Party identifier	M an..35	M		For identification of parties it is recommended to use GLN - Format n13.
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	R	*	9 = GS1
C058	NAME AND ADDRESS	C	O		This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124	Name and address description	M an..35	M		
3124	Name and address description	C an..35	O		
3124	Name and address description	C an..35	O		
3124	Name and address description	C an..35	O		
3124	Name and address description	C an..35	O		
C080	PARTY NAME	C	D		
3036	Party name	M an..35	M		Party name in clear text.
3036	Party name	C an..35	O		
3036	Party name	C an..35	O		
3036	Party name	C an..35	O		
3036	Party name	C an..35	O		
3045	Party name format code	C an..3	O		
C059	STREET	C	D		
3042	Street and number or post office box identifier	M an..35	M		Building Name/Number and Street Name
3042	Street and number or post office box identifier	C an..35	O		
3042	Street and number or post office box identifier	C an..35	O		
3042	Street and number or post office box identifier	C an..35	O		
3164	City name	C an..35	D		City/Town name, clear text
C819	COUNTRY SUB-ENTITY DETAILS	C	D		
3229	Country sub-entity name code	C an..9	O		
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	O		

## 5. Segments Layout

---

Segment number: 8

	EDIFACT	GS1	*	Description
3228 Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251 Postal identification code	C an..17	<b>D</b>		Postal code
3207 Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code
<p>Segment Notes:</p> <p>This segment is used to identify the sender of the multiple payment order message.</p> <p>Example:  NAD+MS+5422331123459::9'</p> <p>Dependency Notes:</p> <p>The following composites and data elements are only used when a coded name and address can not be used.  The affected composites and data elements are as follows;  C080 - C059 - 3164 - C819 - 3251 - 3207</p>				

## 5. Segments Layout

Segment number: 9

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>LIN</b>	- M	1 - Line item		
Function: To identify a line item and configuration.				
	EDIFACT	GS1	*	Description
1082	Line item identifier	C an..6	R	Application generated number of the count of the lines in the multiple payment order.
1229	Action request/notification description code	C an..3	N	
C212	ITEM NUMBER IDENTIFICATION	C	N	
7140	Item identifier	C an..35		
7143	Item type identification code	C an..3		
1131	Code list identification code	C an..17		
3055	Code list responsible agency code	C an..3		
C829	SUB-LINE INFORMATION	C	N	
5495	Sub-line indicator code	C an..3		
1082	Line item identifier	C an..6		
1222	Configuration level number	C n..2	N	
7083	Configuration operation code	C an..3	N	
Segment Notes:				
This segment is used to identify a line within the multiple payment order by means of a incrementing unique line number. If Global Trade Item Numbers are available it is mandatory to use GTIN within the LIN segment.				
Note on DE 1082: Numbering rule: In Part I, section 4.10 there is the recommendation "Within EANCOM® it is recommended that the line numbers used in the first occurrence of data element 1082 in the LIN segment be sequential, starting at 1 for each new message."				
Example: LIN+1'				



## 5. Segments Layout

Segment number: 11

<b>SG4</b> - M 9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11				
<b>RFF</b> - C 2 - Reference				
Function: To specify a reference.				
	EDIFACT	GS1	*	Description
C506 REFERENCE	M	M		
1153 Reference code qualifier	M an..3	M		AEK = <a href="#">Payment order number</a> Code value 'AEK' is issued by the ordering customer to identify the debit entry and is used in subsequent messages in the payment chain.
1154 Reference identifier	C an..70	R		
1156 Document line identifier	C an..6	N		
4000 Reference version identifier	C an..35	N		
1060 Revision identifier	C an..6	N		
Segment Notes:  This segment is used to identify the reference number of the debit instruction. This number, along with the message number detailed in data element 1004 in the BGM segment, are passed back to the ordering customer in the debit advice (and multiple debit advice), banking status, and financial messages.  Example: RFF+AEK:877212'				

## 5. Segments Layout

Segment number: 12

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11			
<b>BUS</b>	- C	1 - Business function			
Function:					
To provide information related to the processing and purpose of a financial message.					
		EDIFACT	GS1	*	Description
C521	BUSINESS FUNCTION	C	O		
4027	Business function type code qualifier	M an..3	M	*	1 = Underlying business function
4025	Business function code	M an..3	M		AAN = Business expenses COM = Commission COS = Costs GDS = Purchase and sale of goods INT = Interest NET = Netting PEN = Pension TAX = Tax payment
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	D	*	9 = GS1
4022	Business description	C an..70	O		
3279	Geographic area code	C an..3	R	*	DO = Domestic IN = International YC4 = European (SWIFT Code)
4487	Financial transaction type code	C an..3	O	*	1 = Clean payment 4 = Documentary payment
C551	BANK OPERATION	C	N		
4383	Bank operation code	M an..3			
1131	Code list identification code	C an..17			
3055	Code list responsible agency code	C an..3			
4463	Intra-company payment indicator code	C an..3	O	*	1 = Intra-company payment
Segment Notes:					
This segment is used to identify the characteristics of the payment orders detailed in level C of the message. The contents of this segment will be transferred unchanged to the beneficiary of the multiple payment order. When this segment is not used the message defaults to a non-intra company domestic clean payment.					
Example: BUS+1:GDS+IN'					
The multiple payment order relates to a clean international payment for the purchase/sale of goods.					

## 5. Segments Layout

Segment number: 13

<b>SG4</b> - M 9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11				
<b>FCA</b> - C 1 - Financial charges allocation				
Function:				
Description of allocation of charges.				
	EDIFACT	GS1	*	Description
4471 Settlement means code	M an..3	<b>M</b>	*	13 = All charges borne by payee 14 = Each pay own cost 15 = All charges borne by payor When using code value '15' in this data element it is not recommended that C878 be used.
C878 CHARGE/ALLOWANCE ACCOUNT	C	<b>D</b>		Composite data element C878 should only be provided if the account number against which charges are to be allocated are different to the ordering customers account (debit account) number.
3434 Institution branch identifier	M an..17	<b>M</b>		
1131 Code list identification code	C an..17	<b>O</b>		25 = Bank identification 154 = Bank branch sorting identification
3055 Code list responsible agency code	C an..3	<b>D</b>		5 = ISO (International Organization for Standardization)
3194 Account holder identifier	C an..35	<b>O</b>		If this data element is not used the primary account (i.e. the ordered bank account) specified in the FII segment should be used.
6345 Currency identification code	C an..3	<b>O</b>		ISO 4217 three alpha
Segment Notes:				
This segment is used to identify the party on which any charges are allocated and the account (of the ordering customer) to which the charges should be directed.				
Example: FCA+15'				

## 5. Segments Layout

Segment number: 14

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG5</b>	- C	1 - MOA-CUX-DTM-RFF		
<b>MOA</b>	- M	1 - Monetary amount		
Function: To specify a monetary amount.				
	EDIFACT	GS1	*	Description
C516	MONETARY AMOUNT	M	<b>M</b>	
5025	Monetary amount type code qualifier	M an..3	<b>M</b>	*  9 = <b>Amount due/amount payable</b> 57 = <b>Equivalent amount</b>  When code 57 (equivalent amount) is used in this data element it is used to instruct a bank to debit an account by a specified amount of the account currency and to credit the beneficiary's account by an equivalent amount in a currency specified in the CUX segment.
5004	Monetary amount	C n..35	<b>R</b>	
6345	Currency identification code	C an..3	<b>A</b>	ISO 4217 three alpha code
6343	Currency type code qualifier	C an..3	<b>N</b>	
4405	Status description code	C an..3	<b>N</b>	
Segment Notes:  This segment is used to specify the payment amount for the debit instruction.  Example: MOA+9:50000:EUR'				



## 5. Segments Layout

Segment number: 15

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG5</b>	- C	1	- MOA-CUX-DTM-RFF
<b>CUX</b>	- C	1	- Currencies

Function:  
To specify currencies used in the transaction and relevant details for the rate of exchange.

	EDIFACT	GS1	*	Description
C504 CURRENCY DETAILS	C	R		
6347 Currency usage code qualifier	M an..3	M	*	2 = Reference currency Reference currency = Debit currency Target currency = Credit currency
6345 Currency identification code	C an..3	R		ISO 4217 three alpha
6343 Currency type code qualifier	C an..3	N		
6348 Currency rate value	C n..4	D		
C504 CURRENCY DETAILS	C	D		The second occurrence of this composite is only used if a target currency is being specified.
6347 Currency usage code qualifier	M an..3	M	*	3 = Target currency
6345 Currency identification code	C an..3	R		ISO 4217 three alpha
6343 Currency type code qualifier	C an..3	N		
6348 Currency rate value	C n..4	D		
5402 Currency exchange rate	C n..12	D		The rate of exchange which applies to the currency. The rate of exchange is only used if a target currency has been identified in the second occurrence of C504.
6341 Exchange rate currency market identifier	C an..3	N		

Segment Notes:  
  
This segment is used to specify the currency of the monetary amount detailed in the previous MOA segment. The CUX segment is only used if code 57 (Equivalent amount) has been used in data element 5025 of the previous MOA segment. The currency information is required only by the ordering customer and its bank. When specifying the Reference and Target currencies for international trade, one occurrence of CUX is all that is required. The reference currency is identified in the first occurrence of composite C504, with the target currency specified in the second occurrence of C504. The rate of exchange between the two is detailed in DE 5402. The general rule for calculating the rate of exchange is as follows;  
Reference Currency multiplied by Rate = Target Currency.  
  
Example:  
CUX+2:EUR+3:USD+0.90243'  
  
Dependency Notes:  
6348: These data elements are only used when a rate of exchange is provided in data element 5402. When a rate of exchange is provided then at least one currency rate base must be specified.

## 5. Segments Layout

Segment number: 16

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG5</b>	- C	1 - MOA-CUX-DTM-RFF
<b>DTM</b>	- C	2 - Date/time/period
Function: To specify date, and/or time, or period.		
	EDIFACT	GS1 * Description
C507 DATE/TIME/PERIOD	M	<b>M</b>
2005 Date or time or period function code qualifier	M an..3	<b>M</b> * 134 = Rate of exchange date/time 171 = Reference date/time
2380 Date or time or period value	C an..35	<b>R</b>
2379 Date or time or period format code	C an..3	<b>R</b> 102 = CCYYMMDD
Segment Notes: This segment is used to specify reference and rate of exchange dates.  Example: DTM+134:20020525:102'		



## 5. Segments Layout

Segment number: 18

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG6</b>	- M	2 - FII
<b>FII</b>	- M	1 - Financial institution information

Function:  
To identify an account and a related financial institution.

		EDIFACT	GS1	*	Description
3035	Party function code qualifier	M an..3	<b>M</b>	*	OR = <b>Ordered bank</b>
C078	ACCOUNT HOLDER IDENTIFICATION	C	<b>R</b>		
3194	Account holder identifier	C an..35	<b>R</b>		Account number to be debited.
3192	Account holder name	C an..35	<b>O</b>		
3192	Account holder name	C an..35	<b>O</b>		
6345	Currency identification code	C an..3	<b>O</b>		ISO 4217 three alpha
C088	INSTITUTION IDENTIFICATION	C	<b>D</b>		In some countries it is possible to identify within the account number the institution name and branch. Where this is possible the composite C088 will not be required. For international transactions it is recommended that the need for composite C088 should be checked before sending the message.
3433	Institution name code	C an..11	<b>A</b>		
1131	Code list identification code	C an..17	<b>O</b>		25 = <b>Bank identification</b>
3055	Code list responsible agency code	C an..3	<b>D</b>		5 = <b>ISO (International Organization for Standardization)</b>
3434	Institution branch identifier	C an..17	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		
3432	Institution name	C an..70	<b>O</b>		
3436	Institution branch location name	C an..70	<b>O</b>		
3207	Country name code	C an..3	<b>O</b>		ISO 3166 two alpha code

Segment Notes:  
This segment is used to identify the financial institution and account information related to the ordering customer (payor) for the debit instruction.  
The preferred way to identify a bank and its branch is in machine readable format using data elements 3433 and 3434. When using C088 it is recommended that if data element 3433 is not used that 3432 be used, and that when data element 3434 is not used that data element 3436 be used.

Example:  
FII+OR+994-3277711:N GEISS'  
The ordering customer is identified as being N Geiss with a bank account number of 994-3277711.

## 5. Segments Layout

Segment number: 19

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG7</b>	- C	3	- NAD-CTA-COM		
<b>NAD</b>	- M	1	- Name and address		
Function:					
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.					
		EDIFACT	GS1	*	Description
3035	Party function code qualifier	M an..3	<b>M</b>		OY = <a href="#">Ordering customer</a>
C082	PARTY IDENTIFICATION DETAILS	C	<b>A</b>		
3039	Party identifier	M an..35	<b>M</b>		For identification of parties it is recommended to use GLN - Format n13.
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>R</b>	*	9 = <b>GS1</b>
C058	NAME AND ADDRESS	C	<b>O</b>		This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124	Name and address description	M an..35	<b>M</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
C080	PARTY NAME	C	<b>D</b>		
3036	Party name	M an..35	<b>M</b>		Party name in clear text.
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3045	Party name format code	C an..3	<b>O</b>		
C059	STREET	C	<b>D</b>		
3042	Street and number or post office box identifier	M an..35	<b>M</b>		Building Name/Number and Street Name
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3164	City name	C an..35	<b>D</b>		City/Town name, clear text
C819	COUNTRY SUB-ENTITY DETAILS	C	<b>D</b>		
3229	Country sub-entity name code	C an..9	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency	C an..3	<b>O</b>		

## 5. Segments Layout

---

Segment number: 19

	EDIFACT	GS1	*	Description
code				
3228 Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251 Postal identification code	C an..17	<b>D</b>		Postal code
3207 Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code

### Segment Notes:

This segment is used to identify the ordering customer for the debit instruction.

### Example:

NAD+OY+5422331123459::9'

### Dependency Notes:

The following composites and data elements are only used when a coded name and address can not be used.

The affected composites and data elements are as follows;

C080 - C059 - 3164 - C819 - 3251 - 3207

## 5. Segments Layout

Segment number: 20

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG7</b>	- C	3 - NAD-CTA-COM
<b>CTA</b>	- C	1 - Contact information
Function:		
To identify a person or a department to whom communication should be directed.		
	EDIFACT	GS1 * Description
3139 Contact function code	C an..3	<b>R</b> IC = <a href="#">Information contact</a>
C056 DEPARTMENT OR EMPLOYEE DETAILS	C	<b>O</b>
3413 Department or employee name code	C an..17	<b>O</b>
3412 Department or employee name	C an..35	<b>O</b>
Segment Notes:		
This segment is used to provide contact details relevant for the party identified in the previous NAD segment.		
Example:		
CTA+IC+:T. WRIGHT'		

## 5. Segments Layout

Segment number: 21

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG7</b>	- C	3 - NAD-CTA-COM
<b>COM</b>	- C	5 - Communication contact
Function: To identify a communication number of a department or a person to whom communication should be directed.		
	EDIFACT	GS1 * Description
C076 COMMUNICATION CONTACT	M	<b>M</b>
3148 Communication address identifier	M an..512	<b>M</b>
3155 Communication address code qualifier	M an..3	<b>M</b> AO = <a href="#">Uniform Resource Location (URL)</a> CA = <a href="#">Cable address</a> EI = <a href="#">EDI</a> EM = <a href="#">Electronic mail</a> TE = <a href="#">Telephone</a>
Segment Notes: This segment is used to provide communications details relevant to the contact identified in the CTA segment.  Example: COM+003212187674:FX'		



## 5. Segments Layout

Segment number: 22

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG8</b>	- C	1 - INP-FTX-DTM
<b>INP</b>	- M	1 - Parties and instruction

Function:

To specify parties to an instruction, the instruction, or both.

		EDIFACT	GS1	*	Description
C849	PARTIES TO INSTRUCTION	C	A		
3301	Enacting party identifier	M an..35	M		3 = <a href="#">Beneficiary's bank</a> YC7 = <a href="#">Ordered bank (SWIFT Code)</a>
3285	Instruction receiving party identifier	C an..35	O		4 = <a href="#">Beneficiary</a> 5 = <a href="#">Contact party 1</a> YC5 = <a href="#">Ordered bank (SWIFT Code)</a>
C522	INSTRUCTION	C	O		
4403	Instruction type code qualifier	M an..3	M		1 = <a href="#">Action required</a>
4401	Instruction description code	C an..3	O		AD = <a href="#">Advise</a> AP = <a href="#">Advise by phone</a> AJ = <a href="#">Advise by fax (SWIFT Code)</a> EX = <a href="#">Expedite</a>
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	D		
4400	Instruction description	C an..35	N		
C850	STATUS OF INSTRUCTION	C	N		
4405	Status description code	M an..3			
3036	Party name	C an..35			
1229	Action request/notification description code	C an..3	N		

Segment Notes:

This segment is used to identify the party who must carry out an instruction from the ordering customer, and the party to whom the instruction is intended.

DE's 3301 and 3285: As these data elements are being used to provide coded information it is recommended that their format and length be restricted to an..3.

Example:

INP+3:4+1:AP'

## 5. Segments Layout

Segment number: 23

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG8</b>	- C	1 - INP-FTX-DTM
<b>FTX</b>	- C	1 - Free text
Function: To provide free form or coded text information.		
	EDIFACT	GS1 * Description
4451 Text subject code qualifier	M an..3	<b>M</b> AAG = <a href="#">Party instructions</a>
4453 Free text function code	C an..3	<b>N</b>
C107 TEXT REFERENCE	C	<b>D</b> This composite is only used when trading partners have agreed to use mutually defined code values.
4441 Free text value code	M an..17	<b>M</b> Coded reference to standard text between partners.
1131 Code list identification code	C an..17	<b>O</b>
3055 Code list responsible agency code	C an..3	<b>D</b> 86 = <a href="#">Assigned by party originating the message</a>
C108 TEXT LITERAL	C	<b>D</b> This composite is only used if coded text can not be used.
4440 Free text value	M an..512	<b>M</b>
4440 Free text value	C an..512	<b>O</b>
4440 Free text value	C an..512	<b>O</b>
4440 Free text value	C an..512	<b>O</b>
4440 Free text value	C an..512	<b>O</b>
3453 Language name code	C an..3	<b>D</b> ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447 Free text format code	C an..3	<b>N</b>
Segment Notes:  This segment is used to provide additional coded or free text instructions to those provided in the INP segment. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.  Example: FTX+AAG+++IF INSUFFICIENT FUNDS IN NUMBER 1 ACCOUNT USE NUMBER 2'		

## 5. Segments Layout

Segment number: 24

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG8</b>	- C	1 - INP-FTX-DTM
<b>DTM</b>	- C	2 - Date/time/period
Function: To specify date, and/or time, or period.		
	EDIFACT	GS1 * Description
C507 DATE/TIME/PERIOD	M	<b>M</b>
2005 Date or time or period function code qualifier	M an..3	<b>M</b> * 174 = Advise after date/time 175 = Advise before date/time 177 = Advise on date/time
2380 Date or time or period value	C an..35	<b>R</b>
2379 Date or time or period format code	C an..3	<b>R</b> 102 = CCYYMMDD
Segment Notes: This segment is used to specify the earliest and latest dates by which the instructions must be carried out.  Example: DTM+175:200206171000:203' Advise before 10am on the 17th of June 2002.		



## 5. Segments Layout

Segment number: 26

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG9</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>MOA</b>	- C	1 - Monetary amount
Function: To specify a monetary amount.		
	EDIFACT	GS1 * Description
C516 MONETARY AMOUNT	M	<b>M</b>
5025 Monetary amount type code qualifier	M an..3	<b>M</b> 139 = <a href="#">Total payment amount</a>
5004 Monetary amount	C n..35	<b>R</b>
6345 Currency identification code	C an..3	<b>O</b> ISO 4217 three alpha code
6343 Currency type code qualifier	C an..3	<b>O</b> 11 = <a href="#">Payment currency</a>
4405 Status description code	C an..3	<b>N</b>
Segment Notes:  This segment is used to specify monetary amounts which must be reported to the regulatory party identified in the NAD segment.  Example: MOA+139:125000:EUR:11'		

## 5. Segments Layout

Segment number: 27

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG9</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX		
<b>LOC</b>	- C	2 - Place/location identification		
Function: To identify a place or a location and/or related locations.				
	EDIFACT	GS1	*	Description
3227	Location function code qualifier	M an..3	<b>M</b>	27 = Country of origin 28 = Country of destination of goods 39 = Country of production 40 = Country of trading
C517	LOCATION IDENTIFICATION	C	<b>A</b>	
3225	Location name code	C an..25	<b>A</b>	For country identification see ISO 3166 two alpha code, DE 3207.
1131	Code list identification code	C an..17	<b>O</b>	
3055	Code list responsible agency code	C an..3	<b>D</b>	5 = ISO (International Organization for Standardization) 9 = GS1 DE 3055 must be used if DE 3225 is used and does not contain an UN/LOCODE.
3224	Location name	C an..256	<b>O</b>	
C519	RELATED LOCATION ONE IDENTIFICATION	C	<b>N</b>	
3223	First related location name code	C an..25		
1131	Code list identification code	C an..17		
3055	Code list responsible agency code	C an..3		
3222	First related location name	C an..70		
C553	RELATED LOCATION TWO IDENTIFICATION	C	<b>N</b>	
3233	Second related location name code	C an..25		
1131	Code list identification code	C an..17		
3055	Code list responsible agency code	C an..3		
3232	Second related location name	C an..70		
5479	Relation code	C an..3	<b>N</b>	
Segment Notes: This segment is used to indicate any locations relevant to the regulatory party identified in the NAD segment. Example: LOC+39+BE::5' Goods were produced in Belgium.				

## 5. Segments Layout

Segment number: 28

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11			
<b>SG9</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX			
<b>NAD</b>	- C	1 - Name and address			
Function:					
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.					
	EDIFACT	GS1	*	Description	
3035	Party function code qualifier	M an..3	<b>M</b>	*	RA = <b>Central bank or regulatory authority</b>
C082	PARTY IDENTIFICATION DETAILS	C	<b>A</b>		
3039	Party identifier	M an..35	<b>M</b>		For identification of parties it is recommended to use GLN - Format n13.
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>R</b>	*	9 = <b>GS1</b>
C058	NAME AND ADDRESS	C	<b>O</b>		This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124	Name and address description	M an..35	<b>M</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
3124	Name and address description	C an..35	<b>O</b>		
C080	PARTY NAME	C	<b>D</b>		
3036	Party name	M an..35	<b>M</b>		Party name in clear text.
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3036	Party name	C an..35	<b>O</b>		
3045	Party name format code	C an..3	<b>O</b>		
C059	STREET	C	<b>D</b>		
3042	Street and number or post office box identifier	M an..35	<b>M</b>		Building Name/Number and Street
3042	Street and number or post office box identifier	C an..35	<b>O</b>		Name and/or P.O. Box.
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3164	City name	C an..35	<b>D</b>		City/town name, clear text.
C819	COUNTRY SUB-ENTITY DETAILS	C	<b>D</b>		
3229	Country sub-entity name code	C an..9	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency	C an..3	<b>O</b>		

## 5. Segments Layout

---

Segment number: 28

	EDIFACT	GS1	*	Description
code				
3228 Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251 Postal identification code	C an..17	<b>D</b>		Postal code.
3207 Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code

### Segment Notes:

This segment is used to identify the central and regulatory authority specifying the regulatory information detailed in the GIS and FTX segments.

### Example:

NAD+RA+5422331123459::9'

### Dependency Notes:

The following composites and data elements are only used when a coded name and address can not be used.

The affected composites and data elements are as follows;

C080 - C059 - 3164 - C819 - 3251 - 3207



## 5. Segments Layout

Segment number: 29

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG9</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>RCS</b>	- C	1 - Requirements and conditions

Function:

To specify sector/subject requirements and conditions.

		EDIFACT	GS1	*	Description
7293	Sector area identification code qualifier	M an..3	<b>M</b>	*	25 = <b>Banking sector</b>
C550	REQUIREMENT/CONDITION IDENTIFICATION	C	<b>A</b>		
7295	Requirement or condition description identifier	M an..17	<b>M</b>		As no EDIFACT code values exist for this data element it is recommended that nationally agreed codes be formulated to identify the requirements and conditions possible due to regulatory requirements.
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		86 = <b>Assigned by party originating the message</b>
7294	Requirement or condition description	C an..35	<b>O</b>		
1229	Action request/notification description code	C an..3	<b>N</b>		
3207	Country name code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to indicate any requirements and conditions related to the transaction which is being reported to the regulatory authorities.

Example:

RCS+25+AB1::86'

Code assigned by the message sender indicating that the requirements and conditions relate to regulatory requirements to report the payment of amount in excess of a certain amount.

## 5. Segments Layout

Segment number: 30

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG9</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>FTX</b>	- C	10 - Free text

Function:  
To provide free form or coded text information.

		EDIFACT	GS1	*	Description
4451	Text subject code qualifier	M an..3	<b>M</b>	*	REG = <b>Regulatory information</b>
4453	Free text function code	C an..3	<b>N</b>		
C107	TEXT REFERENCE	C	<b>D</b>		This composite is only used when trading partners have agreed to use mutually defined code values.
4441	Free text value code	M an..17	<b>M</b>		A code identifying standard text agreed between partners.
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		
C108	TEXT LITERAL	C	<b>D</b>		This composite is only used if coded text can not be used.
4440	Free text value	M an..512	<b>M</b>		
4440	Free text value	C an..512	<b>O</b>		
4440	Free text value	C an..512	<b>O</b>		
4440	Free text value	C an..512	<b>O</b>		
4440	Free text value	C an..512	<b>O</b>		
3453	Language name code	C an..3	<b>D</b>		ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447	Free text format code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to provide free or coded text information required by the regulatory authorities. The form and content of this segment is dependent upon the central bank or regulatory authority's requirements. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.

Example:  
FTX+REG+++SUBJECT TO EUROPEAN CENTRAL BANK REGULATIONS'

## 5. Segments Layout

Segment number: 31

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG10</b>	- C	1 - PRC-FTX		
<b>PRC</b>	- M	1 - Process identification		
Function: To identify a process.				
	EDIFACT	GS1	*	Description
C242	PROCESS TYPE AND DESCRIPTION	C	R	
7187	Process type description code	M an..17	M	*  11 = <b>Processing of unstructured information</b> The information following this segment is presented in an unstructured format using the following FTX segment.
1131	Code list identification code	C an..17	N	
3055	Code list responsible agency code	C an..3	N	
7186	Process type description	C an..35	N	
7186	Process type description	C an..35	N	
C830	PROCESS IDENTIFICATION DETAILS	C	N	
7191	Process description code	C an..17		
1131	Code list identification code	C an..17		
3055	Code list responsible agency code	C an..3		
7190	Process description	C an..70		
Segment Notes: This segment is used to provide processing information for each beneficiary of the debit instructions.  Example: PRC+11'				

## 5. Segments Layout

Segment number: 32

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG10</b>	- C	1 - PRC-FTX		
<b>FTX</b>	- M	1 - Free text		
Function: To provide free form or coded text information.				
	EDIFACT	GS1	*	Description
4451	Text subject code qualifier	M an..3	<b>M</b>	PMD = <a href="#">Payment detail/remittance information</a>
4453	Free text function code	C an..3	<b>N</b>	
C107	TEXT REFERENCE	C	<b>D</b>	This composite is only used when trading partners have agreed to use mutually defined code values.
4441	Free text value code	M an..17	<b>M</b>	A code identifying standard text agreed between trading partners.
1131	Code list identification code	C an..17	<b>O</b>	
3055	Code list responsible agency code	C an..3	<b>D</b>	
C108	TEXT LITERAL	C	<b>D</b>	This composite is only used if coded text can not be used.
4440	Free text value	M an..512	<b>M</b>	
4440	Free text value	C an..512	<b>O</b>	
4440	Free text value	C an..512	<b>O</b>	
4440	Free text value	C an..512	<b>O</b>	
4440	Free text value	C an..512	<b>O</b>	
3453	Language name code	C an..3	<b>D</b>	ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447	Free text format code	C an..3	<b>N</b>	
Segment Notes:  This segment is used to provide free or coded text information related to the processing of the payment. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.				
Example: FTX+PMD+++SALARY JAN 1995'				

## 5. Segments Layout

Segment number: 33

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SEQ</b>	- M	1 - Sequence details

Function:

To provide details relating to the sequence.

		EDIFACT	GS1	*	Description
1229	Action request/notification description code	C an..3	N		
C286	SEQUENCE INFORMATION	C	R		
1050	Sequence position identifier	M an..10	M		
1159	Sequence identifier source code	C an..3	N		
1131	Code list identification code	C an..17	N		
3055	Code list responsible agency code	C an..3	N		

Segment Notes:

This segment is used to identify the start of the credit side of the transaction (level C) by means of a sequence number within the current line number. The sequence number should be reset to one for each occurrence of a new line number (in LIN segment).

Example:  
SEQ++1'

## 5. Segments Layout

Segment number: 34

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>MOA</b>	- M	1	- Monetary amount

Function:  
To specify a monetary amount.

	EDIFACT	GS1	*	Description	
C516	MONETARY AMOUNT	M	<b>M</b>		
5025	Monetary amount type code qualifier	M an..3	<b>M</b>	*	9 = Amount due/amount payable 57 = Equivalent amount
5004	Monetary amount	C n..35	<b>R</b>		
6345	Currency identification code	C an..3	<b>A</b>		ISO 4217 three alpha code When code value '9' is used in data element 5025 then the currency code specified in data element 6345 must be the same as that specified in DE 6345 of the MOA segment in segment group 5.
6343	Currency type code qualifier	C an..3	<b>N</b>		
4405	Status description code	C an..3	<b>N</b>		

Segment Notes:  
This segment is used to specify the payment amount for the credit instruction.

Example:  
MOA+9:50000:EUR'

## 5. Segments Layout

Segment number: 35

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>DTM</b>	- C	1	- Date/time/period

Function:  
To specify date, and/or time, or period.

		EDIFACT	GS1	*	Description
C507	DATE/TIME/PERIOD	M	<b>M</b>		
2005	Date or time or period function code qualifier	M an..3	<b>M</b>	*	140 = <b>Payment due date</b> 227 = <b>Beneficiary's banks due date</b> This code 140 identifies the date on which the funds should be made available to the beneficiary.
2380	Date or time or period value	C an..35	<b>R</b>		
2379	Date or time or period format code	C an..3	<b>R</b>		102 = <b>CCYYMMDD</b>

Segment Notes:  
This segment is used to specify dates relevant to the beneficiary's side of the credit instruction.  
  
Example:  
DTM+227:20020115:102'

## 5. Segments Layout

Segment number: 36

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>RFF</b>	- C	3 - Reference

Function:  
To specify a reference.

	EDIFACT	GS1	*	Description
C506 REFERENCE	M	<b>M</b>		
1153 Reference code qualifier	M an..3	<b>M</b>		<div>CR = <a href="#">Customer reference number</a> PQ = <a href="#">Payment reference</a> RA = <a href="#">Remittance advice number</a></div> <div>The code 'CR' is issued by the ordering customer for use by the banks to uniquely identify the credit transaction. This number may be quoted by the banks in subsequent messages in the payment chain. The code 'PQ' is issued by the ordering customer and passed to the beneficiary to uniquely identify the transaction for reconciliation purposes. When the code value 'RA' is used in this segment it will always relate to an external remittance advice which has been issued by the ordering party and communicated directly between two trading partners. It is recommended that only one remittance advice be specified per level C.</div>
1154 Reference identifier	C an..70	<b>R</b>		
1156 Document line identifier	C an..6	<b>N</b>		
4000 Reference version identifier	C an..35	<b>N</b>		
1060 Revision identifier	C an..6	<b>N</b>		

Segment Notes:

This segment is used to identify any references related to the payment order.

Should there be a requirement to cancel a payment order then the DE 1004 value from the BGM segment, the reference in group 4, and the reference in group 11 must be provided in the FINCAN message to ensure cancellation of the correct payment order.

Example:  
RFF+PQ:855144'



## 5. Segments Layout

Segment number: 37

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11	
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16	
<b>PAI</b>	- C	1 - Payment instructions	
Function: To specify the instructions for payment.			
	EDIFACT	GS1 * Description	
C534 PAYMENT INSTRUCTION DETAILS	M	<b>M</b>	
4439 Payment conditions code	C an..3	<b>N</b>	
4431 Payment guarantee means code	C an..3	<b>N</b>	
4461 Payment means code	C an..3	<b>R</b>	10 = In cash 21 = Banker's draft 23 = Bank cheque (issued by a banking or similar establishment) 26 = Local cheque 50 = Payment by postgiro  If the multiple payment order message is used to order the ordering customers bank to issue a cheque to the beneficiary then it is recommended that one of the code values '23', '26', and '50' in data element 4461 is used. The identification of the beneficiary is carried out in the NAD segment in group 13.
1131 Code list identification code	C an..17	<b>O</b>	
3055 Code list responsible agency code	C an..3	<b>D</b>	
4435 Payment channel code	C an..3	<b>O</b>	2 = Air mail 4 = Telex 5 = S.W.I.F.T. 8 = Fedwire 9 = Personal (face-to-face) 11 = Registered mail
Segment Notes:  This segment is used to specify the method of payment and the payment channel to be used. It is recommended that this segment is only used if no previous agreements are in place between trading partners, or the ordering customer/account holder and its bank.  Example: PAI+::26'			

## 5. Segments Layout

Segment number: 38

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>FCA</b>	- C	1 - Financial charges allocation

Function:

Description of allocation of charges.

	EDIFACT	GS1	*	Description
4471 Settlement means code	M an..3	<b>M</b>	*	13 = All charges borne by payee 14 = Each pay own cost 15 = All charges borne by payor When using code value '13' in this data element it is not recommended that C878 be used.
C878 CHARGE/ALLOWANCE ACCOUNT	C	<b>O</b>		
3434 Institution branch identifier	M an..17	<b>M</b>		
1131 Code list identification code	C an..17	<b>O</b>		25 = Bank identification 154 = Bank branch sorting identification
3055 Code list responsible agency code	C an..3	<b>D</b>		5 = ISO (International Organization for Standardization)
3194 Account holder identifier	C an..35	<b>O</b>		If this data element is not used the primary account (i.e. the ordering bank account) specified in the FII segment (group 6) should be used.
6345 Currency identification code	C an..3	<b>O</b>		ISO 4217 three alpha

Segment Notes:

This segment is used to identify the basis on which any charges are allocated and the account (of the ordering customer) to which the charges should be directed.

This segment must not be used if the charge allocation details have already been provided in the FCA segment in group 4.

Example:

FCA+15+DRESDEFF666:25:5'

## 5. Segments Layout

Segment number: 39

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG12</b>	- C	3	- FII
<b>FII</b>	- M	1	- Financial institution information

Function:  
To identify an account and a related financial institution.

		EDIFACT	GS1	*	Description
3035	Party function code qualifier	M an..3	<b>M</b>	*	BF = <b>Beneficiary's bank</b> BQ = <b>Cheque drawn bank</b> I1 = <b>Intermediary bank 1</b>
C078	ACCOUNT HOLDER IDENTIFICATION	C	<b>D</b>		When payment is being made by cheque the account details for the beneficiary are not required.
3194	Account holder identifier	C an..35	<b>R</b>		Beneficiary account number.
3192	Account holder name	C an..35	<b>O</b>		
3192	Account holder name	C an..35	<b>O</b>		
6345	Currency identification code	C an..3	<b>O</b>		ISO 4217 three alpha
C088	INSTITUTION IDENTIFICATION	C	<b>D</b>		C088: In some countries it is possible to identify within the account number the institution name and branch. Where this is possible the composite C088 will not be required. For international transactions it is recommended that the need for composite C088 should be checked before sending the message.
3433	Institution name code	C an..11	<b>A</b>		
1131	Code list identification code	C an..17	<b>O</b>		25 = <b>Bank identification</b>
3055	Code list responsible agency code	C an..3	<b>D</b>		5 = <b>ISO (International Organization for Standardization)</b> If an intermediary bank (I1) is identified in this data element then the identification of the beneficiary's bank (BF) must also always be provided.
3434	Institution branch identifier	C an..17	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		If an intermediary bank (I2) is identified in this data element then the identification of the beneficiary's bank (BF) must also always be provided.
3432	Institution name	C an..70	<b>O</b>		
3436	Institution branch location name	C an..70	<b>O</b>		
3207	Country name code	C an..3	<b>O</b>		ISO 3166 two alpha code

Segment Notes:  
This segment is used to identify the financial institution and account number of the beneficiary.  
The preferred way to identify a bank and its branch is in machine readable format using data elements 3433 and 3434. When using C088 it is recommended that if data element 3433 is not used that 3432 be used, and that when data element 3434 is not used that data element 3436 be used.

Example:  
FII+BF+994-3277711:N GEISS'  
The beneficiary is identified as being N Geiss with a bank account number of 994-3277711. In this example the identity of the bank is contained in the account number.

## 5. Segments Layout

Segment number: 40

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG13</b>	- C	3	- NAD-CTA-COM
<b>NAD</b>	- M	1	- Name and address

Function:  
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.

	EDIFACT	GS1	*	Description
3035 Party function code qualifier	M an..3	<b>M</b>		BE = <b>Beneficiary</b> BY = <b>Buyer</b> CQ = <b>Cheque order</b> OY = <b>Ordering customer</b> P1 = <b>Contact party 1</b> SU = <b>Supplier</b> The code 'OY' is only to be used to indicate situations where the ordering customer per beneficiary is different and the ordered bank (FII group 6) is the same ordered bank for all ordering customers. If the a different ordered bank is required then the B Level of the message must be repeated.
C082 PARTY IDENTIFICATION DETAILS	C	<b>A</b>		
3039 Party identifier	M an..35	<b>M</b>		For identification of parties it is recommended to use GLN - Format n13.
1131 Code list identification code	C an..17	<b>O</b>		
3055 Code list responsible agency code	C an..3	<b>R</b>	*	9 = <b>GS1</b>
C058 NAME AND ADDRESS	C	<b>O</b>		This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124 Name and address description	M an..35	<b>M</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
C080 PARTY NAME	C	<b>D</b>		
3036 Party name	M an..35	<b>M</b>		Party name in clear text.
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3045 Party name format code	C an..3	<b>O</b>		
C059 STREET	C	<b>D</b>		
3042 Street and number or post office box identifier	M an..35	<b>M</b>		Building Name/Number and Street Name
3042 Street and number or post office box identifier	C an..35	<b>O</b>		
3042 Street and number or post	C an..35	<b>O</b>		

## 5. Segments Layout

Segment number: 40

		EDIFACT	GS1	*	Description
	office box identifier				
3042	Street and number or post office box identifier	C an..35	<b>O</b>		
3164	City name	C an..35	<b>D</b>		City/Town name, clear text
C819	COUNTRY SUB-ENTITY DETAILS	C	<b>D</b>		
3229	Country sub-entity name code	C an..9	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>O</b>		
3228	Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251	Postal identification code	C an..17	<b>D</b>		Postal code
3207	Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code

### Segment Notes:

This segment is used to identify the beneficiary of the credit instruction and is passed on unchanged through the banking chain.

### Example:

NAD+CQ+++TOWER PACKAGING LTD+TOWER HOUSE:RUE HAUT:21+BRUSSELS++B1000+BE'

The cheque order party is identified in full (including address) as Tower Packaging.

NAD+BY+5412345000020::9'

The buyer is identified using the Global Location Number GLN 5412345000020.

### Dependency Notes:

The following composites and data elements are only used when a coded name and address can not be used.

The affected composites and data elements are as follows;

C080 - C059 - 3164 - C819 - 3251 - 3207

## 5. Segments Layout

Segment number: 41

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG13</b>	- C	3 - NAD-CTA-COM
<b>CTA</b>	- C	1 - Contact information

Function:				
To identify a person or a department to whom communication should be directed.				
		EDIFACT	GS1	* Description
3139	Contact function code	C an..3	<b>R</b>	IC = <a href="#">Information contact</a>
C056	DEPARTMENT OR EMPLOYEE DETAILS	C	<b>O</b>	
3413	Department or employee name code	C an..17	<b>O</b>	
3412	Department or employee name	C an..35	<b>O</b>	

Segment Notes:				
This segment is used to provide contact details relevant for the party identified in the previous NAD segment.				
Example:				
CTA+IC+:T. WRIGHT'				

## 5. Segments Layout

Segment number: 42

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG13</b>	- C	3 - NAD-CTA-COM
<b>COM</b>	- C	5 - Communication contact

Function:  
 To identify a communication number of a department or a person to whom communication should be directed.

	EDIFACT	GS1	*	Description
C076 COMMUNICATION CONTACT	M	<b>M</b>		
3148 Communication address identifier	Man..512	<b>M</b>		
3155 Communication address code qualifier	Man..3	<b>M</b>	*	CA = <b>Cable address</b> EI = <b>EDI</b> EM = <b>Electronic mail</b> FX = <b>Fax</b> TE = <b>Telephone</b> TL = <b>Telex</b>

Segment Notes:  
 This segment is used to provide communications details relevant to the contact identified in the CTA segment.

Example:  
 COM+003212187674:FX'

## 5. Segments Layout

Segment number: 43

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG14</b>	- C	3 - INP-FTX-DTM
<b>INP</b>	- M	1 - Parties and instruction

Function:

To specify parties to an instruction, the instruction, or both.

		EDIFACT	GS1	*	Description
C849	PARTIES TO INSTRUCTION	C	A		
3301	Enacting party identifier	M an..35	M		3 = <a href="#">Beneficiary's bank</a> YC7 = <a href="#">Ordered bank (SWIFT Code)</a>
3285	Instruction receiving party identifier	C an..35	O		4 = <a href="#">Beneficiary</a> 5 = <a href="#">Contact party 1</a> YC5 = <a href="#">Ordered bank (SWIFT Code)</a>
C522	INSTRUCTION	C	O		
4403	Instruction type code qualifier	M an..3	M		1 = <a href="#">Action required</a>
4401	Instruction description code	C an..3	O		AD = <a href="#">Advise</a> AP = <a href="#">Advise by phone</a> AJ = <a href="#">Advise by fax (SWIFT Code)</a> EX = <a href="#">Expedite</a>
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	D		
4400	Instruction description	C an..35	N		
C850	STATUS OF INSTRUCTION	C	N		
4405	Status description code	M an..3			
3036	Party name	C an..35			
1229	Action request/notification description code	C an..3	N		

Segment Notes:

This segment is used to identify the party who must carry out an instruction from the ordering customer, and the party to whom the instruction is intended.

This segment should not be used if the INP segment in segment group 8 was used.

DE's 3301 and 3285: As these data elements are being used to provide coded information it is recommended that their format and length be restricted to an..3.

Example:

INP+3:4+1:AP'



## 5. Segments Layout

Segment number: 44

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG14</b>	- C	3 - INP-FTX-DTM
<b>FTX</b>	- C	1 - Free text

Function:  
To provide free form or coded text information.

	EDIFACT	GS1	*	Description
4451 Text subject code qualifier	M an..3	<b>M</b>		AAG = <a href="#">Party instructions</a>
4453 Free text function code	C an..3	<b>N</b>		
C107 TEXT REFERENCE	C	<b>D</b>		This composite is only used when trading partners have agreed to use mutually defined code values.
4441 Free text value code	M an..17	<b>M</b>		Coded reference to standard text between partners.
1131 Code list identification code	C an..17	<b>O</b>		
3055 Code list responsible agency code	C an..3	<b>D</b>		86 = <a href="#">Assigned by party originating the message</a>
C108 TEXT LITERAL	C	<b>D</b>		This composite is only used if coded text can not be used.
4440 Free text value	M an..512	<b>M</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
3453 Language name code	C an..3	<b>D</b>		ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447 Free text format code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to provide additional coded or free text instructions to those provided in the INP segment. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.

Example:  
FTX+AAG+++IF INSUFFICIENT FUNDS IN NUMBER 1 ACCOUNT USE NUMBER 2'

## 5. Segments Layout

Segment number: 45

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG14</b>	- C	3 - INP-FTX-DTM
<b>DTM</b>	- C	2 - Date/time/period
Function:		
To specify date, and/or time, or period.		
	EDIFACT	GS1 * Description
C507 DATE/TIME/PERIOD	M	<b>M</b>
2005 Date or time or period function code qualifier	M an..3	<b>M</b> 174 = <a href="#">Advise after date/time</a> 175 = <a href="#">Advise before date/time</a> 177 = <a href="#">Advise on date/time</a> 273 = <a href="#">Validity period</a>
2380 Date or time or period value	C an..35	<b>R</b>
2379 Date or time or period format code	C an..3	<b>R</b> 102 = <a href="#">CCYYMMDD</a> 718 = <a href="#">CCYYMMDD-CCYYMMDD</a>
Segment Notes:		
This segment is used to specify the earliest and latest dates by which the instructions must be carried out.		
Example:		
DTM+175:200206171000:203'		
Advise before 10am on the 17th of June 2002.		

## 5. Segments Layout

Segment number: 46

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG15</b>	- C	10	- GIS-MOA-LOC-NAD-RCS-FTX
<b>GIS</b>	- M	1	- General indicator

Function:  
 To transmit a processing indicator.

Notes:  
 1. This segment will be removed effective with directory D.02B.

		EDIFACT	GS1	*	Description
C529	PROCESSING INDICATOR	M	<b>M</b>		
7365	Processing indicator description code	M an..3	<b>M</b>	*	10 = Declaration requested
1131	Code list identification code	C an..17	<b>N</b>		
3055	Code list responsible agency code	C an..3	<b>N</b>		
7187	Process type description code	C an..17	<b>N</b>		

Segment Notes:  
 This segment is used to indicate that the information contained in the following segments will be passed on to and processed by the central and regulatory party identified in the NAD segment.  
 This segment should not be used if the GIS segment in segment group 9 has already been used.  
 Note: The use of this segment group is subject to domestic regulations stipulated by regulatory authorities, e.g. Central Bank.

Example:  
 GIS+10'

## 5. Segments Layout

Segment number: 47

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG15</b>	- C	10	- GIS-MOA-LOC-NAD-RCS-FTX
<b>MOA</b>	- C	1	- Monetary amount

Function:

To specify a monetary amount.

		EDIFACT	GS1	*	Description
C516	MONETARY AMOUNT	M	<b>M</b>		
5025	Monetary amount type code qualifier	M an..3	<b>M</b>		9 = <a href="#">Amount due/amount payable</a>
5004	Monetary amount	C n..35	<b>R</b>		
6345	Currency identification code	C an..3	<b>O</b>		ISO 4217 three alpha code
6343	Currency type code qualifier	C an..3	<b>O</b>		11 = <a href="#">Payment currency</a>
4405	Status description code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to specify monetary amounts which must be reported to the regulatory party identified in the NAD segment.

Example:

MOA+9:125000:EUR:11'

## 5. Segments Layout

Segment number: 48

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11	
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16	
<b>SG15</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX	
<b>LOC</b>	- C	2 - Place/location identification	
Function: To identify a place or a location and/or related locations.			
	EDIFACT	GS1 * Description	
3227 Location function code qualifier	M an..3	<b>M</b> 27 = Country of origin 28 = Country of destination of goods 39 = Country of production 40 = Country of trading	
C517 LOCATION IDENTIFICATION	C	<b>A</b>	
3225 Location name code	C an..25	<b>A</b>	For country identification see ISO 3166 two alpha code, DE 3207.
1131 Code list identification code	C an..17	<b>O</b>	
3055 Code list responsible agency code	C an..3	<b>D</b>	5 = ISO (International Organization for Standardization) 9 = GS1 DE 3055 must be used if DE 3225 is used and does not contain an UN/LOCODE.
3224 Location name	C an..256	<b>O</b>	
C519 RELATED LOCATION ONE IDENTIFICATION	C	<b>N</b>	
3223 First related location name code	C an..25		
1131 Code list identification code	C an..17		
3055 Code list responsible agency code	C an..3		
3222 First related location name	C an..70		
C553 RELATED LOCATION TWO IDENTIFICATION	C	<b>N</b>	
3233 Second related location name code	C an..25		
1131 Code list identification code	C an..17		
3055 Code list responsible agency code	C an..3		
3232 Second related location name	C an..70		
5479 Relation code	C an..3	<b>N</b>	
Segment Notes: This segment is used to indicate any locations relevant to the regulatory party identified in the NAD segment. Example: LOC+39+BE::5' Goods were produced in Belgium.			

## 5. Segments Layout

Segment number: 49

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG15</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>NAD</b>	- C	1 - Name and address

Function:  
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.

	EDIFACT	GS1	*	Description
3035 Party function code qualifier	M an..3	<b>M</b>	*	RA = <b>Central bank or regulatory authority</b>
C082 PARTY IDENTIFICATION DETAILS	C	<b>A</b>		
3039 Party identifier	M an..35	<b>M</b>		For identification of parties it is recommended to use GLN - Format n13.
1131 Code list identification code	C an..17	<b>O</b>		
3055 Code list responsible agency code	C an..3	<b>R</b>	*	9 = <b>GS1</b>
C058 NAME AND ADDRESS	C	<b>O</b>		This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124 Name and address description	M an..35	<b>M</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
3124 Name and address description	C an..35	<b>O</b>		
C080 PARTY NAME	C	<b>D</b>		
3036 Party name	M an..35	<b>M</b>		Party name in clear text.
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3036 Party name	C an..35	<b>O</b>		
3045 Party name format code	C an..3	<b>O</b>		
C059 STREET	C	<b>D</b>		
3042 Street and number or post office box identifier	M an..35	<b>M</b>		Building Name/Number and Street
3042 Street and number or post office box identifier	C an..35	<b>O</b>		Name and/or P.O. Box.
3042 Street and number or post office box identifier	C an..35	<b>O</b>		
3042 Street and number or post office box identifier	C an..35	<b>O</b>		
3164 City name	C an..35	<b>D</b>		City/town name, clear text.
C819 COUNTRY SUB-ENTITY DETAILS	C	<b>D</b>		
3229 Country sub-entity name code	C an..9	<b>O</b>		
1131 Code list identification code	C an..17	<b>O</b>		

## 5. Segments Layout

---

Segment number: 49

		EDIFACT	GS1	*	Description
3055	Code list responsible agency code	C an..3	<b>O</b>		
3228	Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251	Postal identification code	C an..17	<b>D</b>		Postal code.
3207	Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code

### Segment Notes:

This segment is used to identify the central and regulatory authority specifying the regulatory information detailed in the GIS and FTX segments.

### Example:

NAD+RA+5422331123459::9'

### Dependency Notes:

The following composites and data elements are only used when a coded name and address can not be used.

The affected composites and data elements are as follows;

C080 - C059 - 3164 - C819 - 3251 - 3207

## 5. Segments Layout

Segment number: 50

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG15</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>RCS</b>	- C	1 - Requirements and conditions

Function:  
To specify sector/subject requirements and conditions.

		EDIFACT	GS1	*	Description
7293	Sector area identification code qualifier	M an..3	<b>M</b>	*	25 = <b>Banking sector</b>
C550	REQUIREMENT/CONDITION IDENTIFICATION	C	<b>A</b>		
7295	Requirement or condition description identifier	M an..17	<b>M</b>		As no EDIFACT code values exist for this data element it is recommended that nationally agreed codes be formulated to identify the requirements and conditions possible due to regulatory requirements.
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		86 = <b>Assigned by party originating the message</b>
7294	Requirement or condition description	C an..35	<b>O</b>		
1229	Action request/notification description code	C an..3	<b>N</b>		
3207	Country name code	C an..3	<b>N</b>		

Segment Notes:  
This segment is used to indicate any requirements and conditions related to the transaction which is being reported to the regulatory authorities.  
Example:  
RCS+25+AB1::86'  
Code assigned by the message sender indicating that the requirements and conditions relate to regulatory requirements to report the payment of amount in excess of a certain amount.



## 5. Segments Layout

Segment number: 51

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG15</b>	- C	10 - GIS-MOA-LOC-NAD-RCS-FTX
<b>FTX</b>	- C	10 - Free text

Function:  
To provide free form or coded text information.

	EDIFACT	GS1	*	Description
4451 Text subject code qualifier	M an..3	<b>M</b>	*	REG = <b>Regulatory information</b>
4453 Free text function code	C an..3	<b>N</b>		
C107 TEXT REFERENCE	C	<b>D</b>		This composite is only used when trading partners have agreed to use mutually defined code values.
4441 Free text value code	M an..17	<b>M</b>		A code identifying standard text agreed between partners.
1131 Code list identification code	C an..17	<b>O</b>		
3055 Code list responsible agency code	C an..3	<b>D</b>		
C108 TEXT LITERAL	C	<b>D</b>		This composite is only used if coded text can not be used.
4440 Free text value	M an..512	<b>M</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
3453 Language name code	C an..3	<b>D</b>		ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447 Free text format code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to provide free or coded text information required by the regulatory authorities. The form and content of this segment is dependent upon the central bank or regulatory authority's requirements. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.

Example:  
FTX+REG+++SUBJECT TO EUROPEAN CENTRAL BANK REGULATIONS'

## 5. Segments Layout

Segment number: 52

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11		
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16		
<b>SG16</b>	- C	1	- PRC-FTX-SG17-SG23		
<b>PRC</b>	- M	1	- Process identification		
Function: To identify a process.					
		EDIFACT	GS1	*	Description
C242	PROCESS TYPE AND DESCRIPTION	C	R		
7187	Process type description code	Man..17	M	*	<div>8 = Processing of structured information</div> <div>9 = Processing of identical information in structured and unstructured form</div> <div>10 = Processing of different information in structured and unstructured form</div> <div>11 = Processing of unstructured information</div> <div>8 - The information following this segment is presented in a structured format using segments such as the DOC and MOA in segment group 17.</div> <div>9 - The information following this segment is presented in both an unstructured format, and has the same content and meaning, using the following FTX segment, and a structured format using segments such as the DOC and MOA in segment group 17. This code is required so as the receiving bank can decide which format (EDIFACT or SWIFT) to use when transmitting the information to the beneficiary's bank.</div> <div>10 - The information following this segment is presented in both an unstructured format, using the following FTX segment, and in a structured format using segments such as the DOC and MOA in segment group 17. The information presented in the structured and unstructured format is not identical. This code is required to allow the receiving bank to decide which format to use when transmitting the information to the beneficiary's bank while understanding the risks of possible losses due to the difference in data content.</div> <div>11 - The information following this segment is presented in an unstructured format using the following FTX segment.</div>
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	O		
7186	Process type description	C an..35	O		
7186	Process type description	C an..35	O		
C830	PROCESS IDENTIFICATION DETAILS	C	N		
7191	Process description code	C an..17			
1131	Code list identification code	C an..17			
3055	Code list responsible agency code	C an..3			

## 5. Segments Layout

---

Segment number: 52

	EDIFACT	GS1	*	Description
7190 Process description	C an..70			
<p>Segment Notes:</p> <p>This segment is used to provide processing information related to the credit instruction. It should be noted that information sent in groups 16 through 23 is generated by the ordering party and is simply forwarded to the beneficiary via the intermediary bank(s) without amendment.</p> <p>Example: PRC+8'</p>				

## 5. Segments Layout

Segment number: 53

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>FTX</b>	- C	5 - Free text

Function:  
To provide free form or coded text information.

	EDIFACT	GS1	*	Description
4451 Text subject code qualifier	M an..3	<b>M</b>		PMD = <a href="#">Payment detail/remittance information</a>
4453 Free text function code	C an..3	<b>N</b>		
C107 TEXT REFERENCE	C	<b>D</b>		This composite is only used when trading partners have agreed to use mutually defined code values.
4441 Free text value code	M an..17	<b>M</b>		A code identifying standard text agreed between trading partners.
1131 Code list identification code	C an..17	<b>O</b>		
3055 Code list responsible agency code	C an..3	<b>D</b>		
C108 TEXT LITERAL	C	<b>D</b>		This composite is only used if coded text can not be used.
4440 Free text value	M an..512	<b>M</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
4440 Free text value	C an..512	<b>O</b>		
3453 Language name code	C an..3	<b>D</b>		ISO 639 two alpha code. This data element is only used when non coded free text has been provided in data element C108.
4447 Free text format code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to provide free or coded text information related to the processing of the payment. Use of this segment in free form is not recommended since in most cases it inhibits automatic processing of the multiple payment order. Coded references to standard texts is an available functionality which enables automatic processing and reduces transmission and processing overheads. Standard texts should be mutually defined among trading partners and can be used to cover legal and other requirements.

Example:  
FTX+PMD+++PAYMENT RELATES TO ACCUMULATED INVOICES JAN 1995'

## 5. Segments Layout

Segment number: 54

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>DOC</b>	- M	1 - Document/message details

Function:  
To identify documents and details directly related to it.

		EDIFACT	GS1	*	Description
C002	DOCUMENT/MESSAGE NAME	M	M		
1001	Document name code	C an..3	R		82 = Metered services invoice 83 = Credit note related to financial adjustments 84 = Debit note related to financial adjustments 380 = Commercial invoice 381 = Credit note - goods and services 383 = Debit note - goods and services 385 = Consolidated invoice 386 = Prepayment invoice 389 = Self-billed invoice 390 = Delcredere invoice
1131	Code list identification code	C an..17	N		
3055	Code list responsible agency code	C an..3	D	*	9 = <b>GS1</b> This data element is only used if the GS1 code values are used in data element 1001.
1000	Document name	C an..35	O		
C503	DOCUMENT/MESSAGE DETAILS	C	R		
1004	Document identifier	C an..35	R		
1373	Document status code	C an..3	O		2 = Accompanying goods 4 = To arrive by separate EDI message 6 = To arrive by manual means
1366	Document source description	C an..70	N		
3453	Language name code	C an..3	O		ISO 639 two alpha code.
1056	Version identifier	C an..9	N		
1060	Revision identifier	C an..6	N		
3153	Communication medium type code	C an..3	N		
1220	Document copies required quantity	C n..2	N		
1218	Document originals required quantity	C n..2	N		

Segment Notes:  
This segment is used to provide details of the documents, e.g. a group of invoices, to which the multiple payment order refers.  
This information is generated by the party making the payment and must be included at least once in the Multiple Payment Order message. Individual document line item information is provided in the DLI segment.

## **5. Segments Layout**

---

Segment number: 54

Example: DOC+380+43534'
----------------------------

## 5. Segments Layout

Segment number: 55

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>MOA</b>	- C	5 - Monetary amount
Function:		
To specify a monetary amount.		
	EDIFACT	GS1 * Description
C516 MONETARY AMOUNT	M	<b>M</b>
5025 Monetary amount type code qualifier	M an..3	<b>M</b> 11 = Amount paid 12 = Amount remitted 39 = Invoice total amount 52 = Discount amount 53 = Discount amount due 109 = Payment discount amount 126 = To collect 128 = Total amount 139 = Total payment amount 143 = Transfer amount When used in conjunction with code 481 in data element 1001 of the DOC segment only the amount remitted (code 12) should be used here. When used with all other codes in data element 1001 in the DOC segment it is recommended that the invoice total amount (code 39) and the amount remitted (code 12) be included in this data element.
5004 Monetary amount	C n..35	<b>R</b>
6345 Currency identification code	C an..3	<b>N</b>
6343 Currency type code qualifier	C an..3	<b>N</b>
4405 Status description code	C an..3	<b>N</b>
Segment Notes:		
This segment is used to specify monetary amounts related to the complete document identified in the previous DOC segment.		
Example: MOA+12:15677'		





## 5. Segments Layout

Segment number: 57

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1	- PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999	- DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>RFF</b>	- C	5	- Reference

Function:  
To specify a reference.

		EDIFACT	GS1	*	Description
C506	REFERENCE	M	M		
1153	Reference code qualifier	M an..3	M		AAB = <a href="#">Proforma invoice number</a> AAJ = <a href="#">Delivery order number</a> AAK = <a href="#">Despatch advice number</a> CD = <a href="#">Credit note number</a> CR = <a href="#">Customer reference number</a> CT = <a href="#">Contract number</a> DL = <a href="#">Debit note number</a> DQ = <a href="#">Delivery note number</a> IV = <a href="#">Invoice number</a> ON = <a href="#">Order number (buyer)</a> PL = <a href="#">Price list number</a> POR = <a href="#">Purchase order response number</a> PP = <a href="#">Purchase order change number</a> VN = <a href="#">Order number (supplier)</a>
1154	Reference identifier	C an..70	R		
1156	Document line identifier	C an..6	N		
4000	Reference version identifier	C an..35	N		
1060	Revision identifier	C an..6	N		

Segment Notes:  
This segment is used to provide any additional references relevant to the currently identified DOC segment.  
  
Example:  
RFF+ON:A-7664'

## 5. Segments Layout

Segment number: 58

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>NAD</b>	- C	2 - Name and address
Function:		
To specify the name/address and their related function, either by C082 only and/or unstructured by C058 or structured by C080 thru 3207.		
	EDIFACT	GS1 * Description
3035 Party function code qualifier	M an..3	<b>M</b> BY = Buyer DP = Delivery party II = Issuer of invoice IV = Invoicee SU = Supplier UD = Ultimate customer
C082 PARTY IDENTIFICATION DETAILS	C	<b>A</b>
3039 Party identifier	M an..35	<b>M</b> For identification of parties it is recommended to use GLN - Format n13.
1131 Code list identification code	C an..17	<b>O</b>
3055 Code list responsible agency code	C an..3	<b>R</b> * 9 = <b>GS1</b>
C058 NAME AND ADDRESS	C	<b>O</b> This composite may only be used to fulfill the requirements of directive 2003/58/EC, article 4.
3124 Name and address description	M an..35	<b>M</b>
3124 Name and address description	C an..35	<b>O</b>
3124 Name and address description	C an..35	<b>O</b>
3124 Name and address description	C an..35	<b>O</b>
3124 Name and address description	C an..35	<b>O</b>
C080 PARTY NAME	C	<b>D</b>
3036 Party name	M an..35	<b>M</b> Party name in clear text.
3036 Party name	C an..35	<b>O</b>
3036 Party name	C an..35	<b>O</b>
3036 Party name	C an..35	<b>O</b>
3036 Party name	C an..35	<b>O</b>
3045 Party name format code	C an..3	<b>O</b>
C059 STREET	C	<b>D</b>
3042 Street and number or post office box identifier	M an..35	<b>M</b> Building name/number and street name.
3042 Street and number or post office box identifier	C an..35	<b>O</b>
3042 Street and number or post office box identifier	C an..35	<b>O</b>
3042 Street and number or post office box identifier	C an..35	<b>O</b>

## 5. Segments Layout

Segment number: 58

		EDIFACT	GS1	*	Description
3164	City name	C an..35	<b>D</b>		City/town name, clear text.
C819	COUNTRY SUB-ENTITY DETAILS	C	<b>D</b>		
3229	Country sub-entity name code	C an..9	<b>O</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>O</b>		
3228	Country sub-entity name	C an..70	<b>O</b>		County/State, clear text.
3251	Postal identification code	C an..17	<b>D</b>		Postal code
3207	Country name code	C an..3	<b>D</b>		ISO 3166 two alpha code

### Segment Notes:

This segment is used to identify any additional parties related to the currently identified document, e.g. delivery party.

### Example:

NAD+DP+507161511110::9'

### Dependency Notes:

The following composites and data elements are only used when a coded name and address can not be used.

The affected composites and data elements are as follows;

C080 - C059 - 3164 - C819 - 3251 - 3207

## 5. Segments Layout

Segment number: 59

<b>SG4</b>	- M	9999	- LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999	- SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1	- PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999	- DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG18</b>	- C	5	- CUX-DTM
<b>CUX</b>	- M	1	- Currencies

Function:  
To specify currencies used in the transaction and relevant details for the rate of exchange.

	EDIFACT	GS1	*	Description
C504 CURRENCY DETAILS	C	R		
6347 Currency usage code qualifier	M an..3	M	*	2 = <b>Reference currency</b>
6345 Currency identification code	C an..3	R		ISO 4217 three alpha
6343 Currency type code qualifier	C an..3	R	*	11 = <b>Payment currency</b>
6348 Currency rate value	C n..4	N		
C504 CURRENCY DETAILS	C	D		The second occurrence of this composite is only used if a target currency is being specified.
6347 Currency usage code qualifier	M an..3	M	*	3 = <b>Target currency</b>
6345 Currency identification code	C an..3	R		ISO 4217 three alpha
6343 Currency type code qualifier	C an..3	R		4 = <b>Invoicing currency</b>
6348 Currency rate value	C n..4	N		
5402 Currency exchange rate	C n..12	D		The rate of exchange is only used if a target currency has been identified in the second occurrence of C504.
6341 Exchange rate currency market identifier	C an..3	N		

Segment Notes:

This segment is used to provide currency rate of exchange information used to convert amounts specified in the MOA segment for the referenced document, to an amount expressed in terms of the remittance/payment currency. This CUX segment will only be used when the currency of its rate of exchange is different from the default global currency or its rate of exchange specified in the CUX segment at heading level.

When specifying the Reference and Target currencies for international trade, one occurrence of CUX is all that is required. The reference currency is identified in the first occurrence of composite C504, with the target currency specified in the second occurrence of C504. The rate of exchange between the two is detailed in DE 5402.

The general rule for calculating the rate of exchange is as follows;  
Reference Currency multiplied by Rate = Target Currency.

Example:  
CUX+2:EUR:11+3:USD:4+51.25'

## 5. Segments Layout

Segment number: 60

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG18</b>	- C	5 - CUX-DTM
<b>DTM</b>	- C	1 - Date/time/period

Function:  
To specify date, and/or time, or period.

		EDIFACT	GS1	*	Description
C507	DATE/TIME/PERIOD	M	<b>M</b>		
2005	Date or time or period function code qualifier	M an..3	<b>M</b>	*	134 = <b>Rate of exchange date/time</b> 273 = <b>Validity period</b>
2380	Date or time or period value	C an..35	<b>R</b>		
2379	Date or time or period format code	C an..3	<b>R</b>		102 = <b>CCYYMMDD</b> 718 = <b>CCYYMMDD-CCYYMMDD</b>

Segment Notes:  
This segment is used to specify any dates related to the currency information specified in the previous CUX segment.

Example:  
DTM+134:19950401:102'

## 5. Segments Layout

Segment number: 61

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG19</b>	- C	100 - AJT-MOA-RFF
<b>AJT</b>	- M	1 - Adjustment details

Function:  
To identify the reason for an adjustment.

	EDIFACT	GS1	*	Description
4465 Adjustment reason description code	M an..3	<b>M</b>		<div>1 = <a href="#">Agreed settlement</a></div> <div>2 = <a href="#">Below specification goods</a></div> <div>3 = <a href="#">Damaged goods</a></div> <div>4 = <a href="#">Short delivery</a></div> <div>5 = <a href="#">Price query</a></div> <div>6 = <a href="#">Proof of delivery required</a></div> <div>9 = <a href="#">Invoice error</a></div> <div>14 = <a href="#">Wrong delivery</a></div> <div>17 = <a href="#">Transport damage</a></div> <div>20 = <a href="#">Discount for late delivery</a></div> <div>21 = <a href="#">Advertising costs</a></div> <div>32 = <a href="#">Goods not delivered</a></div> <div>38 = <a href="#">Deducted bonus</a></div> <div>52 = <a href="#">Wrong invoice</a></div> <div>67 = <a href="#">Delcredere costs</a></div> <div>68 = <a href="#">Early payment allowance adjustment</a></div> <div>If adjustments are made due to national tax practices then code values to identify these national practices may be allocated for use with this data element by individual Numbering Organisations.</div>
1082 Line item identifier	C an..6	<b>N</b>		

Segment Notes:  
  
This segment is used to indicate the reason for an adjustment to the current document.  
Adjustments can be given for the whole referenced document identified in the DOC segment and additionally, can also be given per line item in the following DLI segment group.

Example:  
AJT+4'

## 5. Segments Layout

Segment number: 62

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG19</b>	- C	100 - AJT-MOA-RFF
<b>MOA</b>	- M	1 - Monetary amount

Function:  
To specify a monetary amount.

	EDIFACT	GS1	*	Description
C516 MONETARY AMOUNT	M	<b>M</b>		
5025 Monetary amount type code qualifier	M an..3	<b>M</b>	*	5 = Adjusted amount 165 = Adjustment amount
5004 Monetary amount	C n..35	<b>R</b>		
6345 Currency identification code	C an..3	<b>N</b>		
6343 Currency type code qualifier	C an..3	<b>N</b>		
4405 Status description code	C an..3	<b>N</b>		

Segment Notes:  
This segment is used to indicate the value of the adjusted amount for the current document. Adjustment amounts may be given for information purposes only, i.e. not for calculation. The adjustment amount will not necessarily equal the difference between the amount due and the amount remitted.

Example:  
MOA+5:8700'

## 5. Segments Layout

Segment number: 63

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG19</b>	- C	100 - AJT-MOA-RFF
<b>RFF</b>	- C	1 - Reference

Function:  
To specify a reference.

		EDIFACT	GS1	*	Description
C506	REFERENCE	M	<b>M</b>		
1153	Reference code qualifier	M an..3	<b>M</b>		AAK = <a href="#">Despatch advice number</a> ON = <a href="#">Order number (buyer)</a> PL = <a href="#">Price list number</a> PP = <a href="#">Purchase order change number</a> POR = <a href="#">Purchase order response number</a> VN = <a href="#">Order number (supplier)</a>
1154	Reference identifier	C an..70	<b>R</b>		
1156	Document line identifier	C an..6	<b>N</b>		
4000	Reference version identifier	C an..35	<b>N</b>		
1060	Revision identifier	C an..6	<b>N</b>		

Segment Notes:

This segment is used to specify any references associated with the adjusted amounts.  
If specific references or information related to a line item number in a document are required then this information is provided in the AJT segment group (group 11) at DLI level.

Example:  
RFF+PL:JAN-1995'



## 5. Segments Layout

Segment number: 64

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22
<b>DLI</b>	- M	1 - Document line identification
Function:		
To specify the processing mode of a specific line within a referenced document.		
	EDIFACT	GS1 * Description
1073 Document line action code	M an..3	<b>M</b> 1 = <a href="#">Included in document/transaction</a> 2 = <a href="#">Excluded from document/transaction</a>
1082 Line item identifier	M an..6	<b>M</b>
Segment Notes:		
This segment is used to identify individual line items within the document identified in the DOC segment.		
Example:		
DLI+2+55'		

## 5. Segments Layout

Segment number: 65

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22
<b>MOA</b>	- M	5 - Monetary amount

Function:  
To specify a monetary amount.

	EDIFACT	GS1	*	Description
C516 MONETARY AMOUNT	M	<b>M</b>		
5025 Monetary amount type code qualifier	M an..3	<b>M</b>		12 = <a href="#">Amount remitted</a> 38 = <a href="#">Invoice item amount</a> 52 = <a href="#">Discount amount</a> 53 = <a href="#">Discount amount due</a> 109 = <a href="#">Payment discount amount</a> 143 = <a href="#">Transfer amount</a> 203 = <a href="#">Line item amount</a>
5004 Monetary amount	C n..35	<b>R</b>		
6345 Currency identification code	C an..3	<b>O</b>		
6343 Currency type code qualifier	C an..3	<b>N</b>		
4405 Status description code	C an..3	<b>N</b>		

Segment Notes:  
This segment is used to indicate the line item amount and the amount remitted for the line item identified in the DLI segment for the current document.

Example:  
MOA+12:4500'  
MOA+38:52000'

## 5. Segments Layout

Segment number: 66

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11			
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16			
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23			
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20			
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22			
<b>PIA</b>	- C	5 - Additional product id			
Function:					
To specify additional or substitutional item identification codes.					
		EDIFACT	GS1	*	Description
4347	Product identifier code qualifier	M an..3	<b>M</b>	*	5 = <b>Product identification</b>
C212	ITEM NUMBER IDENTIFICATION	M	<b>M</b>		
7140	Item identifier	C an..35	<b>R</b>		Number of the article for which the adjustment details are provided.
7143	Item type identification code	C an..3	<b>R</b>		AC = <b>HIBC (Health Industry Bar Code)</b> IB = <b>ISBN (International Standard Book Number)</b> IN = <b>Buyer's item number</b> SA = <b>Supplier's article number</b> SRV = <b>GS1 Global Trade Item Number</b>
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		9 = <b>GS1</b> 91 = <b>Assigned by supplier or supplier's agent</b> 92 = <b>Assigned by buyer or buyer's agent</b>
C212	ITEM NUMBER IDENTIFICATION	C	<b>O</b>		
7140	Item identifier	C an..35	<b>R</b>		
7143	Item type identification code	C an..3	<b>R</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		
C212	ITEM NUMBER IDENTIFICATION	C	<b>O</b>		
7140	Item identifier	C an..35	<b>R</b>		
7143	Item type identification code	C an..3	<b>R</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		
C212	ITEM NUMBER IDENTIFICATION	C	<b>O</b>		
7140	Item identifier	C an..35	<b>R</b>		
7143	Item type identification code	C an..3	<b>R</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		
C212	ITEM NUMBER IDENTIFICATION	C	<b>O</b>		
7140	Item identifier	C an..35	<b>R</b>		
7143	Item type identification code	C an..3	<b>R</b>		
1131	Code list identification code	C an..17	<b>O</b>		
3055	Code list responsible agency code	C an..3	<b>D</b>		

## 5. Segments Layout

---

Segment number: 66

		EDIFACT	GS1	*	Description
C212	ITEM NUMBER IDENTIFICATION	C	O		
7140	Item identifier	C an..35	R		
7143	Item type identification code	C an..3	R		
1131	Code list identification code	C an..17	O		
3055	Code list responsible agency code	C an..3	D		

**Segment Notes:**

This segment is used to provide the product identification of the line item detailed in the DLI segment for the current document.

Example:

PIA+5+3323456007803:SRV'

## 5. Segments Layout

Segment number: 67

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22
<b>SG22</b>	- C	10 - AJT-MOA-RFF
<b>AJT</b>	- M	1 - Adjustment details

Function:  
To identify the reason for an adjustment.

	EDIFACT	GS1	*	Description
4465 Adjustment reason description code	M an..3	<b>M</b>		1 = <a href="#">Agreed settlement</a> 2 = <a href="#">Below specification goods</a> 3 = <a href="#">Damaged goods</a> 4 = <a href="#">Short delivery</a> 5 = <a href="#">Price query</a> 6 = <a href="#">Proof of delivery required</a> 9 = <a href="#">Invoice error</a> 14 = <a href="#">Wrong delivery</a> 17 = <a href="#">Transport damage</a> 20 = <a href="#">Discount for late delivery</a> 32 = <a href="#">Goods not delivered</a> If adjustments are made due to national tax practices then code values to identify these national practices may be allocated for use with this data element by individual Numbering Organisations.
1082 Line item identifier	C an..6	<b>N</b>		

Segment Notes:  
This segment is used to indicate the reason for an adjustment to the current line identified in the DLI segment.

Example:  
AJT+3'

## 5. Segments Layout

Segment number: 68

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22
<b>SG22</b>	- C	10 - AJT-MOA-RFF
<b>MOA</b>	- M	1 - Monetary amount

Function:  
To specify a monetary amount.

	EDIFACT	GS1	*	Description
C516 MONETARY AMOUNT	M	<b>M</b>		
5025 Monetary amount type code qualifier	M an..3	<b>M</b>	*	5 = <b>Adjusted amount</b> 165 = <b>Adjustment amount</b>
5004 Monetary amount	C n..35	<b>R</b>		
6345 Currency identification code	C an..3	<b>N</b>		
6343 Currency type code qualifier	C an..3	<b>N</b>		
4405 Status description code	C an..3	<b>N</b>		

Segment Notes:

This segment is used to indicate the value of the adjusted amount for the current line item. Adjustment amounts may be provided for information purposes only, e.g. not for calculation. The adjustment amount will not necessarily equal the difference between the amount due and the amount remitted. The adjustment amount will always be expressed in terms of the remittance/payment currency.

Example:  
MOA+5:4920'

## 5. Segments Layout

Segment number: 69

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG17</b>	- C	9999 - DOC-MOA-DTM-RFF-NAD-SG18-SG19-SG20
<b>SG20</b>	- C	1000 - DLI-MOA-PIA-SG22
<b>SG22</b>	- C	10 - AJT-MOA-RFF
<b>RFF</b>	- C	1 - Reference

Function:  
To specify a reference.

	EDIFACT	GS1	*	Description
C506 REFERENCE	M	<b>M</b>		
1153 Reference code qualifier	M an..3	<b>M</b>		ON = Order number (buyer) PL = Price list number PP = Purchase order change number POR = Purchase order response number VN = Order number (supplier)
1154 Reference identifier	C an..70	<b>R</b>		
1156 Document line identifier	C an..6	<b>O</b>		
4000 Reference version identifier	C an..35	<b>N</b>		
1060 Revision identifier	C an..6	<b>N</b>		

Segment Notes:  
This segment is used to specify any references associated with the adjustment amounts for the current line item.

Example:  
RFF+PP:6522'

## 5. Segments Layout

Segment number: 70

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG23</b>	- C	1 - GIS-MOA
<b>GIS</b>	- M	1 - General indicator

Function:				
To transmit a processing indicator.				
Notes:				
1. This segment will be removed effective with directory D.02B.				

		EDIFACT	GS1	*	Description
C529	PROCESSING INDICATOR	M	<b>M</b>		
7365	Processing indicator description code	M an..3	<b>M</b>	*	37 = <b>Complete information</b>
1131	Code list identification code	C an..17	<b>N</b>		
3055	Code list responsible agency code	C an..3	<b>N</b>		
7187	Process type description code	C an..17	<b>N</b>		

Segment Notes:				
This segment is used to indicate the end of the detail of payment.				
It is recommended that this segment always be included in order to explicitly indicate the end of the payment details.				
Example:				
GIS+37'				



## 5. Segments Layout

Segment number: 71

<b>SG4</b>	- M	9999 - LIN-DTM-RFF-BUS-FCA-SG5-SG6-SG7-SG8-SG9-SG10-SG11
<b>SG11</b>	- M	99999 - SEQ-MOA-DTM-RFF-PAI-FCA-SG12-SG13-SG14-SG15-SG16
<b>SG16</b>	- C	1 - PRC-FTX-SG17-SG23
<b>SG23</b>	- C	1 - GIS-MOA
<b>MOA</b>	- C	5 - Monetary amount

Function:  
To specify a monetary amount.

	EDIFACT	GS1	*	Description
C516 MONETARY AMOUNT	M	<b>M</b>		
5025 Monetary amount type code qualifier	M an..3	<b>M</b>		128 = <a href="#">Total amount</a>
5004 Monetary amount	C n..35	<b>R</b>		
6345 Currency identification code	C an..3	<b>N</b>		
6343 Currency type code qualifier	C an..3	<b>N</b>		
4405 Status description code	C an..3	<b>N</b>		

Segment Notes:  
This segment is used to indicate the total value level C for control purposes. The figure detailed here is simply an accumulation of the values specified in all MOA segments in level C regardless of the qualifiers used in DE 5025.

Example:  
MOA+128:25601'

## 5. Segments Layout

Segment number: 72

<b>CNT</b> - C 5 - Control total				
Function: To provide control total.				
	EDIFACT	GS1	*	Description
C270 CONTROL	M	<b>M</b>		
6069 Control total type code qualifier	M an..3	<b>M</b>		2 = Number of line items in message 40 = Total number of sequence details in message
6066 Control total value	M n..18	<b>M</b>		
6411 Measurement unit code	C an..3	<b>O</b>		
Segment Notes: This segment is used to provide application data for message control purposes.  Example: CNT+2:26'				

## 5. Segments Layout

---

Segment number: 73

<b>SG24</b>	- C	5 - AUT-DTM
<b>AUT</b>	- M	1 - Authentication result
Function: To specify results of the application of an authentication procedure.		
	EDIFACT	GS1 * Description
9280 Validation result value	M an..35	<b>M</b>
9282 Validation key identifier	C an..35	<b>O</b> This data element is used to identify the key which has been/is used to validate the contents of the message.
Segment Notes:  This segment is used to provide details of any authentication procedures which have been applied to the multiple payment order. The use of this segment is, including any algorithms and calculation procedures, dependent on bilaterally agreed conditions between the message sender and receiver.  Example: AUT+7761'		



## 5. Segments Layout

---

Segment number: 75

<b>UNT</b> - M 1 - Message trailer				
Function: To end and check the completeness of a message.				
	EDIFACT	GS1	*	Description
0074	Number of segments in the message	M n..6	<b>M</b>	The total number of segments in the message.
0062	Message reference number	M an..14	<b>M</b>	
Segment Notes: The UNT segment is a mandatory UN/EDIFACT segment. It must always be the last segment in the message.  Example: UNT+74+ME0000001'				

## 5. Segments Layout

---

Segment number: 76

<b>UNZ</b> - M 1 - Interchange trailer				
Function: To end and check the completeness of an interchange.				
	EDIFACT	GS1	*	Description
0036 Interchange control count	M n..6	<b>M</b>		Number of messages or functional groups within an interchange.
0020 Interchange control reference	M an..14	<b>M</b>		Identical to DE 0020 in UNB segment.
Segment Notes: This segment is used to provide the trailer of an interchange. UNZ+5+1234555' DE 0036: If functional groups are used, this is the number of functional groups within the interchange. If functional groups are not used, this is the number of messages within the interchange.				

## 6. Examples

---

### Example 1 - Simple Payment Order

The following is an example of a simple payment order message sent by an ordering party identified by GLN 5422331123459 providing details of a simple payment being made to the beneficiary, Mr. J. Holmes.

The message, identified by the number 538851, which was generated on the 1st of August 2002, provides details of payments totalling 50000 Euros (EUR). The banks of the ordering party and beneficiary are identified using the ISO bank identification codes. The message provides details related to three invoices identified by the numbers 43534, 52000, and 52447.

UNH+ME0000001+PAYMUL:D:01B:UN:EAN003'	Message header
BGM+452+538851+9'	Multiple payment order number 538851
DTM+137:20020801:102'	Date of message 1st of August 2002
FII+MR++KREDBEBB:25:5'	Message recipient identified by ISO bank identification code KREDBEBB
NAD+MS+5422331123459::9'	Message sender identified by GLN 5422331123459
LIN+1'	Start of level B
DTM+203:20020828:102'	Requested execution date 28th of August 2002
RFF+AEK:AX-12232'	Payment order reference number identifying B level is AX-12232
MOA+9:50000:EUR'	Amount due/payable equals 50000 EUR
FII+OR+994-9876511:ABC EXPRESS+KREDBEBB:25:5'	Ordered bank and account number identification
NAD+OY+5422331123459::9'	Ordering customer identified by GLN 5422331123459
SEQ++1'	Start of level C, number 1
MOA+9:15000:EUR'	Amount due/payable equals 15000 EUR
RFF+PQ:76632-1223-21'	Reference provided to payment order number 76632-1223-21
RFF+CR:6812-X'	Customer reference number identifying C level is 6812-X
RFF+RA:43534'	reference to remittance advice number 43534
FII+BF+994-3277711:J HOLMES+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+++MR J HOLMES'	Structured name identification of the beneficiary
SEQ++2'	Start of level C, number 2
MOA+9:20000:EUR'	Amount due/payable equals 20000 EUR
RFF+PQ:76632-1288-33'	Reference provided to payment order number 76632-1288-33
RFF+CR:6844-X'	Customer reference number identifying C level

## 6. Examples

	is 6844-X
RFF+RA:52000'	Reference to remittance advice number 52000
FII+BF+994-3277711:J HOLMES+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+++MR J HOLMES'	Structured name identification of the beneficiary
SEQ++3'	Start of level C, number 3
MOA+9:15000:EUR'	Amount due/payable equals 15000 EUR
RFF+PQ:76632-1221-20'	Reference provided to payment order number 76632-1221-20
RFF+CR:6914-X'	Customer reference number identifying C level is 6914-X
RFF+RA:52447'	Reference to remittance advice number 52447
FII+BF+994-3277711:J HOLMES+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+++MR J HOLMES'	Structured name identification of the beneficiary
UNT+33+ME0000001'	Total number of segments in the message equals 33

### Example 2 - Extended Payment Order

The following is an example of a multiple payment order message sent by the ordering party ACE Express Couriers providing details of extended payments being made to the beneficiary identified by GLN 5312345123456.

The message, identified by the number 4021, which was generated on the 21st of June 2002, provides details of payments totalling 8500 Euros (EUR) The banks of the ordering party and beneficiary are identified using the ISO bank identification codes.

Invoice Number	Invoice Value	Invoice Date	Amount Remitted	Adjustment Value	References
434	120	2002/05/10	120		Order No: 664
520	160	2002/05/13	160		Order No: 357
447	6420	2002/05/13	6000	420	Order No: 734 Delivery Note No: 187-A1
466	1800	2002/05/13	1800	1800	

UNH+ME0000001+PAYMUL:D:01B:UN:EAN003'	Message header
BGM+452+4021+9'	Multiple payment advice number 4021
DTM+137:20020621:102'	Date of message 21st of June 2002
FII+MR++DRESDEFF:25:5'	Message recipient identified by ISO bank identification code DRESDEFF
NAD+MS+++ACE EXPRESS COURIERS'	Message sender identified as Ace Express



## 6. Examples

---

	Couriers
LIN+1'	Start of B level
DTM+203:20020728:102'	Requested execution date 28th of July 2002
RFF+AEK:7632'	Payment order reference number identifying B level is 7632
MOA+9:8500:EUR'	Amount due/payable equals 8500 EUR
FII+OR+123-9876511:ABC EXPRESS+DRESDEFF:25:5'	Ordered bank and account number identification
NAD+OY+++ACE EXPRESS COURIERS'	Identification of the ordering customer
SEQ++1'	Start of C level
MOA+9:8500:EUR'	Amount due/payable equals 8500 EUR
RFF+PQ:632-23-21'	Payment reference number 632-23-21
RFF+CR:65532'	Customers reference number identifying C level is 65532
FII+BF+994-32366211+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+5312345123456::9'	Beneficiary identified by GLN 5312345123456
PRC+8'	Structured information follows
DOC+380+434'	Identification of invoice number 434
MOA+38:120'	Invoice item amount 120
MOA+11:120'	Amount paid 120
DTM+137:20020510:102'	Remittance advice date 10th of June 2002
RFF+ON:664'	Identification of order number 664
DOC+380+520'	Identification of invoice number 520
MOA+38:160'	Invoice item amount 160
MOA+11:160'	Amount paid 160
DTM+137:20020613:102'	Remittance advice date 13th of June 2002
RFF+ON:357'	Identification of order number 357
DOC+380+447'	Identification of invoice number 447
MOA+38:6420'	Invoice item amount 6420
MOA+12:6000'	Amount paid 6000
DTM+137:20020613:102'	Remittance advice date 13th of June 2002
RFF+ON:734'	Identification of order number 734
AJT+3'	Adjustments due to damaged goods
MOA+5:420'	Adjusted amount equals 420

## 6. Examples

RFF+DQ:187-A1'	Reference to Delivery Note number 187-A1
DOC+380+466'	Identification of invoice number 447
MOA+38:1800'	Invoice item amount 1800
MOA+12:1800'	Amount paid 1800
DTM+137:20020613:102'	Remittance advice date 13th of June 2002
GIS+37'	End of remittance data
MOA+139:8500:EUR'	Total payment amount 8500 EUR
UNT+43+ME0000001'	Total number of segments in the message equals 43

### Example 3 - Multiple Payment Order

The following is an example of a multiple payment order message sent by the ordering party ABBSA Hyper Markets providing details of multiple payments being made to its suppliers.

The message, identified by the number 6871, which was generated on the 21st of June 2002, provides details of payments totalling 200000 Euros (EUR) The banks of the ordering party and beneficiary are identified using the ISO bank identification codes No remittance data is included in the message but references to EANCOM® remittance advice messages are provided.

Beneficiary	Beneficiary's Bank	Remittance Advice No
5087654111110	KEDBEBB	4018
		4160
5480011222229	UBSCHZHA	3988
		4022
		4089
5312888111118	GENBBEBB	3051
		4029
4021212111113	DRESDEFF	4180
		4199

UNH+ME0000001+PAYMUL:D:01B:UN:EAN003'	Message header
BGM+452+6871+9'	Multiple payment order number 6871
DTM+137:20020621:102'	Message date 21st of June 2002
FII+MR++DRESDEFF:25:5'	Message recipient identified by ISO bank identification code DRESDEFF
NAD+MS+++ABSAA HYPER MARKETS'	Message sender identified as ABSAA Hyper Markets
LIN+1'	Start of B level
DTM+203:20020728:102'	Requested execution date 28th of July 2002
RFF+AEK:UCB6931'	Payment order reference number identifying level B is UCB6931
MOA+9:200000:EUR'	Amount due/payable equals 200000 EUR

## 6. Examples

---

FII+OR+123-0032219:ABSAA+DRESDEFF:25:5'	Ordered bank and account number identification
NAD+OY+++ABSAA HYPER MARKETS'	Identification of the ordering customer
SEQ++1'	Start of C level number 1
MOA+9:68000'	Amount due/payable equals 68000 EUR
RFF+PQ:517662'	Payment reference number 517662
RFF+CR:8462'	Customer reference number identifying C level is 8462
RFF+RA:4018'	Remittance advice number 4018
FII+BF+994-32366211+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+5087654111110::9'	Beneficiary identified by GLN 5087654111110
SEQ++2'	Start of C level number 2
MOA+9:5400'	Amount due/payable equals 5400 EUR
RFF+PQ:522662'	Payment reference number 522662
RFF+CR:8802'	Customer reference number identifying C level is 8802
RFF+RA:4160'	Remittance advice number 4160
FII+BF+994-32366211+KREDBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+5087654111110::9'	Beneficiary identified by GLN 5087654111110
SEQ++3'	Start of C level number 3
MOA+9:12680'	Amount due/payable equals 12680 EUR
RFF+PQ:651662'	Payment reference number 651662
RFF+CR:8868'	Customer reference number identifying C level is 8868
RFF+RA:3988'	Remittance advice number 3988
FII+BF+650-52217711+UBSCHZHA:25:5'	Beneficiary's bank and account number identification
NAD+BE+5480011222229::9'	Beneficiary identified by GLN 5480011222229
SEQ++4'	Start of C level number 3
MOA+9:11000'	Amount due/payable equals 11000 EUR
RFF+PQ:63362'	Payment reference number 63362
RFF+CR:8928'	Customer reference number identifying C level is 8928
RFF+RA:4022'	Remittance advice number 4022
FII+BF+650-52217711+UBSCHZHA:25:5'	Beneficiary's bank and account number

## 6. Examples

---

	identification
NAD+BE+5480011222229::9'	Beneficiary identified by GLN 5480011222229
SEQ++5'	Start of C level number 5
MOA+9:4000'	Amount due/payable equals 4000 EUR
RFF+PQ:82882'	Payment reference number 82882
RFF+CR:9068'	Customer reference number identifying C level is 9068
RFF+RA:4089'	Remittance advice number 4089
FII+BF+650-52217711+UBSCHZHA:25:5'	Beneficiary's bank and account number identification
NAD+BE+5480011222229::9'	Beneficiary identified by GLN 5480011222229
SEQ++6'	Start of C level number 6
MOA+9:42000'	Amount due/payable equals 42000 EUR
RFF+PQ:441740'	Payment reference number 441740
RFF+CR:6208'	Customer reference number identifying C level is 6208
RFF+RA:3051'	Remittance advice number 3051
FII+BF+520-87552250+GENBBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+5312888111118::9'	Beneficiary identified by GLN 5312888111118
SEQ++7'	Start of C level number 7
MOA+9:25000'	Amount due/payable equals 25000 EUR
RFF+PQ:462150'	Payment reference number 462150
RFF+CR:7140'	Customer reference number identifying C level is 7140
RFF+RA:4029'	Remittance advice number 4029
FII+BF+520-87552250+GENBBEBB:25:5'	Beneficiary's bank and account number identification
NAD+BE+5312888111118::9'	Beneficiary identified by GLN 5312888111118
SEQ++8'	Start of C level number 8
MOA+9:14000'	Amount due/payable equals 14000 EUR
RFF+PQ:504401'	Payment reference number 504401
RFF+CR:8001'	Customer reference number identifying C level is 8001
RFF+RA:4180'	Remittance advice number 4180
FII+BF+988-53324781+DRESDEFF:25:5'	Beneficiary's bank and account number identification

## 6. Examples

---

NAD+BE+4021212111113::9'	Beneficiary identified by GLN 4021212111113
SEQ++9'	Start of C level number 9
MOA+9:17920'	Amount due/payable equals 17920 EUR
RFF+PQ:841401'	Payment reference number 841401
RFF+CR:8552'	Customer reference number identifying C level is 8552
RFF+RA:4199'	Remittance advice number 4199
FII+BF+988-53324781+DRESDEFF:25:5'	Beneficiary's bank and account number identification
NAD+BE+4021212111113::9'	Beneficiary identified by GLN 4021212111113
UNT+75+ME0000001'	Total number of segments in the message equals 75

Note:

The EDI interchange will include the UNB..UNZ segments and, if applicable, the UNG..UNE segments. (See part 1 section 5.7).